

# MODEL: PAC-USWHS002-WF-2




Job Name:

System Reference:

Date:

## WIRELESS INTERFACE 2

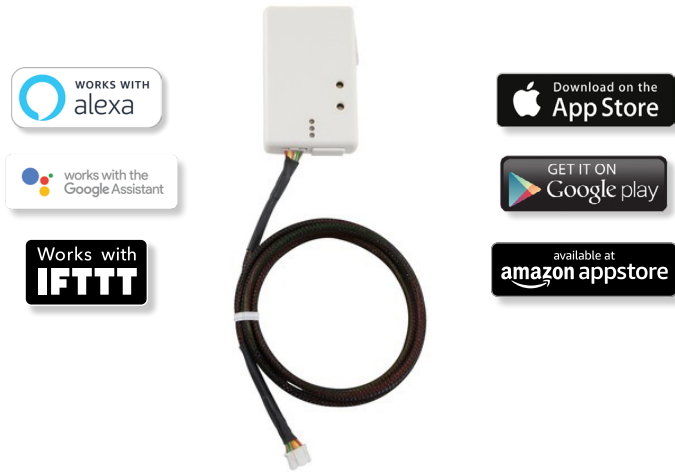

## COMMUNICATION SETUP

- Bluetooth connection only used during startup



## SPECIFICATIONS

- Allows for a Mitsubishi Electric indoor unit to communicate with the kumo cloud® app and web service
- Works simultaneous with MHK1 and MHK2
  - Due to power requirements of the Wireless Interface 2 and MHK2, only the following units will be able to power both devices with the indoor unit:


NOTE: Refer to compatibility chart

- SEZ
- SVZ
- SLZ
- P-Series
- City Multi®

- Wireless connection over local Wi-Fi network with kumo cloud app
- Remote connection through kumo cloud app
- Connection to indoor unit via CN105
- Mode button to enter Bluetooth Configuration to pair with Smart Phone with kumo cloud app
- Reset button to reset all settings
- 3 LEDs to display device status
- Dimensions: (H x W x D) 1.82 x 0.69 x 2.92 inches
- The Wireless Interface 2 must connect to a 2.4 GHz Wi-Fi network.
  - The Wireless Interface 2 will not work on a 5 GHz Wi-Fi network.
  - The Wireless Interface can only connect to Wi-Fi channels 1-11.
  - For the best performance connect the Wireless Interface to a 2.4 GHz only SSID, but there are some multi-band Wi-Fi networks that can correctly manage a 2.4 GHz only device.
  - Please verify if your multi-band Wi-Fi router can manage 2.4 GHz only devices
- Encryption: AES
- Authentication: PSK
- Works with the Google Assistant
- Works with Amazon Alexa

## REQUIREMENTS


- Compatible Mitsubishi Electric indoor units
  - See remote controller compatibility charts
- Wireless Router
  - Internet access required for initial setup and scheduling
- Wireless Interface (PAC-USWHS002-WF-2)
- Compatible Software Platforms with the kumo cloud app:
  - iOS 8.0 or later
  - Android 4.1 or later
  - Fire OS 4.1 or later




## HARDWARE FEATURES

No	Item	Description
1	Mode Button	It activates Bluetooth configuration mode.
2	RESET button	It resets the system and ALL settings.
3	LED1 (Blue)	It shows the wireless communication state.
4	LED2 (Amber)	Displays confirmation of reset button.
5	LED3 (Green)	Displays Power status.

## REMOTE CONNECTION THROUGH INTERNET

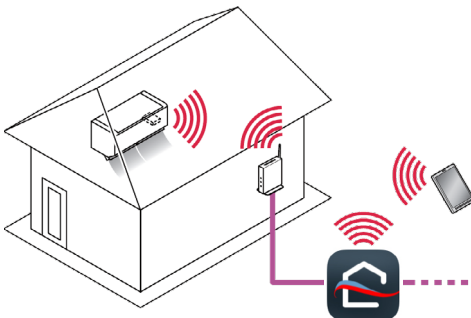

## WIRELESS CONNECTION THROUGH LOCAL WI-FI NETWORK

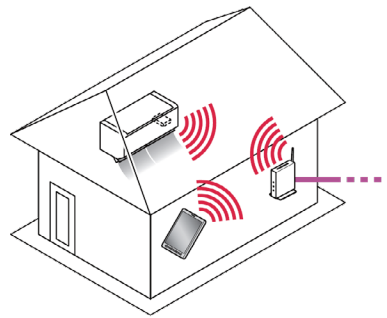

# WIRELESS INTERFACE 2 AND MHK2 NOTES & COMPATIBILITY CHARTS

## Wireless Interface 2 and MHK2 Notes:

1. The Wireless Interface 2 has the same indoor unit compatibility list as the Wireless Interface
2. The MHK2 and MHK1 are the only compatible controls product that can use the Wireless Interface 2's second CN105 port.
3. The MHK2 AUTO mode and scheduling features can be used when connected to the Wireless Interface 2
  - The kumo cloud app cannot put the indoor unit into AUTO mode when connected to an MHK2
    - » The kumo cloud app can adjust the set point while in AUTO mode
    - » MHK2 touch panel is the only way to put the indoor unit into AUTO mode.
  - MHK2 Installer Setting Option #150 determines if MHK2 or kumo cloud establishes the schedule
4. A MA remote controller cannot be used when an indoor unit is connected to a Wireless Interface 2 and MHK2
5. The IT Extender (PAC-WHS01IE-E) cannot be used when an indoor unit is connected to Wireless Interface 2 and MHK2
6. The Wireless Interface 2 and MHK2 combination is compatible with the same indoor units as the Wireless Interface 2 compatibility table:

### Wireless Interface 2 and MHK2 Compatibility Chart

All the same CITY MULTI®, P-Series, and M-Series Indoor units that the Wireless Interface 2 is compatible with on page 3

# WIRELESS INTERFACE 2 AND MHK1 NOTES & COMPATIBILITY CHARTS

## Wireless Interface 2 and MHK1 Notes:

1. The Wireless Interface 2 has the same indoor unit compatibility list as the Wireless Interface 1.
2. The MHK1 is the only compatible controls product that can use the Wireless Interface 2's second CN105 port.
3. The MHK1 AUTO mode and scheduling have to be disabled when connected to the Wireless Interface 2's second CN105 port. MHK1 needs to set two function codes to be compatible:
  - Set MHK1 Function Code #144 "System Changeover" to 0 "Manual Changeover (Heat, Off, Cool)"
  - Set MHK1 Function Code #152 "Scheduled Off" to 0 "Not Shown"
4. A MA remote controller cannot be used when an indoor unit is connected to a Wireless Interface 2 and MHK1
5. The IT Extender (PAC-WHS01IE-E) cannot be used when an indoor unit is connected to Wireless Interface 2 and MHK1
6. The Wireless Interface 2 and MHK1 combination only work with the following indoor units:

### CITY MULTI® Wireless Interface 2 and MHK1 Compatibility Chart

All the same CITY MULTI Indoor units that the Wireless Interface 2 is compatible with on page 3

### P-Series Wireless Interface 2 and MHK1 Compatibility Chart

			PKA-A12LA.TH	
			PKA-A18LA.TH	
PCA-A**KA7.TH	PEAD-A**AA7	PLA-A1**EA7	PKA-A**HA7	PVA-A**AA7

### M-Series Wireless Interface 2 and MHK1 Compatibility Chart

MSZ-GL**NA-U1	SEZ-KD**NA4R1.TH	SLZ-KA**NAR1.TH	SLZ-KF**NA.TH	SVZ-KP**NA
MSZ-GS**NA-U1				

\*\* All capacities are compatible

# PAC-USWHS002-WF-2: COMPATIBILITY CHART

CITY MULTI®	
<b>PMFY-NMBU</b>	(E) NO (ER5) ADPT (After April 2012)
<b>PEFY-NMU</b>	(NMU-E) NO
<b>PEFY-NMAU</b>	(E) NO (E2) ADPT (After April 2012) (E3) OK (E4) OK
<b>PEFY-NMHSU</b>	(E) ADPT OK (After Oct 2015)
<b>PEFY-NMHU</b>	(E) NO (E2) ADPT (After April 2012)
<b>PEFY-NMLU</b>	(E) NO
<b>PEFY-NMSU</b>	(E) NO (ER2) ADPT (After June 2012)
<b>PLFY-NAMU</b>	(A) NO (E) NO
<b>PLFY-NBMU</b>	(E) NO (ER2) ADPT (After April 2012) (E2) OK
<b>PLFY-NCMU</b>	(E) NO (ER4) ADPT (After June 2012)
<b>PLFY-NEMU</b>	(E) OK
<b>PLFY-NLMU</b>	(E) NO
<b>PCFY-VKM</b>	NO
<b>PLFY-NFMU</b>	OK
<b>PCFY-NGMU</b>	(E) NO
<b>PCFY-NKMU</b>	(E) NO (E.TH) NO (ER1.TH) ADPT (After June 2012)
<b>PFFY-NEMU</b>	(E) ADPT (After April 2012)
<b>PFFY-NRMU</b>	(E) ADPT (After April 2012)
<b>PVfy-E00</b>	(A) OK (B) OK
<b>PVfy-NAMU</b>	(E) OK
<b>PKFY-NAMU</b>	(E) NO
<b>PKFY-NFMU</b>	(E) NO
<b>PKFY-NGMU</b>	(E) NO
<b>PKFY-NBMU</b>	(E) NO (E2) ADPT (E2R1) ADPT (After April 2012)
<b>PKFY-NHMU</b>	(E) NO (E2) ADPT (After May 2012)
<b>PKFY-NKMU</b>	(E) NO (E2) ADPT (E2.TH) ADPT (After June 2012)
<b>PKFY-NLMU</b>	(E) OK

M-Series	
<b>MSZ/Y-A</b>	NO
<b>MSZ/Y-D</b>	(NA) NO (NA-8) OK
<b>MSZ-EF</b>	OK
<b>MSZ-FD</b>	NO
<b>MSZ-FE</b>	09, 12 (NA) NO 09, 12 (NA-8) OK 18 (NA) OK
<b>MSZ-FH</b>	OK
<b>MSZ-FS</b>	OK
<b>MSZ/Y-GE</b>	06 to 18 (NA) NO (NA-8) OK (NA-9) OK 24 (NA) OK
<b>MSZ/Y-GL</b>	OK
<b>MSZ/Y-GS</b>	OK
<b>MSZ-HE</b>	NO
<b>MSZ-HM</b>	OK
<b>MSZ-JP</b>	OK
<b>MS-WA</b>	NO
<b>MSZ-WR</b>	OK
<b>MFZ-KA</b>	OK
<b>MFZ-KJ</b>	OK
<b>MVZ</b>	(AA4) OK (AA7) OK
<b>SVZ-KP</b>	OK
<b>SEZ-KD</b>	(NA) NO (KD4) OK (KD4) OK
<b>SLZ-KA</b>	OK
<b>SLZ-KF</b>	OK
<b>MLZ-KP</b>	OK

P-Series	
<b>PCA</b>	(GA) NO (KA) NO (KA4) OK (KA4.TH) OK (KA6) OK (KA7) OK
<b>PEA</b>	(AA) NO (AA4) OK (AA4R1.TH) OK (AA6) OK
<b>PEAD</b>	(AA) NO (AA4) OK (AA5) OK (AA7) OK
<b>PKA</b>	(FA) NO (GA) NO (HA) NO (HAL) NO (HA4) OK (HA6) OK (HA7) OK (KA) NO (KA4) OK (KA6) OK (KA7) OK (LA) OK
<b>PLA</b>	(AA) NO (BA) NO (BA-1) NO (BA4) OK (BA6) OK (EA7) OK
<b>PVA</b>	(AA4) OK (AA7) OK

## Legend:

**OK** = Compatible

**NO** = Not compatible

**ADPT** = Install IT signal adapter PAC-IT51AD-E or PAC-IT52AD-E for compatibility

1340 Satellite Boulevard, Suwanee, GA 30024  
Toll Free: 800-433-4822 [www.mehvac.com](http://www.mehvac.com)