

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

STAINLESS STEEL PEX CLAMP RINGS

Clamp Rings

360° uniform compression surface pressure.

Closed Interlock: high radial loads, smooth outer contour.

For use with a ratcheting cinch tool with visual indicator.

Not for use with PEX-AL-PEX.

Working Pressure, Non Shock (PSI): 100 psi
Maximum working temperature: 180°F

Pictured:
SS Cinch Ring





MATERIAL SPECIFICATION

PART	MATERIAL
1 PEX cinch ring	304 stainless steel

DIMENSIONS

Size	A	B	Open	Compressed (Max)
3/8"	0.31	0.28	0.52	0.43
1/2"	0.39	0.28	0.69	0.56
3/4"	0.39	0.35	0.92	0.79
1"	0.39	0.39	1.16	1.04

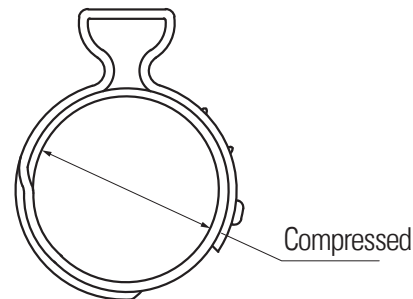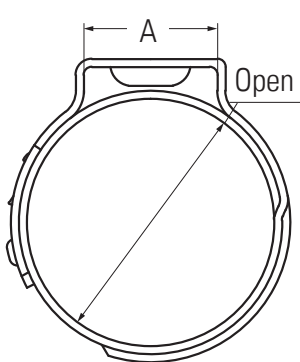

Pictured:
SS Cinch Ring
Open and Compressed

Certifications / Listing:

Third-party certified

ANSI/NSF 14: Plastic piping system components and related materials.

ASTM F2098: Stainless steel clamps for securing to metal insert and plastic insert fittings.