



Submittal Data Sheet

Project Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____

Performance

MERV 13 Kit Model No.: DACA-FXMQ30131K
Initial Pressure Drop (IPD in H₂O): See Table 1.0
Final Pressure Drop (FPD in H₂O): .390


Details

Air Filter Dimensions (HxWxD): 11.38" x 19.00" x 3.75"
Cabinet Dimensions (HxWxD): 11.75" x 39.00" x 11.00"
Net Weight (lbs):
Air Filter, Cabinet and Packaging: 22.94
Air Filters: (2 required): 2.20
Cabinet: 18.45
Replacement Filters:
Part No. (box of 6): DACA-MQP-30-1B
Description: Air Filter, AmAir 1300 Exact Size MERV 13

Table 1.0 Performance Data

Model No.	Airflow CFM	Filter IPD	Filter FPD
Daikin			
FXMQ15PAVJU	560	.050	.390
FXMQ18PAVJU	636	.060	.390
FXMQ24PAVJU	688	.070	.390
SkyAir			
FBQ18PVJU	635	.060	.390
FBQ24PVJU	688	.070	.390
FBQ30PVJU	882	.100	.390

Appearance – MERV 13 Air Filter and Cabinet Kit

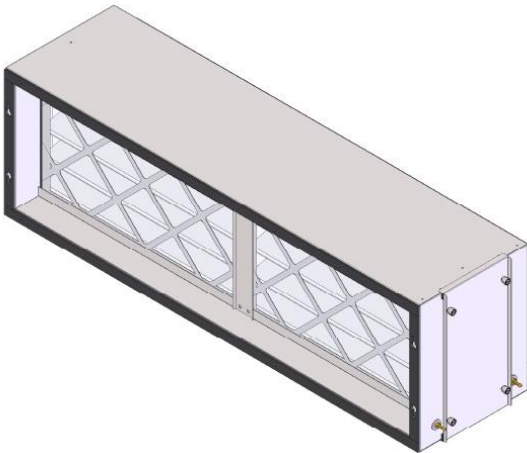



Submittal Data Sheet

Project Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____
Dimensional Drawing – DACA-FXMQ30131K

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____

