




APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

FEATURES

- ✓ Ability to operate line voltage 3-speed fan motor with low voltage controls
- ✓ Compatible with 4 pipe and 2 pipe systems with auto-changeover
- ✓ 20 VA - 24VAC power supply
- ✓ Suitable for 1/8 HP motors
- ✓ 1/4" Quick connect terminals

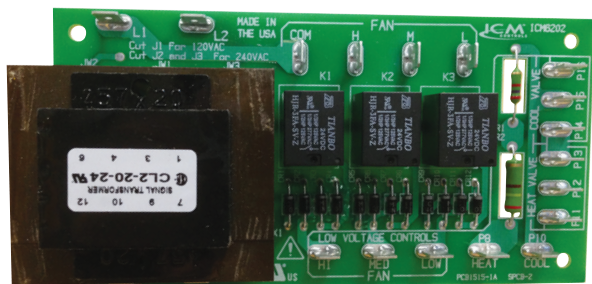

OVERVIEW

The **ICM6202** allows 3-speed fan with voltage of either 115 VAC or 230 VAC to be controlled by a low voltage (24 VAC) signal or thermostat and provides low voltage control of heating/cooling valve. To use 115 VAC 3-speed fan, cut jumper JW1. To use 230 VAC 3-speed fan, cut jumpers JW2 and JW3.

SPECIFICATIONS

- **Input:**
 - **Transformer Primary:** 115 VAC/230 VAC; 50/60Hz
 - **Fan Inputs HI, MED, LOW:** Nominal 17mA @ 24 VAC
 - **Heat & Cool:** 0.83A @ 24 VAC
- **Outputs:**
 - **Transformer Secondary:** 24 VAC; 20 VA
 - **Relay outputs H, M, L:** 1/8HP @ 115 VAC, 10A @ 240 VAC resistive max
 - **Heat & Cool Valves:** 0.83A @ 24 VAC
- **Mechanical:**
 - 5.850" x 3.000" x 1.850"
 - Mounts in standard 3" track