

Project Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____

Performance

Indoor Unit Model No: FTXS24LVJU
 Outdoor Unit Model No: RXS24LVJU
 Rated Cooling Capacity (Btu/hr): 21500
 Sensible Capacity (Btu/hr): 16880
 Max/Min Cooling Capacity (Btu/hr / kW): 21500/7800
 Cooling Input Power (kW): 1.72
 SEER: 20
 Rated Heating Capacity (Btu/hr): 25400
 Max/Min Heating Capacity (Btu/hr / kW): 25400/7800
 Heating Input Power (kW): 2.21
 Heating COP (Btu/hr / Btu/hr): 3.37
 HSPF: 10.6

Indoor Unit Type: Wall Mounted
 Condensing Unit Type: High SEER Heat Pump
 Rated Cooling Conditions: Indoor: 80°F DB/67°F WB
 Outdoor: 95°F DB/75°F WB
 Rated Heating Conditions: Indoor: 70°F DB/60°F WB
 Outdoor: 47°F DB/43°F WB
 Rated Piping Length(ft): 25
 Rated Height Separation(ft): 0

Indoor Unit Details

Power Supply (V/Hz/Ph): 208-230/60/1ph
 Power Supply Connections: L1, L2, Ground
 Min Circuit Amps MCA (A): N/A
 Max Overcurrent Amps MFA (A): N/A
 Dimensions (HxWxD): 13-3/8x41-5/16x9-3/4
 Panel (HxWxD): N/A
 Net Weight (lbs): 31
 Weight with Panel (lbs): N/A

Airflow Rate (CFM wet coil): 643/494/350/328
 Moisture Removal (pt/h): 1.2
 Gas Pipe Connection (inch): 5/8
 Liquid Pipe Connection (inch): 1/4
 Condensate Connection (inch): 5/8
 Sound Pressure Level (dBA): 51
 Sound Power Level (dBA): 67
 Static Pressure Rated/Max (inWg): 0 / 0/0

Condensing Unit Details

Power Supply (V/Hz/Ph): 208-230/60/1ph
 Power Supply Connections: L1, L2, Ground
 Min. Circuit Amps MCA (A): 17.5
 Max. Overcurrent Amps MFA (A): 20
 Max. Starting Current MSC(A):
 Rated Load Amps RLA (A): 7.1
 Dimensions (HxWxD): 30-5/16x35-7/16x12-5/8
 Net Weight (lbs): 159

Compressor Type: Inverter
 Capacity Control Range (%):
 Airflow Rate (CFM): 1924
 Gas Pipe Connection (inch): 5/8
 Liquid Pipe Connection (inch): 1/4
 Sound Pressure Level (dBA): 52
 Sound Power Level (dBA): 66

System Details

Refrigerant Type: R-410A
 Holding Refrigerant Charge (lbs): 5.7
 Additional Charge (oz/ft): 0.21
 Pre-charge Piping (Length ft): 32.8 ft
 Max. Pipe Length (Total ft): 98.4 ft

Max. Pipe Length (Vertical ft): 65.6 ft
 Cooling Operation Range (°F): 14 - 115
 Cooling Range w/Baffle (°F): 0 - 115
 Heating Operation Range (°F): 5 - 64
 Heating Range w/Baffle (°F): 0 - 77


Project Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____

Dimensional Drawing - Indoor Unit

FTXS24LVJU

FTXS24LVJU

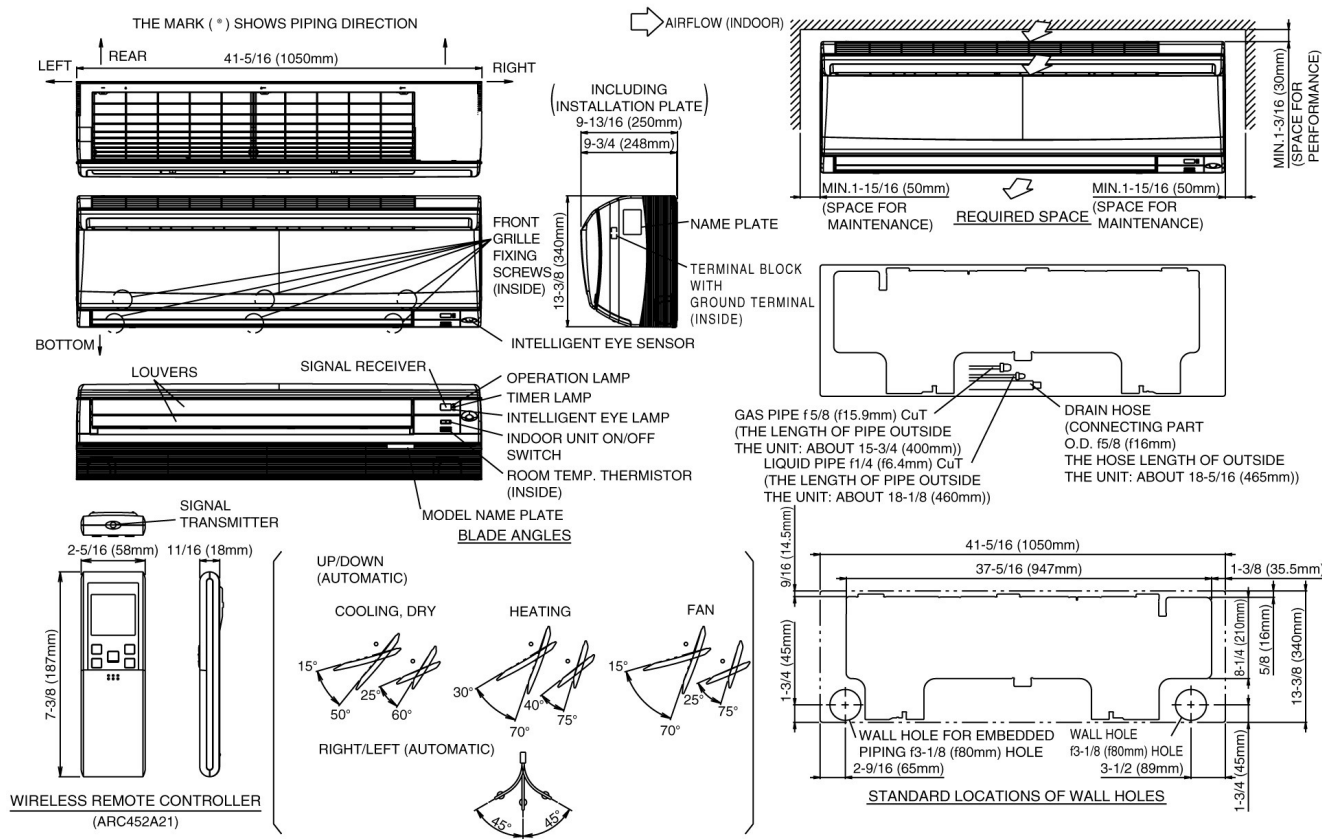


Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Dimensional Drawing - Condensing Unit

RXS24LVJU

RXS24LVJU

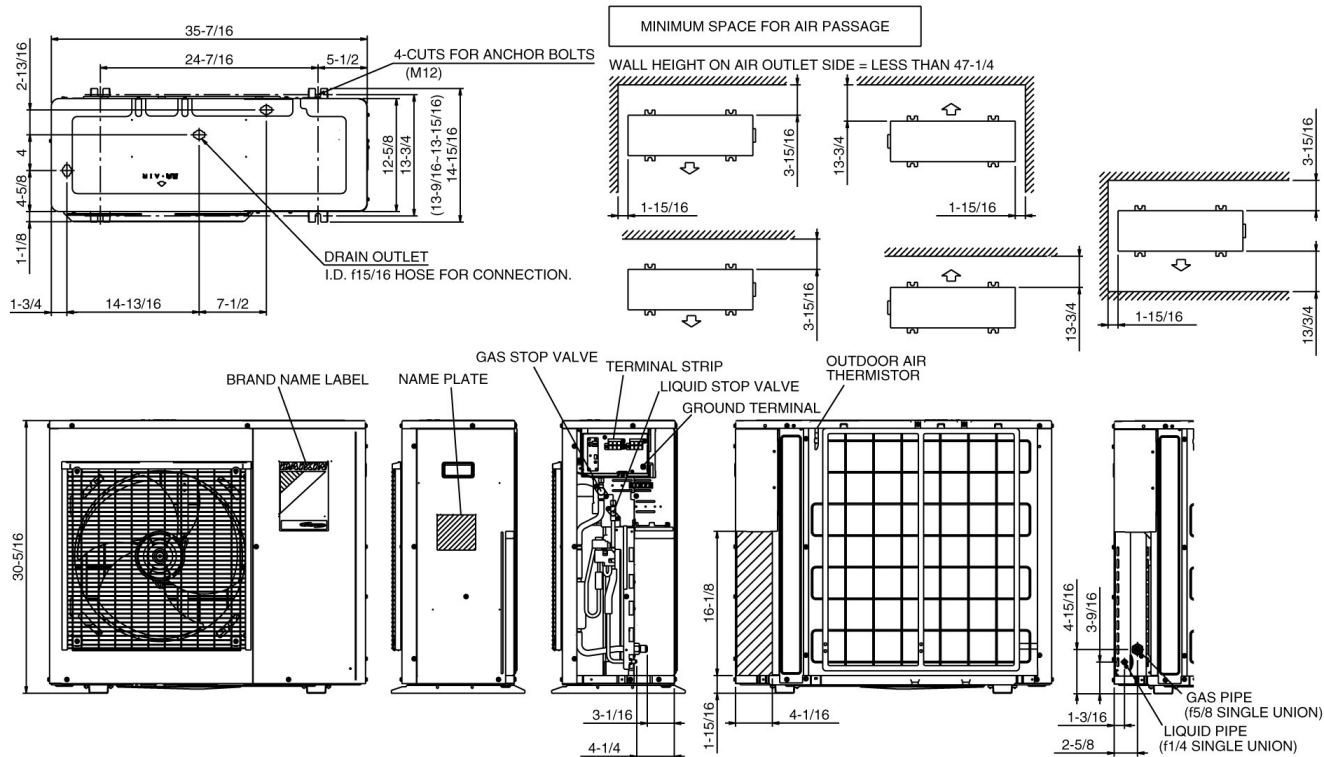

Project Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____

FTXS24LVJU



RXS24LVJU



FTXS24LVJU

Std U.S. Warranty: 7yrs Compressor, 5yrs Parts.
Optional accessories like Wind Baffle, Wired Remote Controller, Mounting Bracket can be included at additional charges

RXS24LVJU

Std U.S. Warranty: 7yrs Compressor, 5yrs Parts.
Optional accessories like Wind Baffle, Wired Remote Controller, Mounting Bracket can be included at additional charges