

## Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*] , SEER2 15.2 , EER2 12.0

### STANDARD FEATURES:

- High-efficiency scroll compressor
- Copper tube/enhanced aluminum fin coil -5mm diameter on 1.5-3.0T
- Fully charged for 15' of tubing length
- Factory-installed filter drier
- Service valves with sweat connections and easy-to-access gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified, ETL Listed

### CABINET FEATURES:

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Steel louver coil guard
- Rust-resistant coated screws
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



**Submittal Data Sheet**

15.2 SEER2, Air Conditioner System,4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*] , SEER2 15.2 , EER2 12.0

**SYSTEM PERFORMANCE**

Outdoor Unit Model No.:	GSXH504810A*	Description :	15.2 SEER2, Air Conditioner System, 4.0 Ton Outdoor System
Indoor Unit Model No.:	CAPF4961D6D*		
TXV/PISTON :	TX5N4		
Furnace Unit Model No.:	GMVC961205DN		
Rated Cooling Conditions:	Outdoor (°F DB/WB):N/A/N/A Indoor (°F DB/WB):N/A/N/A	Rated Heating Conditions:	Outdoor (°F DB/WB):N/A/N/A Indoor (°F DB/WB):N/A/N/A
Rated Cooling Capacity (Btu/hr):	45000	OD Rated Heating Capacity (Btu/hr)	N/A
EER2:	12.0	EER:	13.0
Heating COP:	N/A	SEER2:	15.2
SEER:	16.0	AFUE:	96

**OUTDOOR UNIT DETAILS : GSXH504810A\***

Power Supply (V/Hz/Ph):	208/230/60/1	Compressor Type:	Scroll
Min. Circuit Amps MCA (A):	26.2	Compressor Stages:	Single Stage
Quantity:	1	Max Overcurrent Protection (MOP) (A):	45
Suction Valve Connection Size (in):	-	Compressor Rated Load Amps :	19.9
Liquid Valve Connection Size (in):	-	Refrigerant Type:	R-410A
Sound Power(High/Med/Low) (dBA):	- / - / -	Holding Refrigerant Charge (oz):	180
Cooling Operation Range (°F DB):	- - -	Additional Charge (oz/ft):	-
Heating Operation Range (°F DB):	N/A	Pre-charge Piping (Length) (ft):	-
Net Weight (lb):	-	Dimensions (HxWxD) (in):	- x - x -
Gross Weight (lb):	277	*Max. Pipe Length (Vertical) (ft):	-
*Max. Pipe Length (Total) (ft):	-		

*\*Refer to Long Line Set Application TP-107 for lines greater than 80 ft. or vertical elevation changes more than 50 ft. for single stage equipment and 25 ft. for 2-stage equipment.*



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



**Submittal Data Sheet**

15.2 SEER2, Air Conditioner System,4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*], SEER2 15.2 , EER2 12.0

**Outdoor ( GSXH504810 ) Dimensional Drawing is not available**



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



## Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*] , SEER2 15.2 , EER2 12.0

### STANDARD FEATURES:

- All-Aluminum evaporator coil
- Optimized for use with R-410A refrigerant
- Check flowrator for cooling and heat pump applications
- Vertical application
- 21" depth for easier attic access
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- AHRI certified
- ETL Listed

### CABINET FEATURES:

- Twenty one inch depth for easier attic access
- Split seam front for easy access
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



### Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*] , SEER2 15.2 , EER2 12.0

#### INDOOR UNIT DETAILS : CAPF4961D6D\*

Quantity:	1	Configuration:	
Cased VS Uncased:	Cased	Dimensions (HxWxD) (in) :	30 x 24-1/2 x 21
Suction Connection Size (in) :	7/8	Net Weight (lb):	76
Liquid Connection Size (in) :	3/8	Gross Weight (lb):	78
Condensate Connection (in) :	3/4	Power Voltage (lb):	-
Current Type :	-	Power Phase:	-
Power Frequency :	-	Min Voltage :	-
Max Voltage :	-	MCA :	-
MOP :	-	Electric Heat Range :	-
Indoor Blower FLA :	-	Fan Motor Output :	-



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.




**Submittal Data Sheet**

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*], SEER2 15.2 , EER2 12.0

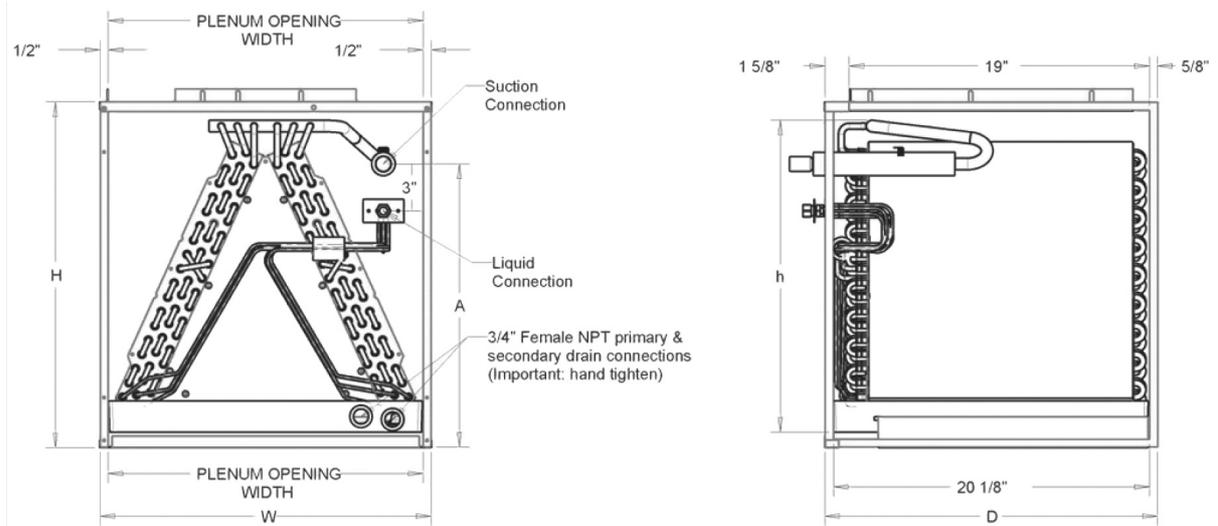

At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



## Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*], SEER2 15.2 , EER2 12.0

### STANDARD FEATURES:

- Heavy-duty aluminized-steel tubular heat exchanger
- Efficient and quiet variable-speed Blower
- Integrated communicating ComfortBridge™ technology
- Commissioning and diagnostics via on board Bluetooth with the CoolCloud™ phone and tablet application
- Stainless-steel sloped secondary heat exchanger
- Silicon Nitride igniter
- Dual 7-segment display
- Color-coded low-voltage terminals
- Two-Stage gas valve
- All models comply with California 40 ng/J
- AHRI Certified, ETL Listed
- Energy Star
- Furnace control board with self-diagnostics and provisions for electronic air cleaner and 120-volt or 24-volt humidifiers

### CABINET FEATURES:

- Multi-position installation: upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1 pipe)
- Easy to install top venting with optional side vent
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (Qleak) less than or equal to 2%
- Fully insulated heat exchanger and blower section
- Bottom or side return air applications
- Heavy-gage steel cabinet with durable finish



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



### Submittal Data Sheet

15.2 SEER2, Air Conditioner System,4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*], SEER2 15.2 , EER2 12.0

#### INDOOR FURNACE UNIT DETAILS : GMVC961205DNB\*

Configuration:	Upflow/Horizontal	Blower/Motor Size:	Variable Speed ECM
NOx:	Natural Gas	Communication:	Communicating
Power Supply (V/Hz/Ph):	115/60/1	Temperature Rise Range High Fire (° F):	35-65
Min. Circuit Amps MCA (A):	13.9	Temperature Rise Range Low Fire (° F):	35-65
Max Overcurrent Protection (MOP) (A):	20.0	High Fire Input Capacity :	120000
AFUE :	96	High Fire Output Capacity :	115320
Vent Diameter (In):	2;3	Low Fire Input Capacity :	84000
Net Weight (lb):	-	Low fire output Capacity :	80724
Gross Weight (lb):	154	Dimensions (HxWxD) (in):	34-1/2 x 24-1/2 x 29
Power Voltage (lb):	115	Current Type :	AC
Power Phase:	1	Power Frequency :	60
Min Voltage :	-	Max Voltage :	-
MCA :	13.9	MOP :	20.0
Electric Heat Range :	-	Indoor Blower FLA :	-
Fan Motor Output :	-	Outdoor Fan LRA :	-



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.




**Submittal Data Sheet**

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A\*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A\* , CA\*F4961\*6D\*+TXV, GMVC961205DNB\*], SEER2 15.2 , EER2 12.0

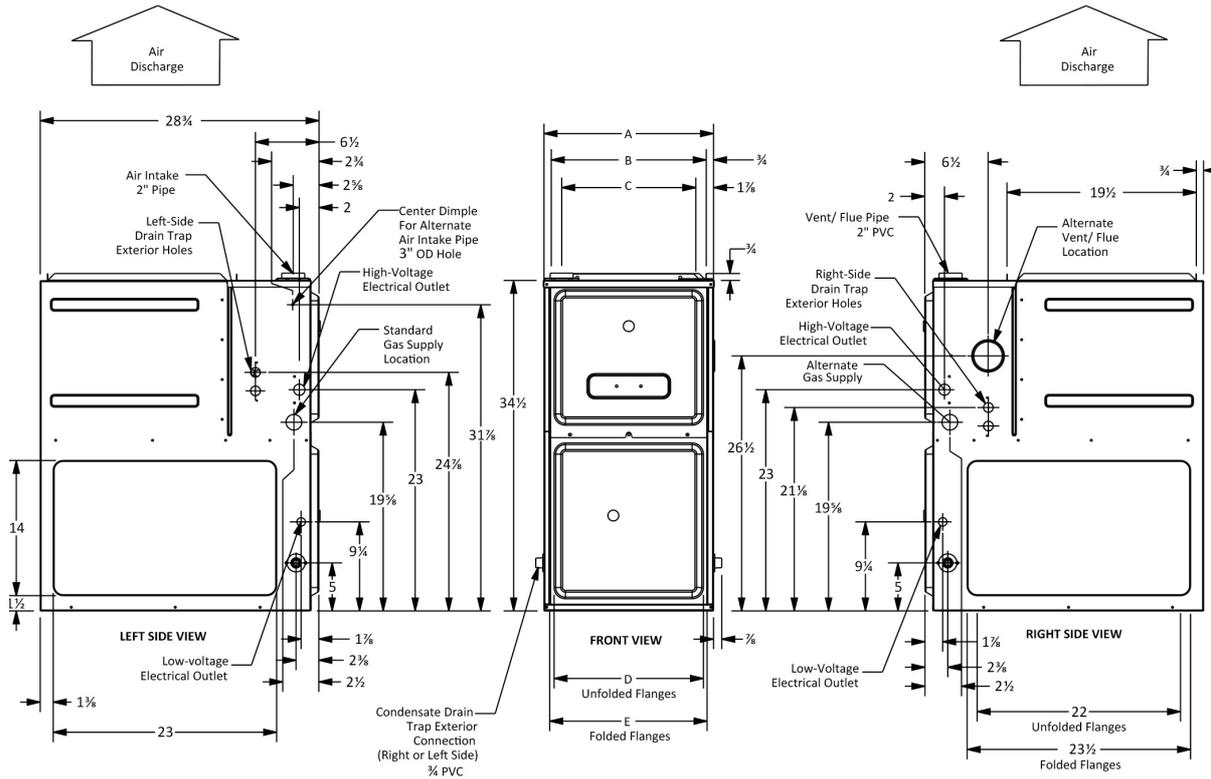

At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.

