

Submittal Data Sheet

15.2 SEER2, Heat Pump System, 5.0 Ton, Outdoor Unit-GSZH506010A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208509802 Products [GSZH506010A* , AMST60DU1400A* ,], SEER2 15.2 , EER2 12.0 , HSPF2 7.8

STANDARD FEATURES:

- High-Efficiency scroll compressor
- SmartShift® technology to ensure quiet reliable defrost
- Copper tube/ enhanced aluminum fin coil- 5mm diameter on 1.5-3.5T
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified
- ETL Listed

CABINET FEATURES:

- Removable grille style top design compliant with UL 60335-2-40
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available)



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Heat Pump System,5.0 Ton, Outdoor Unit-GSZH506010A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208509802 Products [GSZH506010A* , AMST60DU1400A* ,], SEER2 15.2 , EER2 12.0 , HSPF2 7.8

SYSTEM PERFORMANCE

Outdoor Unit Model No.:	GSZH506010A*	Description :	15.2 SEER2, Heat Pump System, 5.0 Ton Outdoor System
Indoor Unit Model No.:	AMST60DU1400A*		
TXV/PISTON :	Factory		
Rated Cooling Conditions:	Outdoor (°F DB/WB):95/75 Indoor (°F DB/WB):N/A/N/A	Rated Heating Conditions:	Outdoor (°F DB/WB):47/43 Indoor (°F DB/WB):N/A/N/A
Rated Cooling Capacity (Btu/hr):	N/A	OD Rated Heating Capacity (Btu/hr)	60000
EER2:	12.0	EER:	N/A
Heating COP:	3.88	SEER2:	15.2
SEER:	N/A	* HSPF:	N/A
* HSPF2:	7.8		

OUTDOOR UNIT DETAILS : GSZH506010A*

Power Supply (V/Hz/Ph):	208/230/60/1	Compressor Type:	Scroll
Min. Circuit Amps MCA (A):	33.0	Compressor Stages:	Two Stage
Quantity:	1	Max Overcurrent Protection (MOP) (A):	50.0
Suction Valve Connection Size (in):	7/8	Compressor Rated Load Amps :	23.7
Liquid Valve Connection Size (in):	-	Refrigerant Type:	R-410A
Sound Power(High/Med/Low) (dBA):	75 / - / -	Holding Refrigerant Charge (oz):	276
Cooling Operation Range (°F DB):	55 - 125	Additional Charge (oz/ft):	0.6
Heating Operation Range (°F DB):	-20 - 70	Pre-charge Piping (Length) (ft):	15
Net Weight (lb):	309	Dimensions (HxWxD) (in):	41.625 x 35.5 x 35.5
Gross Weight (lb):	332	*Max. Pipe Length (Vertical) (ft):	80
*Max. Pipe Length (Total) (ft):	200		

**Refer to Long Line Set Application TP-107 for lines greater than 80 ft. or vertical elevation changes more than 50 ft. for single stage equipment and 25 ft. for 2-stage equipment.*



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet


15.2 SEER2, Heat Pump System,5.0 Ton, Outdoor Unit-GSZH506010A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208509802 Products [GSZH506010A* , AMST60DU1400A* ,], SEER2 15.2 , EER2 12.0 , HSPF2 7.8

MODEL	DIMENSIONS		
	W"	D"	H"
GSZH501810A*	29	29	39½
GSZH502410A*	35½	35½	35½
GSZH503010A*	35½	35½	39½
GSZH503610A*	35½	35½	39½
GSZH504210A*	35½	35½	35½
GSZH504810A*	35½	35½	36½
GSZH506010A*	35½	35½	41½

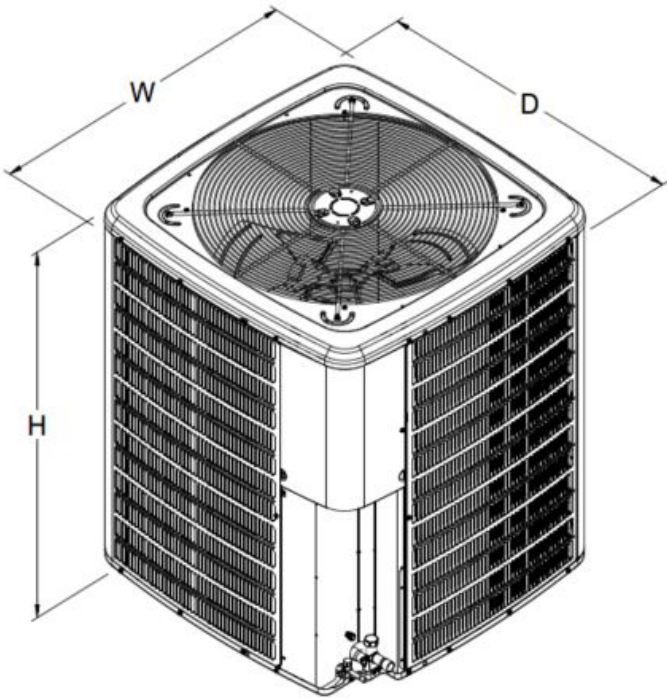

At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Heat Pump System, 5.0 Ton, Outdoor Unit-GSZH506010A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208509802 Products [GSZH506010A* , AMST60DU1400A* ,], SEER2 15.2 , EER2 12.0 , HSPF2 7.8

STANDARD FEATURES:

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Direct drive, 9-speed ECM blower motor
- Factory installed 7mm AlumaFin7™ Evaporator Coil on 1½ to 3½ Ton models and 3/8 in. Evaporator Coil on 4 to 5 Ton models
- All-aluminum evaporator coil with high-performance coated fin stock
- Coil mounting track for quick repositioning
- Optimized for use with R-410A refrigerant
- Cabinet air leakage less than 2.0% at 1.0 inch H2O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H2O when tested in accordance with ASHRAE standard 193
- 3 kW – 25 kW electric heater kits
- AHRI certified
- ETL listed

CABINET FEATURES:

- Rigid SmartFrame cabinet
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Heat Pump System,5.0 Ton, Outdoor Unit-GSZH506010A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208509802 Products [GSZH506010A* , AMST60DU1400A* ,], SEER2 15.2 , EER2 12.0 , HSPF2 7.8

INDOOR AIR HANDLER UNIT DETAILS : AMST60DU1400

Quantity:	1	Configuration:	Multi-positional
Power Supply (V/Hz/Ph):	208/240/50/60/1	Suction Connection Size (in):	7/8
Min. Circuit Amps MCA (A):	8.6	Liquid Connection Size (in):	3/4
Max Overcurrent Protection (MOP) (A):	15	Condensate Connection (in):	3/4
Net Weight (lb):	167	Dimensions (HxWxD) (in):	58 x 24 x 21
Gross Weight (lb):	166	Power Voltage (lb):	208/240
Current Type :	-	Power Phase:	1
Power Frequency :	50/60	Min Voltage :	208
Max Voltage :	240	MCA :	8.6
MOP :	15	Electric Heat Range :	-
Indoor Blower FLA :	-	Fan Motor Output :	-

The Electrical data shown here in submittal is for Air Handler only with no heat added. When adding Heat Kit please refer to Heat Kit Spec Sheet for electrical requirements



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.




Submittal Data Sheet

15.2 SEER2, Heat Pump System, 5.0 Ton, Outdoor Unit-GSZH506010A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208509802 Products [GSZH506010A* , AMST60DU1400A* ,], SEER2 15.2 , EER2 12.0 , HSPF2 7.8

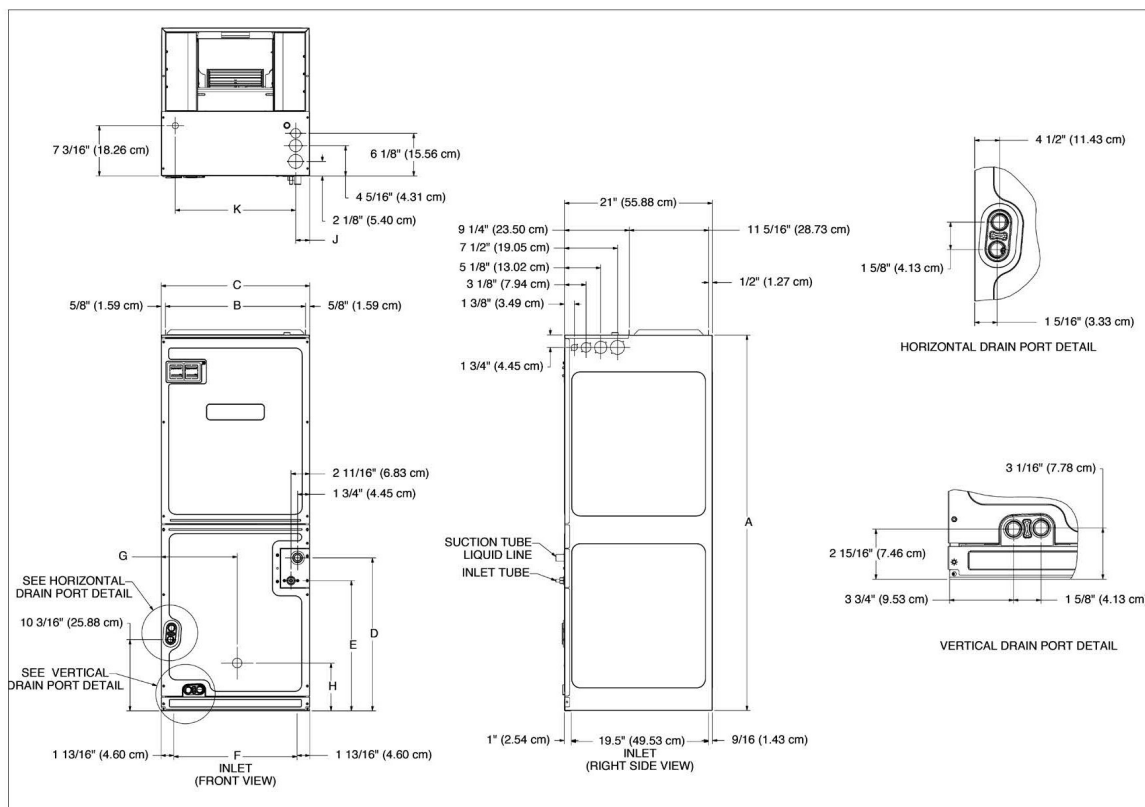

MODEL	A"	B"	C"	D"	E"	F"	G"	H"	J"	K"
AMST24BU*	45	16 ⁵ / ₁₆	17 ⁹ / ₁₆	15 ¹ / ₄	12	12 ¹ / ₂	9	12 ⁹ / ₁₆	2	13 ³ / ₈
AMST30BU*	53 ⁷ / ₁₆	16 ⁵ / ₁₆	17 ⁹ / ₁₆	23 ¹¹ / ₁₆	20 ³ / ₁₆	12 ¹ / ₂	9	12 ³ / ₄	2	13 ³ / ₈
AMST36BU*	53 ⁷ / ₁₆	16 ⁵ / ₁₆	17 ⁹ / ₁₆	23 ¹¹ / ₁₆	20 ³ / ₁₆	12 ¹ / ₂	9	12 ³ / ₄	2	13 ³ / ₈
AMST36CU*	49	19 ¹³ / ₁₆	21 ¹ / ₈	21 ¹² / ₁₆	17 ¹ / ₄	16 ¹ / ₁₆	9	12 ³ / ₄	2	17 ¹ / ₈
AMST42CU*	53 ⁷ / ₁₆	19 ¹³ / ₁₆	21 ¹ / ₈	21 ¹² / ₁₆	18 ¹ / ₂	16 ¹⁰ / ₁₆	9	12 ³ / ₄	2	17 ¹ / ₈
AMST48CU*	58	19 ¹³ / ₁₆	21 ¹ / ₈	26 ³ / ₁₆	22 ¹⁵ / ₁₆	14 ¹⁰ / ₁₆	10 ¹³ / ₁₆	6 ¹³ / ₁₆	2	17 ¹ / ₈
AMST48DU*	53 ⁷ / ₁₆	23 ¹ / ₄	24 ¹ / ₈	21 ¹ / ₁₆	18 ¹ / ₄	17 ¹¹ / ₁₆	12 ⁹ / ₁₆	6 ¹⁵ / ₁₆	2	20 ³ / ₈
AMST06DU*	58	23 ¹ / ₄	24 ¹ / ₈	26	22 3/4	17 ¹¹ / ₁₆	12 ⁹ / ₁₆	13 ¹³ / ₁₆	2	20 ³ / ₈