




Scan to see a full specifications, installation and agency certification information.

APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

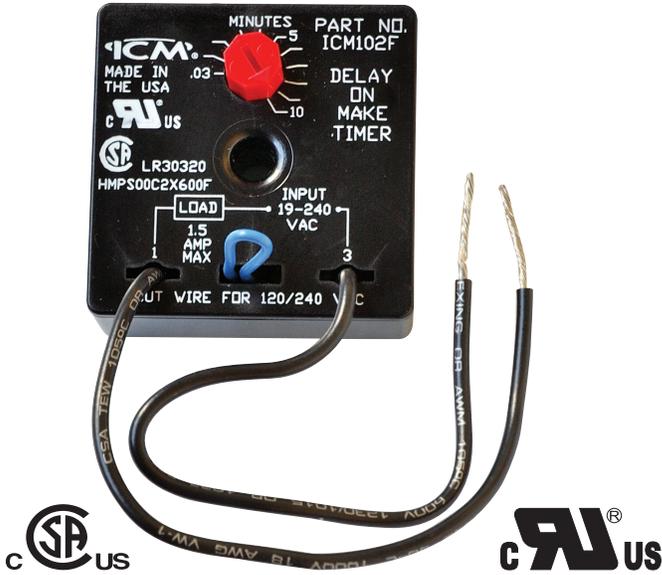

REPLACES

- Supco: TD69W
- Wagner/DiversiTech: ADM-2

FEATURES

- ✓ Universal voltage operation
- ✓ Higher 1.5 amp power rating
- ✓ Knob-adjustable time delays
- ✓ Works with anticipator-type thermostats
- ✓ One model replaces many in field
- ✓ Ideal for compressor staging
- ✓ Simple 2-wire hookup
- ✓ "F" suffix denotes 6" wire leads

OVERVIEW

When power is applied to the input, the time delay begins. After the time delay is complete, the load energizes.

SPECIFICATIONS

- **Voltage:** 18-240 VAC, 1.5 amps, 15 amp inrush, 40 mA holding current
- **Frequency:** 50/60 Hz
- **Adjustable delay:** .03-10 minutes (1.8-600 seconds)
- **Voltage drop:** 2.5 V @ 1.5 amps

Content and specifications on sell sheets subject to change without notice.