

Submittal Data Sheet

DACA-CFS1

Electronic Condensate Overflow Switch

Designed for Daikin Ductless Mini-splits

Project Information:

Job Name:

Location:

Engineer:

Submitted to:

For: ☐ Reference ☐ Approval ☐ Construction

Submitted by:

Reference:

Submittal Information:

Approval:

Date:

Construction:

Unit #:

Drawing #:

(Sec. I) Ordering Information:

Product Code - DACA-CFS1

Model - DACA-CFS1

Carton Qty - 12

Carton Weight - 4 lbs.

(Sec. II) Product Specifications:

CPU Length – 2.5"

CPU Width – 1.4"

CPU Height – 1"

Power Supply – 15 to 250 Volts AC/DC

Switching Capacity – 0 to 250 Volts AC, 5A, 1250VA; 0 to 100 Volts DC, 5A, 150W

Contact – NC/NO

Probe Cable Length – 4'

Lead Cable Length – 2'


Power Consumption – 0.5 Watt

(Sec. III) Carton Contents:

(Fig. I) Product Image:



(Fig. II) Part List:

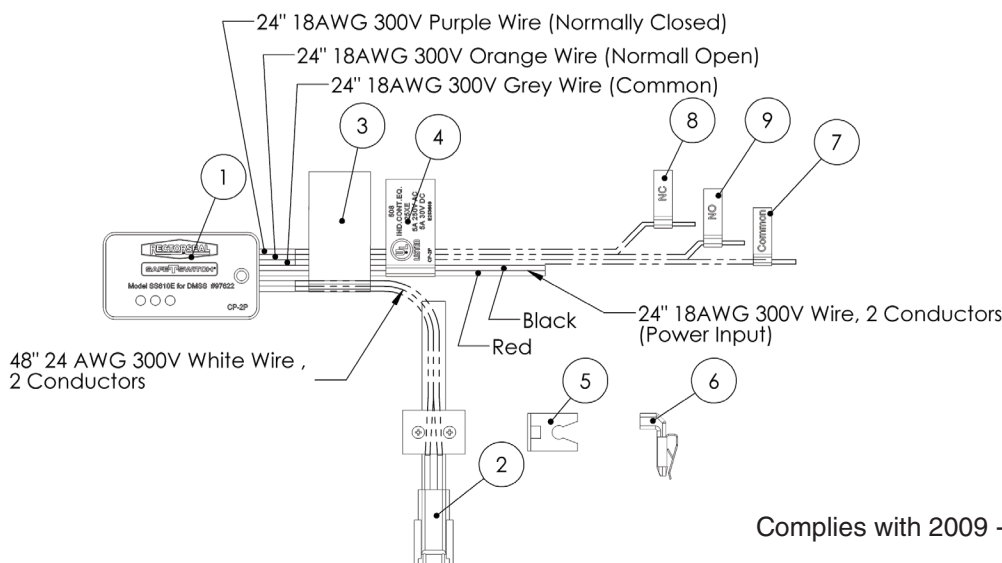

- 1.) CP-2P
- 2.) SE-4 Probe with DK-6P bracket
- 3.) Reset instruction tag
- 4.) UL tag, CP-2P
- 5.) Part 1 for 5mm tube BK-6P
- 6.) BK-5P Bracket
- 7.) Tag, Common
- 8.) Tag, Normally Closed
- 9.) Tag, Normally Open

Complies with 2009 - 2012 IMC & IRC

(RectorSeal's products are subject to continuous improvements; RectorSeal reserves the right to modify product design, specifications & information in this data sheet without notice and without incurring any obligations)