


Outdoor Thermostat

iO-ODT

The iO-ODT is used for control of a high or low balance point setting in heat pump or dual fuel applications. This bi-metal thermostat can be easily mounted inside of a heat pump for balance point control.

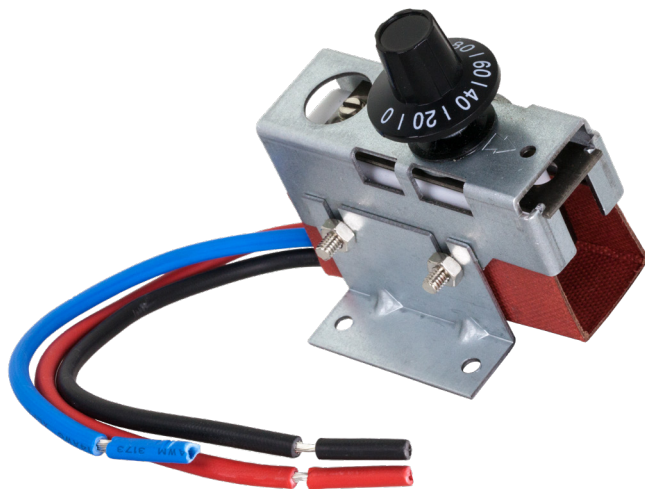

Warranty: 1 year

Specifications:

Dimensions	2.63" Height x 1.5" Width x 2.5" Depth
Amp Rating	22 amps, resistive maximum
Input Voltage	120 - 277VAC
Control Range	0° F to 90° F
HP Ratings	.75 HP @ 125VAC; 1.5 HP @ 250 - 277VAC
Connections	6" Wire Leads Red - Common Black - Make on fall below setpoint Blue - Make on rise above setpoint