

## PACKAGED HEAT PUMPS 15.2 SEER2 2 TO 5 TONS



### Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data .....	4
Expanded Heating Data.....	22
Airflow Data .....	25
Heat Kit Electrical Data.....	26
Dimensions .....	27
Wiring Diagrams .....	28
Accessories .....	30

### Standard Features

- High-efficiency scroll compressor
- Multi-speed ECM indoor blower motor
- Copper tube/aluminum fin condenser coil
- All-aluminum evaporator coil
- Totally enclosed, permanently lubricated condenser fan motor
- Fully charged system
- Quiet horizontal discharge
- Electric heat kit available as a field-installed option
- AHRI Certified; ETL Listed

### Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive Architectural Gray powder-paint finish
- Louvered condenser coil protection
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated blower compartment with convenient access panels
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- One footprint for all tonnages
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



\* Complete warranty details available from your local dealer or at [www.amana-hac.com](http://www.amana-hac.com). To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. The duration of warranty coverages in Texas differs in some cases.

	<b>G</b>	<b>P</b>	<b>H</b>	<b>H</b>	<b>5</b>	<b>24</b>	<b>4</b>	<b>1</b>	<b>A</b>	<b>A</b>	
	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6,7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	
<b>Brand</b>										<b>Minor Revision</b>	
G Goodman® Brand										A	
<b>Product Category</b>										<b>Major Revision</b>	
P Packaged Unit										A	
<b>Unit Type</b>										<b>Electrical</b>	
C Air Conditioner										1 208/230 V, 1 Phase, 60 Hz	
H Heat Pump										<b>Refrigerant</b>	
										4 R-410A	
<b>Air Flow</b>										<b>Nominal Capacity</b>	
H Horizontal										24 2 Tons	42 3½ Tons
M Multi-Position										30 2½ tons	48 4 Tons
										36 3 Tons	60 5 Tons
										<b>Efficiency</b>	
										3 13.4 SEER2	
										5 15.2 SEER2	

	GPHH52441**	GPHH52441**	GPHH53641**	GPHH54241**	GPHH54841**	GPHH56041**
<b>COOLING CAPACITY</b>						
Total BTU/h	24,000	27,600	34,800	42,000	46,000	57,250
Sensible BTU/h	18,288	22,411	27,179	31,458	35,788	41,564
SEER2 / EER2	15.0 / 11.4	15.2 / 11.4	15.2 / 11.4	15.2 / 11.4	15.2 / 11.2	15.2 / 11.4
AHRI Numbers	208842422	208842423	208842424	208842425	208842426	208842427
<b>HEATING CAPACITY</b>						
BTU/h (47°F)	22,800	27,600	32,200	40,000	44,000	54,500
C.O.P. (47°F)	3.73	3.26	3.74	3.54	3.55	3.60
BTU/h (17°F)	13,000	14,800	18,300	21,600	26,000	33,200
C.O.P. (17°F)	2.48	2.32	2.34	2.29	2.30	2.40
HSPF2	6.70	6.70	6.70	6.70	6.70	7.00
<b>EVAPORATOR MOTOR</b>						
Type	ECM	ECM	ECM	ECM	ECM	ECM
Wheel (D x W)	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 8"	11" x 8"
Cooling CFM <sup>3</sup>	875	1,050	1,200	1,300	1,600	1,700
Fan-Only CFM	800	950	1,100	1,200	1,400	1,600
No. of Speeds	5	5	5	5	5	Variable
Horsepower - RPM	½ - 1,050	½ - 1,050	½ - 1,050	¾ - 1,050	¾ - 1,050	¾ - 1,050
<b>EVAPORATOR COIL</b>						
Face Area (ft <sup>2</sup> )	5.26	5.26	6.23	6.23	6.23	7.01
Rows Deep	4	4	4	4	4	4
Fins per Inch	14	14	14	14	14	14
Metering Device Type	TXV	TXV	TXV	TXV	TXV	TXV
Drain Size (NPT)	¾" - 14 NPT	¾" - 14 NPT	¾" - 14 NPT	¾" - 14 NPT	¾" - 14 NPT	¾" - 14 NPT
Refrigerant Charge (oz.)	116	116	170	170	170	175
<b>CONDENSER FAN</b>						
Horsepower - RPM	1/6 - 810	1/6 - 810	1/6 - 810	1/4 - 1075	1/4 - 1075	1/4 - 1075
Fan Diameter	22	22	22	22	22	22
# of Fan Blades	3	3	4	4	4	4
<b>CONDENSER COIL</b>						
Face Area (ft <sup>2</sup> )	14.4	13.92	13.92	16.5	16.5	18.85
Rows Deep	2	2	2	2	2	2
Fins per Inch	16	16	16	16	16	20
Metering Device Type	Piston	Piston	Piston	TXV	TXV	TXV
<b>COMPRESSOR</b>						
Quantity	1	1	1	1	1	1
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
Stage	Single	Single	Single	Two	Two	Two
<b>SOUND POWER</b>						
dBA	76	76	78	79	80	80
<b>ELECTRICAL DATA</b>						
Compressor RLA/LRA	12.8 / 58.3	14.1 / 67.9	15.7 / 72.2	19.9/150.7	21.2 / 104.0	25.6 / 151.0
Voltage/Phase (60 Hz)	208-230 / 1	208-230 / 1	208-230 / 1	208-230 / 1	208-230 / 1	208-230 / 1
Indoor Blower FLA	4.3	4.3	4.3	4.3	5.4	6.8
Outdoor Fan FLA	0.95	0.95	1.3	1.4	1.4	1.4
M.C.A. <sup>1</sup>	21.3	22.9	23.2	30.6	34.7	40.2
M.O.P. <sup>2</sup>	30	35	35	50	50	60
<b>OPERATING WEIGHTS (LBS)</b>	315	315	375	375	405	405
<b>SHIPPING WEIGHTS (LBS)</b>	324	324	385	385	415	415

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

<sup>3</sup> Factory

Always check the S&R plate for electrical data on the unit being installed.

75	700	MBh	24.3	24.6	25.3	26.5	24.0	24.4	25.1	26.2	23.4	23.8	24.5	25.6	22.3	22.7	23.4	24.5	21.0	21.3	22.0	23.2	19.7	20.1	20.8	21.9
		S/T	0.69	0.61	0.47	0.3	0.69	0.62	0.48	0.3	1.00	0.64	0.51	0.4	1.00	0.66	0.52	0.4	1.00	0.68	0.55	0.4	1.00	0.73	0.60	0.5
		ΔT	21.15	19.58	16.64	13.6	21.11	19.53	16.60	13.6	21.33	19.76	16.82	13.8	21.09	19.52	16.58	13.5	20.88	19.31	16.37	13.3	21.87	20.29	17.36	14.3
		kW	1.51	1.50	1.50	1.5	1.70	1.70	1.69	1.7	1.91	1.91	1.91	1.9	2.15	2.15	2.14	2.2	2.41	2.41	2.40	2.4	2.71	2.71	2.71	2.7
		Amps	6.00	6.00	5.98	6.0	6.89	6.88	6.86	6.9	7.87	7.86	7.85	7.9	8.94	8.93	8.92	9.0	10.13	10.12	10.11	10.2	11.53	11.52	11.50	11.6
	Hi PR	242	243	245	249.4	281	282	284	287.8	321	322	324	328.1	364	365	367	371.4	411	412	414	418.1	461	462	464	468.0	
	Lo PR	121	123	126	131.2	129	130	133	138.6	135	137	140	145.1	141	142	145	150.6	146	148	151	156.1	153	155	158	162.8	
	800	MBh	24.5	24.9	25.6	26.7	24.3	24.7	25.4	26.5	23.7	24.0	24.7	25.9	22.6	22.9	23.6	24.8	21.2	21.6	22.3	23.4	20.0	20.4	21.1	22.2
		S/T	0.76	0.68	0.55	0.4	0.77	0.69	0.55	0.4	1.00	0.71	0.58	0.4	1.00	0.73	0.60	0.5	1.00	0.76	0.62	0.5	1.00	1.00	0.67	0.5
		ΔT	20.15	18.58	15.64	12.6	20.11	18.53	15.60	12.6	20.33	18.76	15.82	12.8	20.09	18.52	15.58	12.5	19.88	18.31	15.37	12.3	20.87	19.29	16.36	13.3
kW		1.52	1.52	1.51	1.5	1.71	1.71	1.70	1.7	1.92	1.92	1.92	1.9	2.16	2.16	2.15	2.2	2.42	2.42	2.41	2.4	2.72	2.72	2.72	2.7	
Amps		6.05	6.05	6.03	6.1	6.94	6.93	6.91	7.0	7.92	7.91	7.90	8.0	8.99	8.98	8.96	9.0	10.18	10.17	10.15	10.2	11.57	11.57	11.55	11.6	
875	Hi PR	244	245	247	251.4	283	284	286	289.8	323	324	326	330.1	366	367	369	373.4	413	414	416	420.1	463	464	466	470.0	
	Lo PR	123	124	128	132.8	130	132	135	140.2	137	138	142	146.7	142	144	147	152.2	148	149	152	157.6	155	156	159	164.4	
	MBh	24.8	25.1	25.8	26.9	24.5	24.9	25.6	26.7	23.9	24.2	25.0	26.1	22.8	23.1	23.9	25.0	21.5	21.8	22.5	23.6	20.2	20.6	21.3	22.4	
	S/T	0.80	0.72	0.59	0.4	0.80	0.73	0.59	0.4	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	1.00	0.71	0.6	
	ΔT	19.52	17.95	15.01	12.0	19.48	17.90	14.97	11.9	19.70	18.12	15.19	12.1	19.46	17.89	14.95	11.9	19.25	17.68	14.74	11.7	20.24	18.66	15.72	12.7	
875	kW	1.52	1.52	1.52	1.5	1.72	1.71	1.71	1.7	1.93	1.93	1.93	1.9	2.16	2.16	2.16	2.2	2.42	2.42	2.42	2.4	2.73	2.73	2.72	2.7	
	Amps	6.08	6.08	6.06	6.1	6.97	6.96	6.94	7.0	7.95	7.94	7.93	8.0	9.02	9.01	8.99	9.1	10.21	10.20	10.19	10.3	11.60	11.60	11.58	11.6	
	Hi PR	246	247	249	252.8	284	285	287	291.2	324	326	327	331.5	368	369	371	374.8	415	416	417	421.5	464	465	467	471.4	
	Lo PR	124	126	129	134.0	132	133	136	141.4	138	140	143	148.0	144	145	148	153.5	149	151	154	158.9	156	157	160	165.7	

DB = Entering Indoor Dry Bulb Temperature	Shaded area reflects AHRI (TVA) conditions.	KW = Total system power
High and low pressures are measured at the liquid and suction access fittings.		Amps: Unit amps (comp. + evaporator + condenser fan motors)
Design Subcooling: 5-7 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat: 15-18°F @ the compressor suction access fitting connection.		

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE															115														
				65					75					85					95					105									
				ENTERING INDOOR WET BULB TEMPERATURE																													
700	MBh	24.4	24.7	25.5	26.6	24.2	24.5	25.2	26.4	23.5	23.9	24.6	25.7	22.4	22.8	23.5	24.6	21.1	21.4	22.2	23.3	19.9	20.2	20.9	22.1								
	S/T	0.81	0.74	0.60	0.5	1.00	0.74	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.72	0.6								
	ΔT	24.63	23.06	20.12	17.1	24.59	23.02	20.08	17.0	24.81	23.24	20.30	17.3	24.57	23.00	20.06	17.0	24.36	22.79	19.85	16.8	25.35	23.78	20.84	17.8								
	kW	1.51	1.51	1.50	1.5	1.70	1.70	1.69	1.7	1.92	1.91	1.91	1.9	2.15	2.15	2.14	2.2	2.41	2.41	2.40	2.4	2.71	2.71	2.71	2.7								
	Amps	6.01	6.00	5.99	6.1	6.89	6.88	6.87	6.9	7.88	7.87	7.85	7.9	8.94	8.94	8.92	9.0	10.13	10.13	10.11	10.2	11.53	11.52	11.51	11.6								
	Hi PR	243	244	246	249.8	281	282	284	288.3	321	323	324	328.5	365	366	368	371.8	412	413	414	418.6	461	462	464	468.5								
800	Lo PR	122	123	127	131.7	129	131	134	139.2	136	137	140	145.7	141	143	146	151.2	147	148	151	156.6	154	155	158	163.4								
	MBh	24.7	25.0	25.7	26.8	24.4	24.8	25.5	26.6	23.8	24.1	24.9	26.0	22.7	23.0	23.8	24.9	21.4	21.7	22.4	23.5	20.1	20.5	21.2	22.3								
	S/T	1.00	0.81	0.67	0.5	1.00	0.82	0.68	0.5	1.00	0.84	0.70	0.6	1.00	0.86	0.72	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.80	0.7								
	ΔT	23.63	22.06	19.12	16.1	23.59	22.02	19.08	16.0	23.81	22.24	19.30	16.3	23.57	22.00	19.06	16.0	23.36	21.79	18.85	15.8	24.35	22.78	19.84	16.8								
	kW	1.52	1.52	1.51	1.5	1.71	1.71	1.71	1.7	1.93	1.92	1.92	1.9	2.16	2.16	2.15	2.2	2.42	2.42	2.41	2.4	2.72	2.72	2.72	2.7								
	Amps	6.06	6.05	6.04	6.1	6.94	6.93	6.92	7.0	7.92	7.92	7.90	8.0	8.99	8.98	8.97	9.0	10.18	10.17	10.16	10.2	11.58	11.57	11.56	11.6								
875	Hi PR	245	246	248	251.8	283	284	286	290.3	323	325	326	330.5	367	368	370	373.9	414	415	416	420.6	463	464	466	470.5								
	Lo PR	123	125	128	133.3	131	132	136	140.7	137	139	142	147.3	143	144	148	152.8	148	150	153	158.2	155	157	160	165.0								
	MBh	24.9	25.2	26.0	27.1	24.7	25.0	25.7	26.8	24.0	24.4	25.1	26.2	22.9	23.3	24.0	25.1	21.6	21.9	22.7	23.8	20.4	20.7	21.4	22.5								
	S/T	1.00	0.85	0.71	0.6	1.00	0.85	0.72	0.6	1.00	0.88	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.84	0.7								
	ΔT	23.00	21.43	18.49	15.4	22.96	21.39	18.45	15.4	23.18	21.61	18.67	15.6	22.94	21.37	18.43	15.4	22.73	21.16	18.22	15.2	23.72	22.14	19.21	16.2								
	kW	1.52	1.52	1.52	1.5	1.72	1.72	1.71	1.7	1.93	1.93	1.93	1.9	2.17	2.16	2.16	2.2	2.43	2.42	2.42	2.4	2.73	2.73	2.73	2.7								
80	Amps	6.09	6.08	6.07	6.1	6.97	6.96	6.95	7.0	7.96	7.95	7.93	8.0	9.02	9.01	9.00	9.1	10.21	10.20	10.19	10.3	11.61	11.60	11.59	11.7								
	Hi PR	246	247	249	253.2	285	286	287	291.7	325	326	328	331.9	368	369	371	375.3	415	416	418	422.0	465	466	468	471.9								
	Lo PR	125	126	129	134.5	132	134	137	142.0	139	140	143	148.5	144	146	149	154.0	150	151	154	159.4	156	158	161	166.2								
	MBh	25.1	25.4	26.1	27.3	24.8	25.2	25.9	27.0	24.2	24.6	25.3	26.4	23.1	23.5	24.2	25.3	21.7	22.0	22.7	23.9	20.7	21.0	21.7	22.8								
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.6	1.00	0.94	0.80	0.7	1.00	0.96	0.82	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.82	0.7								
	ΔT	26.72	25.15	22.21	19.2	26.68	25.11	22.17	19.1	26.90	25.33	22.39	19.3	26.66	25.09	22.15	19.1	26.45	24.88	21.94	18.9	27.44	25.86	22.93	19.9								

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
70	875	MBh	0.0	28.4	29.2	-	27.7	28.1	29.0	-	27.0	27.4	28.2	-	25.7	26.1	27.0	-	24.2	24.6	25.4	-	22.8	23.2	24.0	-											
		S/T	0.62	0.54	0.39	-	0.63	0.54	0.40	-	0.65	0.57	0.43	-	1.00	0.59	0.45	-	1.00	0.62	0.47	-	1.00	0.67	0.53	-											
		ΔT	18.23	16.58	13.50	-	18.19	16.54	13.46	-	18.42	16.77	13.69	-	18.17	16.52	13.44	-	17.95	16.30	13.22	-	18.98	17.33	14.25	-											
		kW	1.74	1.73	1.73	-	1.96	1.96	1.95	-	2.21	2.20	2.20	-	2.47	2.47	2.47	-	2.77	2.77	2.77	-	3.13	3.12	3.12	-											
		Amps	6.84	6.83	6.81	-	7.86	7.85	7.83	-	8.99	8.98	8.97	-	10.22	10.21	10.20	-	11.59	11.59	11.57	-	13.21	13.20	13.18	-											
		Hi PR	249	251	252	-	289	290	292	-	330	331	333	-	375	376	378	-	423	424	426	-	474	475	477	-											
		Lo PR	124	126	129	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	155	-	157	158	161	-											
70	1050	MBh	28.4	28.8	29.7	-	28.2	28.6	29.4	-	27.5	27.9	28.7	-	26.2	26.6	27.4	-	24.7	25.1	25.9	-	23.3	23.6	24.5	-											
		S/T	0.71	0.63	0.49	-	0.72	0.64	0.49	-	0.75	0.66	0.52	-	1.00	0.69	0.54	-	1.00	0.71	0.56	-	1.00	0.76	0.62	-											
		ΔT	16.85	15.20	12.12	-	16.81	15.16	12.07	-	17.04	15.39	12.31	-	16.79	15.14	12.06	-	16.57	14.92	11.84	-	17.60	15.95	12.87	-											
		kW	1.75	1.75	1.75	-	1.97	1.97	1.97	-	2.22	2.22	2.22	-	2.49	2.49	2.48	-	2.79	2.79	2.78	-	3.14	3.14	3.14	-											
		Amps	6.91	6.90	6.89	-	7.93	7.92	7.90	-	9.06	9.06	9.04	-	10.29	10.29	10.27	-	11.67	11.66	11.64	-	13.28	13.27	13.25	-											
		Hi PR	252	253	255	-	292	293	295	-	333	334	336	-	378	379	381	-	426	427	429	-	477	478	480	-											
		Lo PR	127	128	132	-	134	136	139	-	141	143	146	-	147	148	151	-	152	154	157	-	159	161	164	-											
1125	1125	MBh	28.7	29.1	29.9	-	28.4	28.8	29.7	-	27.7	28.1	28.9	-	26.4	26.8	27.7	-	24.9	25.3	26.1	-	23.5	23.9	24.7	-											
		S/T	0.74	0.65	0.51	-	0.74	0.66	0.52	-	0.77	0.69	0.54	-	1.00	0.71	0.56	-	1.00	0.73	0.59	-	1.00	0.79	0.64	-											
		ΔT	16.36	14.71	11.63	-	16.31	14.66	11.58	-	16.55	14.89	11.81	-	16.30	14.65	11.56	-	16.08	14.42	11.34	-	17.11	15.46	12.38	-											
		kW	1.76	1.76	1.75	-	1.98	1.98	1.97	-	2.23	2.23	2.22	-	2.50	2.49	2.49	-	2.80	2.79	2.79	-	3.15	3.15	3.14	-											
		Amps	6.94	6.93	6.91	-	7.95	7.95	7.93	-	9.09	9.08	9.07	-	10.32	10.31	10.29	-	11.69	11.69	11.67	-	13.30	13.30	13.28	-											
		Hi PR	254	255	256	-	293	294	296	-	334	335	337	-	379	380	382	-	427	428	430	-	478	479	481	-											
		Lo PR	128	130	133	-	136	137	140	-	142	144	147	-	148	149	153	-	153	155	158	-	160	162	165	-											

75	875	MBh	28.0	28.4	29.2	30.5	27.7	28.1	29.0	30.3	27.0	27.4	28.2	29.5	25.7	26.1	27.0	28.3	24.2	24.6	25.4	26.7	22.8	23.2	24.0	25.3
		S/T	0.76	0.68	0.53	0.4	0.76	0.68	0.54	0.4	1.00	0.71	0.56	0.4	1.00	0.73	0.59	0.4	1.00	0.75	0.61	0.5	1.00	1.00	0.66	0.5
		ΔT	21.86	20.21	17.13	13.9	21.82	20.17	17.08	13.9	22.05	20.40	17.32	14.1	21.80	20.15	17.07	13.9	21.58	19.93	16.85	13.7	22.61	20.96	17.88	14.7
		kW	1.73	1.73	1.73	1.7	1.96	1.95	1.95	2.0	2.20	2.20	2.20	2.2	2.47	2.47	2.47	2.5	2.77	2.77	2.77	2.8	3.12	3.12	3.12	3.1
		Amps	6.83	6.82	6.81	6.9	7.85	7.84	7.82	7.9	8.98	8.98	8.96	9.0	10.21	10.21	10.19	10.3	11.59	11.58	11.56	11.6	13.20	13.19	13.17	13.3
	Hi PR	250	251	253	256.9	289	290	292	296.4	331	332	333	337.8	375	376	378	382.3	423	424	426	430.3	474	475	477	481.6	
	Lo PR	124	126	129	134.5	132	134	137	142.1	139	140	143	148.8	144	146	149	154.4	150	151	155	159.9	157	158	162	166.9	
	1050	MBh	28.5	28.9	29.7	31.0	28.2	28.6	29.4	30.7	27.5	27.9	28.7	30.0	26.2	26.6	27.5	28.7	24.7	25.1	25.9	27.2	23.3	23.7	24.5	25.8
		S/T	0.85	0.77	0.62	0.5	1.00	0.78	0.63	0.5	1.00	0.80	0.66	0.5	1.00	0.82	0.68	0.5	1.00	0.85	0.70	0.5	1.00	1.00	0.76	0.6
		ΔT	20.48	18.83	15.75	12.6	20.44	18.79	15.70	12.5	20.67	19.02	15.94	12.7	20.42	18.77	15.69	12.5	20.20	18.55	15.47	12.3	21.23	19.58	16.50	13.3
kW		1.75	1.75	1.74	1.8	1.97	1.97	1.97	2.0	2.22	2.22	2.21	2.2	2.49	2.49	2.48	2.5	2.79	2.79	2.78	2.8	3.14	3.14	3.14	3.2	
Amps		6.90	6.90	6.88	7.0	7.92	7.91	7.90	8.0	9.06	9.05	9.03	9.1	10.29	10.28	10.26	10.3	11.66	11.65	11.64	11.7	13.27	13.26	13.25	13.3	
1125	Hi PR	253	254	255	259.8	292	293	295	299.3	333	335	336	340.6	378	379	381	385.2	426	427	429	433.2	477	478	480	484.5	
	Lo PR	127	128	132	136.9	134	136	139	144.5	141	143	146	151.2	147	148	152	156.8	152	154	157	162.4	159	161	164	169.3	
	MBh	28.7	29.1	29.9	31.2	28.5	28.9	29.7	31.0	27.7	28.1	29.0	30.2	26.5	26.9	27.7	29.0	24.9	25.3	26.2	27.4	23.5	23.9	24.7	26.0	
	S/T	0.87	0.79	0.65	0.5	1.00	0.80	0.65	0.5	1.00	0.83	0.68	0.5	1.00	0.85	0.70	0.5	1.00	1.00	0.73	0.6	1.00	1.00	0.78	0.6	
	ΔT	19.99	18.34	15.25	12.1	19.94	18.29	15.21	12.0	20.17	18.52	15.44	12.2	19.93	18.27	15.19	12.0	19.71	18.05	14.97	11.8	20.74	19.09	16.01	12.8	
1125	kW	1.76	1.75	1.75	1.8	1.98	1.98	1.97	2.0	2.23	2.22	2.22	2.2	2.49	2.49	2.49	2.5	2.79	2.79	2.79	2.8	3.15	3.14	3.14	3.2	
	Amps	6.93	6.92	6.91	7.0	7.95	7.94	7.92	8.0	9.08	9.08	9.06	9.1	10.31	10.31	10.29	10.4	11.69	11.68	11.66	11.7	13.30	13.29	13.27	13.4	
	Hi PR	254	255	257	261.0	293	294	296	300.4	335	336	337	341.8	379	380	382	386.4	427	428	430	434.4	478	480	481	485.6	
	Lo PR	128	130	133	138.1	136	137	140	145.7	142	144	147	152.3	148	149	153	158.0	153	155	158	163.5	160	162	165	170.4	

DB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Design Subcooling, 5-7 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15-18°F @ the compressor suction access fitting connection.

Shaded area reflects AHRI (TVA) conditions.

KW = Total system power  
 Amps: Unit amps (comp. + evaporator + condenser fan motors)

		Outdoor Ambient Temperature																		115°F																	
		65°F						75°F						85°F						95°F						105°F											
		Entering Indoor Wet Bulb Temperature																																			
IDB	Airflow	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127
80	Mbh	28.1	28.5	29.4	30.6	31.1	31.6	32.1	32.6	33.1	33.6	34.1	34.6	35.1	35.6	36.1	36.6	37.1	37.6	24.3	24.7	25.6	26.9	22.9	23.3	24.2	25.5										
	S/T	1.00	0.81	0.67	0.5	0.4	0.3	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.00	1.00	0.74	0.6	1.00	1.00	0.80	0.6										
	ΔT	25.52	23.87	20.78	17.6	15.4	13.2	11.0	8.8	6.6	4.4	2.2	0.0	-2.2	-4.4	-6.6	-8.8	-11.0	-13.2	25.23	23.58	20.50	17.3	26.27	24.62	21.54	18.3										
	kW	1.73	1.73	1.73	1.7	1.6	1.5	1.4	1.3	1.2	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	0.3	2.77	2.77	2.77	2.8	3.13	3.12	3.12	3.1										
	Amps	6.84	6.83	6.81	6.9	7.0	7.1	7.2	7.3	7.4	7.5	7.6	7.7	7.8	7.9	8.0	8.1	8.2	8.3	11.59	11.58	11.57	11.6	13.20	13.20	13.18	13.3										
	Hi PR	250	251	253	257.4	260.2	263.0	265.8	268.6	271.4	274.2	277.0	279.8	282.6	285.4	288.2	291.0	293.8	296.6	424	425	426	430.8	475	476	478	482.0										
	Lo PR	125	127	130	135.1	137.5	140.0	142.5	145.0	147.5	150.0	152.5	155.0	157.5	160.0	162.5	165.0	167.5	170.0	150	152	155	160.5	157	159	162	167.4										
	Mbh	28.6	29.0	29.8	31.1	31.6	32.1	32.6	33.1	33.6	34.1	34.6	35.1	35.6	36.1	36.6	37.1	37.6	38.1	24.8	25.2	26.1	27.3	23.4	23.8	24.7	25.9										
	S/T	1.00	0.90	0.76	0.6	0.5	0.4	0.3	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.00	1.00	0.84	0.7	1.00	1.00	0.89	0.7										
	ΔT	24.14	22.49	19.40	16.2	14.0	11.8	9.6	7.4	5.2	3.0	0.8	-1.4	-3.6	-5.8	-8.0	-10.2	-12.4	-14.6	23.85	22.20	19.12	15.9	24.89	23.24	20.15	17.0										
1050	kW	1.75	1.75	1.75	1.8	1.7	1.6	1.5	1.4	1.3	1.2	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	2.79	2.79	2.78	2.8	3.14	3.14	3.14	3.2										
	Amps	6.91	6.90	6.88	7.0	7.3	7.92	7.90	8.0	9.06	9.06	9.04	9.1	10.29	10.28	10.27	10.3	11.67	11.66	11.64	11.7	13.28	13.27	13.25	13.3												
	Hi PR	253	254	256	260.2	293	294	295	299.7	334	335	337	341.1	378	380	381	385.6	426	428	429	433.7	478	479	481	484.9												
	Lo PR	127	129	132	137.5	135	137	140	145.1	142	143	146	151.7	147	149	152	157.4	153	154	158	162.9	160	161	165	169.8												
	Mbh	28.9	29.3	30.1	31.4	31.4	28.6	29.0	29.8	31.1	27.9	28.3	29.1	30.4	26.6	27.0	27.8	29.1	25.1	25.5	26.3	27.6	23.7	24.1	24.9	26.2											
	S/T	1.00	0.93	0.78	0.6	0.6	1.00	0.93	0.79	0.6	1.00	0.96	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.91	0.8											
	ΔT	23.64	21.99	18.91	15.7	23.60	21.95	18.86	15.7	23.83	22.18	19.10	15.9	23.58	21.93	18.85	15.7	23.36	21.71	18.63	15.4	24.39	22.74	19.66	16.5												
	kW	1.76	1.75	1.75	1.8	1.98	1.98	1.97	2.0	2.23	2.23	2.22	2.2	2.50	2.49	2.49	2.5	2.80	2.79	2.79	2.8	3.15	3.15	3.14	3.2												
	Amps	6.94	6.93	6.91	7.0	7.95	7.95	7.93	8.0	9.09	9.08	9.06	9.1	10.32	10.31	10.29	10.4	11.69	11.68	11.67	11.7	13.30	13.30	13.28	13.4												
	Hi PR	254	255	257	261.4	294	295	297	300.9	335	336	338	342.3	380	381	382	386.8	428	429	430	434.8	479	480	482	486.1												
Lo PR	129	130	133	138.6	136	138	141	146.2	143	144	148	152.9	148	150	153	158.5	154	156	159	164.0	161	162	166	171.0													

875	MBh	28.6	29.0	29.8	31.1	28.4	28.8	29.6	30.9	27.6	28.0	28.9	30.1	26.4	26.8	27.6	28.9	24.8	25.2	26.1	27.3	23.4	23.8	24.6	25.9
	S/T	1.00	0.92	0.77	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.8
	ΔT	28.76	27.11	24.03	20.8	28.71	27.06	23.98	20.8	28.95	27.29	24.21	21.0	28.70	27.05	23.96	20.8	28.48	26.82	23.74	20.5	29.51	27.86	24.78	21.6
	kW	1.74	1.74	1.73	1.8	1.96	1.96	1.96	2.0	2.21	2.21	2.20	2.2	2.48	2.48	2.47	2.5	2.78	2.78	2.77	2.8	3.13	3.13	3.12	3.1
	Amps	6.86	6.85	6.83	6.9	7.87	7.87	7.85	7.9	9.01	9.00	8.98	9.1	10.24	10.23	10.21	10.3	11.61	11.60	11.59	11.7	13.22	13.22	13.20	13.3
	Hi PR	251	252	254	258.5	291	292	294	298.0	332	333	335	339.4	377	378	380	383.9	425	426	428	432.0	476	477	479	483.2
	Lo PR	127	128	132	136.9	134	136	139	144.5	141	143	146	151.2	147	148	152	156.8	152	154	157	162.4	159	161	164	169.3
	MBh	29.1	29.5	30.3	31.6	28.8	29.2	30.1	31.3	28.1	28.5	29.3	30.6	26.8	27.2	28.1	29.4	25.3	25.7	26.5	27.8	23.9	24.3	25.1	26.4
	S/T	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.7	1.00	1.00	0.92	0.8	1.00	1.00	0.8	0.8	1.00	1.00	1.00	0.8
	ΔT	27.38	25.73	22.64	19.5	27.33	25.68	22.60	19.4	27.56	25.91	22.83	19.6	27.32	25.66	22.58	19.4	27.10	25.44	22.36	19.2	28.13	26.48	23.40	20.2
1050	kW	1.76	1.75	1.75	1.8	1.98	1.98	1.97	2.0	2.23	2.22	2.22	2.2	2.49	2.49	2.49	2.5	2.79	2.79	2.79	2.8	3.15	3.14	3.14	3.2
	Amps	6.93	6.92	6.90	7.0	7.95	7.94	7.92	8.0	9.08	9.07	9.06	9.1	10.31	10.30	10.29	10.4	11.69	11.68	11.66	11.7	13.30	13.29	13.27	13.3
	Hi PR	254	255	257	261.4	294	295	297	300.9	335	336	338	342.3	380	381	382	386.8	428	429	430	434.8	479	480	482	486.1
	Lo PR	129	131	134	139.4	137	138	142	147.0	144	145	148	153.6	149	151	154	159.3	155	156	159	164.8	162	163	166	171.7
	MBh	29.3	29.7	30.6	31.8	29.1	29.5	30.3	31.6	28.3	28.7	29.6	30.9	27.1	27.5	28.3	29.6	25.5	25.9	26.8	28.1	24.1	24.5	25.4	26.6
	S/T	1.00	1.00	0.89	0.7	1.00	1.00	0.90	0.7	1.00	1.00	0.92	0.8	1.00	1.00	0.94	0.8	1.00	1.00	0.8	0.8	1.00	1.00	1.00	0.9
	ΔT	26.88	25.23	22.15	19.0	26.84	25.19	22.10	18.9	27.07	25.42	22.34	19.1	26.82	25.17	22.09	18.9	26.60	24.95	21.87	18.7	27.63	25.98	22.90	19.7
	kW	1.76	1.76	1.76	1.8	1.98	1.98	1.98	2.0	2.23	2.23	2.23	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.79	2.8	3.15	3.15	3.15	3.2
	Amps	6.96	6.95	6.93	7.0	7.97	7.96	7.95	8.0	9.11	9.10	9.08	9.2	10.34	10.33	10.31	10.4	11.71	11.70	11.69	11.8	13.32	13.31	13.30	13.4
	Hi PR	255	256	258	262.6	295	296	298	302.1	336	337	339	343.5	381	382	384	388.0	429	430	432	436.0	480	481	483	487.3
Lo PR	130	132	135	140.5	138	140	143	148.1	145	146	149	154.8	150	152	155	160.4	156	157	161	165.9	163	164	168	172.8	

IDB = Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling, 5.7°F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15.18°F @ the compressor suction access fitting connection.

Shaded area reflects AHRI conditions.

Amps: Unit amps (comp. + evaporator + condenser fan motors)

KW = Total system power



IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
70	1050	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71							
		S/T	35.4	35.9	37.0	-	35.1	35.6	36.6	-	34.2	34.7	35.7	-	32.6	33.1	34.1	-	30.6	31.1	32.2	-	28.9	29.4	30.4	-	28.9	29.4	30.4	-							
		ΔT	19.20	17.43	14.11	-	19.15	17.38	14.06	-	19.40	17.63	14.31	-	19.14	17.36	14.04	-	18.90	17.12	13.81	-	20.01	18.24	14.92	-	20.01	18.24	14.92	-							
		kW	2.21	2.20	2.20	-	2.48	2.48	2.48	-	2.79	2.79	2.78	-	3.12	3.12	3.12	-	3.50	3.50	3.49	-	3.94	3.93	3.93	-	3.94	3.93	3.93	-							
		Amps	8.85	8.84	8.82	-	10.12	10.11	10.08	-	11.53	11.52	11.50	-	13.06	13.05	13.03	-	14.77	14.76	14.73	-	16.77	16.76	16.74	-	16.77	16.76	16.74	-							
	Hi PR	250	251	253	-	289	290	292	-	331	332	334	-	375	376	378	-	423	424	426	-	474	475	477	-	474	475	477	-								
	Lo PR	126	127	130	-	133	135	138	-	140	141	145	-	146	147	150	-	151	153	156	-	158	160	163	-	158	160	163	-								
1200	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
	S/T	35.9	36.4	37.4	-	35.6	36.1	37.1	-	34.6	35.1	36.2	-	33.0	33.5	34.6	-	31.1	31.6	32.7	-	29.3	29.8	30.9	-	29.3	29.8	30.9	-								
	ΔT	18.13	16.35	13.04	-	18.08	16.31	12.99	-	18.33	16.56	13.24	-	18.06	16.29	12.97	-	17.83	16.05	12.73	-	18.94	17.16	13.85	-	18.94	17.16	13.85	-								
	kW	2.22	2.22	2.21	-	2.50	2.49	2.49	-	2.81	2.80	2.80	-	3.14	3.14	3.13	-	3.51	3.51	3.51	-	3.95	3.95	3.94	-	3.95	3.95	3.94	-								
	Amps	8.92	8.91	8.88	-	10.18	10.17	10.15	-	11.59	11.58	11.56	-	13.12	13.11	13.09	-	14.83	14.82	14.80	-	16.83	16.82	16.80	-	16.83	16.82	16.80	-								
Hi PR	252	253	255	-	292	293	294	-	333	334	336	-	377	378	380	-	425	426	428	-	477	478	479	-	477	478	479	-									
Lo PR	127	129	132	-	135	137	140	-	142	143	147	-	147	149	152	-	153	155	158	-	160	161	165	-	160	161	165	-									
1350	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
	S/T	36.4	36.9	38.0	-	36.1	36.6	37.7	-	35.2	35.7	36.7	-	33.6	34.1	35.2	-	31.7	32.2	33.2	-	29.9	30.4	31.4	-	29.9	30.4	31.4	-								
	ΔT	17.23	15.45	12.14	-	17.18	15.40	12.09	-	17.43	15.65	12.34	-	17.16	15.38	12.07	-	16.92	15.15	11.83	-	18.04	16.26	12.94	-	18.04	16.26	12.94	-								
	kW	2.23	2.23	2.23	-	2.51	2.51	2.50	-	2.82	2.82	2.81	-	3.15	3.15	3.14	-	3.52	3.52	3.52	-	3.96	3.96	3.96	-	3.96	3.96	3.96	-								
	Amps	8.97	8.96	8.94	-	10.24	10.23	10.20	-	11.65	11.64	11.62	-	13.18	13.17	13.15	-	14.89	14.88	14.85	-	16.89	16.88	16.86	-	16.89	16.88	16.86	-								
Hi PR	254	255	257	-	294	295	296	-	335	336	338	-	379	380	382	-	427	428	430	-	479	480	481	-	479	480	481	-									
Lo PR	129	131	134	-	137	139	142	-	144	145	149	-	149	151	154	-	155	157	160	-	162	164	167	-	162	164	167	-									

75	1050	MBh	35.4	35.9	37.0	38.6	35.1	35.6	36.7	38.3	34.2	34.7	35.7	37.4	32.6	33.1	34.2	35.8	30.6	31.1	32.2	33.8	28.9	29.4	30.4	32.0
		S/T	0.76	0.68	0.54	0.4	1.00	0.68	0.54	0.4	1.00	0.71	0.57	0.4	1.00	0.73	0.59	0.4	1.00	0.75	0.61	0.5	1.00	1.00	0.67	0.5
		ΔT	23.11	21.33	18.02	14.6	23.06	21.28	17.97	14.5	23.31	21.53	18.22	14.8	23.04	21.27	17.95	14.5	22.80	21.03	17.71	14.3	23.92	22.14	18.82	15.4
		kW	2.20	2.20	2.20	2.2	2.48	2.48	2.47	2.5	2.79	2.79	2.78	2.8	3.12	3.12	3.12	3.1	3.50	3.49	3.49	3.5	3.93	3.93	3.93	3.9
		Amps	8.84	8.83	8.81	8.9	10.11	10.10	10.08	10.2	11.52	11.51	11.49	11.6	13.05	13.04	13.02	13.1	14.76	14.75	14.73	14.8	16.76	16.75	16.73	16.8
	Hi PR	250	251	253	257.4	290	291	292	296.8	331	332	334	338.2	375	377	378	382.6	423	425	426	430.6	475	476	477	481.8	
	Lo PR	126	127	130	135.7	133	135	138	143.4	140	142	145	150.1	146	147	150	155.7	151	153	156	161.3	158	160	163	168.2	
	1200	MBh	35.9	36.4	37.4	39.1	35.6	36.1	37.1	38.7	34.6	35.1	36.2	37.8	33.1	33.6	34.6	36.2	31.1	31.6	32.7	34.3	29.3	29.8	30.9	32.5
		S/T	0.82	0.74	0.60	0.5	1.00	0.75	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.73	0.6
		ΔT	22.04	20.26	16.94	13.5	21.99	20.21	16.89	13.5	22.24	20.46	17.14	13.7	21.97	20.19	16.88	13.4	21.73	19.96	16.64	13.2	22.84	21.07	17.75	14.3
kW		2.22	2.22	2.21	2.2	2.49	2.49	2.49	2.5	2.80	2.80	2.80	2.8	3.14	3.14	3.13	3.2	3.51	3.51	3.50	3.5	3.95	3.95	3.94	4.0	
Amps		8.91	8.90	8.88	9.0	10.17	10.16	10.14	10.2	11.59	11.58	11.55	11.7	13.11	13.10	13.08	13.2	14.82	14.81	14.79	14.9	16.83	16.82	16.79	16.9	
1350	Hi PR	252	253	255	259.5	292	293	295	299.0	333	334	336	340.3	378	379	380	384.8	426	427	428	432.7	477	478	480	483.9	
	Lo PR	127	129	132	137.6	135	137	140	145.2	142	143	147	151.9	147	149	152	157.6	153	155	158	163.1	160	162	165	170.1	
	MBh	36.4	36.9	38.0	39.6	36.1	36.6	37.7	39.3	35.2	35.7	36.8	38.4	33.6	34.1	35.2	36.8	31.7	32.2	33.2	34.8	29.9	30.4	31.5	33.1	
	S/T	0.85	0.77	0.63	0.5	1.00	0.78	0.64	0.5	1.00	0.81	0.67	0.5	1.00	0.83	0.69	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.76	0.6	
	ΔT	21.13	19.36	16.04	12.6	21.08	19.31	15.99	12.6	21.33	19.56	16.24	12.8	21.07	19.29	15.97	12.5	20.83	19.05	15.74	12.3	21.94	20.16	16.85	13.4	
1500	kW	2.23	2.23	2.22	2.2	2.51	2.50	2.50	2.5	2.82	2.81	2.81	2.8	3.15	3.15	3.14	3.2	3.52	3.52	3.52	3.5	3.96	3.96	3.95	4.0	
	Amps	8.96	8.95	8.93	9.0	10.23	10.22	10.20	10.3	11.64	11.63	11.61	11.7	13.17	13.16	13.14	13.2	14.88	14.87	14.85	14.9	16.88	16.87	16.85	16.9	
	Hi PR	254	255	257	261.6	294	295	297	301.0	335	336	338	342.3	380	381	382	386.8	428	429	430	434.8	479	480	482	486.0	
	Lo PR	130	131	134	139.6	137	139	142	147.3	144	145	149	153.9	150	151	154	159.6	155	157	160	165.2	162	164	167	172.1	

DB = Entering Indoor Dry Bulb Temperature	Shaded area reflects AHRI (TVA) conditions.	KW = Total system power
High and low pressures are measured at the liquid and suction access fittings.		Amps: Unit amps (comp. + evaporator + condenser fan motors)
Design Subcooling, 9-12 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 7-11°F @ the compressor suction access fitting connection.		



		OUTDOOR AMBIENT TEMPERATURE															115														
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	
80	MbH	35.6	36.1	37.2	38.8	35.3	35.8	36.8	38.5	34.4	34.9	35.9	37.5	32.8	33.3	34.3	36.0	30.8	31.3	32.4	34.0	29.1	29.6	30.6	32.2						
	S/T	1.00	0.81	0.67	0.5	1.00	0.81	0.67	0.5	1.00	0.84	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.80	0.6						
	ΔT	27.04	25.26	21.95	18.5	26.99	25.22	21.90	18.5	27.24	25.46	22.15	18.7	26.97	25.20	21.88	18.4	26.74	24.96	21.64	18.2	27.85	26.07	22.76	19.3						
	kW	2.21	2.20	2.20	2.2	2.48	2.48	2.48	2.5	2.79	2.79	2.78	2.8	3.12	3.12	3.12	3.1	3.50	3.50	3.49	3.5	3.94	3.93	3.93	3.9						
	Amps	8.85	8.84	8.82	8.9	10.11	10.10	10.08	10.2	11.53	11.52	11.50	11.6	13.06	13.05	13.02	13.1	14.76	14.75	14.73	14.8	16.77	16.76	16.74	16.8						
	Hi PR	251	252	253	257.8	290	291	293	297.3	331	332	334	338.6	376	377	379	383.1	424	425	427	431.1	475	476	478	482.3						
1200	Lo PR	126	128	131	136.3	134	135	139	143.9	141	142	145	150.6	146	148	151	156.3	152	153	156	161.8	159	160	163	168.8						
	MbH	36.1	36.6	37.6	39.2	35.8	36.3	37.3	38.9	34.8	35.3	36.4	38.0	33.2	33.7	34.8	36.4	31.3	31.8	32.9	34.5	29.5	30.0	31.1	32.7						
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.86	0.7						
	ΔT	25.97	24.19	20.87	17.4	25.92	24.14	20.83	17.4	26.17	24.39	21.08	17.6	25.90	24.12	20.81	17.4	25.66	23.89	20.57	17.1	26.77	25.00	21.68	18.2						
	kW	2.22	2.22	2.21	2.2	2.50	2.49	2.49	2.5	2.80	2.80	2.80	2.8	3.14	3.14	3.13	3.2	3.51	3.51	3.51	3.5	3.95	3.95	3.94	4.0						
	Amps	8.91	8.90	8.88	9.0	10.18	10.17	10.15	10.2	11.59	11.58	11.56	11.7	13.12	13.11	13.09	13.2	14.83	14.82	14.80	14.9	16.83	16.82	16.80	16.9						
1350	Hi PR	253	254	256	260.0	292	293	295	299.4	334	335	336	340.7	378	379	381	385.2	426	427	429	433.2	477	478	480	484.4						
	Lo PR	128	130	133	138.1	136	137	140	145.8	142	144	147	152.5	148	150	153	158.1	154	155	158	163.7	161	162	165	170.6						
	MbH	36.6	37.1	38.2	39.8	36.3	36.8	37.9	39.5	35.4	35.9	36.9	38.6	33.8	34.3	35.4	37.0	31.9	32.4	33.4	35.0	30.1	30.6	31.6	33.3						
	S/T	1.00	0.90	0.76	0.6	1.00	0.91	0.77	0.6	1.00	1.00	0.80	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.80	0.7						
	ΔT	25.06	23.29	19.97	16.5	25.01	23.24	19.92	16.5	25.26	23.49	20.17	16.7	25.00	23.22	19.90	16.5	24.76	22.98	19.67	16.2	25.87	24.10	20.78	17.3						
	kW	2.23	2.23	2.22	2.2	2.51	2.51	2.50	2.5	2.82	2.81	2.81	2.8	3.15	3.15	3.14	3.2	3.52	3.52	3.52	3.5	3.96	3.96	3.96	4.0						
85	Amps	8.97	8.96	8.94	9.0	10.23	10.23	10.20	10.3	11.65	11.64	11.62	11.7	13.18	13.17	13.14	13.2	14.88	14.87	14.85	14.9	16.89	16.88	16.86	17.0						
	Hi PR	255	256	258	262.0	294	295	297	301.5	336	337	338	342.8	380	381	383	387.3	428	429	431	435.3	479	480	482	486.5						
	Lo PR	130	132	135	140.2	138	139	142	147.8	144	146	149	154.5	150	152	155	160.2	156	157	160	165.7	163	164	167	172.7						
	MbH	37.2	37.7	38.8	40.4	36.9	37.4	38.5	40.1	36.0	36.5	37.5	39.2	34.4	34.9	36.0	37.6	32.5	33.0	34.0	35.6	30.7	31.2	32.2	33.9						
	S/T	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.8	1.00	1.00	0.92	0.8	1.00	1.00	0.80	0.8	1.00	1.00	0.80	0.8						
	ΔT	28.55	26.77	23.46	20.0	28.50	26.73	23.41	20.0	28.75	26.98	23.66	20.2	28.48	26.71	23.39	20.0	28.22	26.45	23.13	20.0	29.33	27.56	24.24	20.8						

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																			
				65						75						85						95						105						115					
				ENTERING INDOOR WET BULB TEMPERATURE																																			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71										
1100	MBh	42.6	43.2	44.5	-	42.2	42.8	44.1	-	41.1	41.7	43.0	-	39.2	39.8	41.1	-	36.8	37.5	38.7	-	34.7	35.3	36.6	-														
	S/T	0.58	0.50	0.37	-	0.59	0.51	0.38	-	0.61	0.54	0.40	-	0.63	0.55	0.42	-	1.00	0.58	0.44	-	1.00	0.63	0.49	-														
	ΔT	20.76	18.87	15.34	-	20.71	18.82	15.28	-	20.98	19.08	15.55	-	20.69	18.80	15.27	-	20.44	18.55	15.01	-	21.62	19.73	16.20	-														
	kW	2.66	2.66	2.65	-	2.99	2.99	2.99	-	3.37	3.36	3.36	-	3.77	3.76	3.76	-	4.22	4.21	4.21	-	4.74	4.74	4.73	-														
	Amps	10.12	10.11	10.09	-	11.57	11.56	11.53	-	13.18	13.17	13.15	-	14.93	14.91	14.89	-	16.87	16.86	16.84	-	19.16	19.15	19.13	-														
	Hi PR	259	260	262	-	300	301	303	-	343	344	346	-	389	390	392	-	439	440	442	-	492	493	495	-														
	Lo PR	123	124	127	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-														
70	MBh	43.3	43.9	45.2	-	42.9	43.5	44.8	-	41.8	42.4	43.7	-	39.9	40.5	41.8	-	37.5	38.1	39.4	-	35.4	36.0	37.3	-														
	S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.70	0.57	-														
	ΔT	19.32	17.43	13.89	-	19.27	17.37	13.84	-	19.53	17.64	14.11	-	19.25	17.35	13.82	-	18.99	17.10	13.57	-	20.18	18.29	14.75	-														
	kW	2.68	2.68	2.68	-	3.02	3.01	3.01	-	3.39	3.38	3.38	-	3.79	3.79	3.78	-	4.24	4.23	4.23	-	4.76	4.76	4.75	-														
	Amps	10.22	10.21	10.18	-	11.66	11.65	11.63	-	13.28	13.26	13.24	-	15.02	15.01	14.98	-	16.97	16.96	16.93	-	19.26	19.25	19.22	-														
	Hi PR	262	263	265	-	303	304	306	-	346	347	348	-	392	393	395	-	442	443	444	-	495	496	498	-														
	Lo PR	125	126	129	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	157	158	161	-														
1500	MBh	44.1	44.7	46.0	-	43.8	44.4	45.6	-	42.6	43.2	44.5	-	40.7	41.3	42.6	-	38.4	39.0	40.3	-	36.2	36.8	38.1	-														
	S/T	0.69	0.62	0.49	-	0.70	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-														
	ΔT	18.15	16.26	12.73	-	18.10	16.21	12.67	-	18.37	16.47	12.94	-	18.08	16.19	12.65	-	17.83	15.93	12.40	-	19.01	17.12	13.59	-														
	kW	2.70	2.70	2.69	-	3.03	3.03	3.03	-	3.40	3.40	3.40	-	3.81	3.80	3.80	-	4.25	4.25	4.25	-	4.78	4.78	4.77	-														
	Amps	10.30	10.28	10.26	-	11.74	11.73	11.70	-	13.35	13.34	13.32	-	15.10	15.09	15.06	-	17.05	17.03	17.01	-	19.33	19.32	19.30	-														
	Hi PR	264	265	267	-	305	306	308	-	348	349	351	-	394	395	397	-	444	445	447	-	497	498	500	-														
	Lo PR	127	129	132	-	135	136	139	-	141	143	146	-	147	148	151	-	152	154	157	-	159	161	164	-														

<b>1100</b>	MBh	42.6	43.2	44.5	46.5	42.3	42.9	44.1	46.1	41.1	41.7	43.0	45.0	39.2	<b>39.8</b>	41.1	43.1	36.9	37.5	38.8	40.7	34.7	35.3	36.6	38.6
	S/T	0.71	0.63	0.50	0.36	0.71	0.64	0.50	0.36	1.00	0.66	0.53	0.39	1.00	<b>0.68</b>	0.55	0.41	1.00	0.70	0.57	0.43	1.00	1.00	0.62	0.48
	ΔT	24.92	23.03	19.50	15.84	24.87	22.98	19.45	15.78	25.14	23.24	19.71	16.05	24.85	<b>22.96</b>	19.43	15.77	24.60	22.71	19.17	15.51	25.78	23.89	20.36	16.70
	kW	2.66	2.66	2.65	2.68	2.99	2.99	2.98	3.01	3.36	3.36	3.36	3.38	3.76	<b>3.76</b>	3.76	3.78	4.21	4.21	4.20	4.23	4.74	4.74	4.73	4.76
	Amps	10.12	10.10	10.08	10.19	11.56	11.55	11.52	11.63	13.17	13.16	13.14	13.25	14.92	<b>14.90</b>	14.88	14.99	16.87	16.85	16.83	16.94	19.15	19.14	19.12	19.23
<b>1300</b>	Hi PR	259	260	262	267	300	301	303	308	343	344	346	350	389	<b>390</b>	392	397	439	440	442	446	492	493	495	500
	Lo PR	123	124	127	132	130	132	135	140	137	138	141	146	142	<b>144</b>	147	152	148	149	152	157	154	156	159	164
	MBh	43.3	43.9	45.2	47.1	42.9	43.5	44.8	46.8	41.8	42.4	43.7	45.6	39.9	<b>40.5</b>	41.8	43.7	37.6	38.2	39.4	41.4	35.4	36.0	37.3	39.2
	S/T	0.78	0.71	0.58	0.43	0.79	0.72	0.58	0.44	1.00	0.74	0.61	0.47	1.00	<b>0.76</b>	0.63	0.48	1.00	0.78	0.65	0.51	1.00	1.00	0.70	0.56
	ΔT	23.48	21.59	18.05	14.39	23.43	21.53	18.00	14.34	23.69	21.80	18.27	14.61	23.41	<b>21.52</b>	17.98	14.32	23.15	21.26	17.73	14.07	24.34	22.45	18.91	15.25
<b>1500</b>	kW	2.68	2.68	2.67	2.70	3.01	3.01	3.01	3.03	3.39	3.38	3.38	3.40	3.79	<b>3.78</b>	3.78	3.80	4.23	4.23	4.23	4.25	4.76	4.76	4.75	4.78
	Amps	10.21	10.20	10.17	10.28	11.65	11.64	11.62	11.73	13.27	13.25	13.23	13.34	15.01	<b>15.00</b>	14.97	15.09	16.96	16.95	16.92	17.03	19.25	19.24	19.21	19.32
	Hi PR	262	263	265	269	303	304	306	310	346	347	349	353	392	<b>393</b>	395	399	442	443	445	449	495	496	498	502
	Lo PR	125	126	129	135	132	134	137	142	139	140	143	149	144	<b>146</b>	149	154	150	151	154	160	157	158	161	166
	MBh	44.2	44.8	46.0	48.0	43.8	44.4	45.7	47.6	42.7	43.3	44.5	46.5	40.7	<b>41.4</b>	42.6	44.6	38.4	39.0	40.3	42.2	36.3	36.9	38.1	40.1
<b>1500</b>	S/T	0.82	0.75	0.61	0.47	1.00	0.75	0.62	0.48	1.00	0.78	0.64	0.50	1.00	<b>0.80</b>	0.66	0.52	1.00	0.82	0.69	0.54	1.00	1.00	0.74	0.59
	ΔT	22.31	20.42	16.89	13.23	22.26	20.37	16.83	13.17	22.53	20.63	17.10	13.44	22.24	<b>20.35</b>	16.82	13.15	21.99	20.10	16.56	12.90	23.17	21.28	17.75	14.09
	kW	2.70	2.70	2.69	2.72	3.03	3.03	3.02	3.05	3.40	3.40	3.39	3.42	3.80	<b>3.80</b>	3.80	3.82	4.25	4.25	4.24	4.27	4.78	4.78	4.77	4.80
	Amps	10.29	10.27	10.25	10.36	11.73	11.72	11.69	11.80	13.34	13.33	13.31	13.42	15.09	<b>15.08</b>	15.05	15.16	17.04	17.02	17.00	17.11	19.32	19.31	19.29	19.40
	Hi PR	265	266	268	272	305	307	308	313	348	350	351	356	395	<b>396</b>	398	402	444	446	447	452	498	499	500	505
	Lo PR	127	129	132	137	135	136	139	145	141	143	146	151	147	<b>148</b>	151	157	152	154	157	162	159	161	164	169

IDB = Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling, 8-12 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 8-12°F @ the compressor suction access fitting connection.

Shaded area reflects AHRI (TVA) conditions.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

KW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
1100	MBh	42.86	43.46	44.74	46.69	42.48	43.08	44.36	46.31	41.36	41.97	43.24	45.19	39.44	40.05	41.32	43.27	37.10	37.70	38.98	40.93	34.95	35.56	36.83	38.78	34.95	35.56	36.83	38.78		
	S/T	1.00	0.76	0.62	0.48	1.00	0.76	0.63	0.49	1.00	0.79	0.65	0.51	1.00	0.81	0.67	0.53	1.00	1.00	0.69	0.55	1.00	1.00	0.74	0.60	1.00	1.00	0.74	0.60		
	ΔT	29.11	27.22	23.69	20.03	29.06	27.17	23.63	19.97	29.33	27.43	23.90	20.24	29.04	27.15	23.61	19.95	28.79	26.90	23.36	19.70	29.97	28.08	24.55	20.89	29.97	28.08	24.55	20.89		
	kW	2.66	2.66	2.65	2.68	2.99	2.99	2.99	3.01	3.37	3.36	3.36	3.38	3.77	3.76	3.76	3.78	4.21	4.21	4.21	4.23	4.74	4.74	4.73	4.76	4.74	4.74	4.73	4.76		
	Amps	10.12	10.11	10.09	10.20	11.57	11.56	11.53	11.64	13.18	13.17	13.14	13.25	14.92	14.91	14.89	15.00	16.87	16.86	16.84	16.95	19.16	19.15	19.12	19.23	19.16	19.15	19.12	19.23		
	Hi PR	259.65	260.78	262.60	267.13	300.60	301.72	303.55	308.07	343.49	344.62	346.44	350.97	389.68	390.81	392.63	397.16	439.49	440.61	442.44	446.96	492.63	493.76	495.58	500.10	492.63	493.76	495.58	500.10		
80	Lo PR	123.10	124.61	127.74	132.98	130.57	132.09	135.22	140.46	137.12	138.64	141.77	147.01	142.66	144.18	147.31	152.55	148.10	149.62	152.75	157.98	154.90	156.42	159.55	164.79	154.90	156.42	159.55	164.79		
	MBh	43.54	44.14	45.42	47.37	43.16	43.76	45.04	46.99	42.04	42.64	43.92	45.87	40.12	40.72	42.00	43.95	37.77	38.38	39.65	41.60	35.63	36.24	37.51	39.46	35.63	36.24	37.51	39.46		
	S/T	1.00	0.83	0.70	0.56	1.00	0.84	0.71	0.56	1.00	0.86	0.73	0.59	1.00	1.00	0.75	0.61	1.00	1.00	0.77	0.63	1.00	1.00	0.82	0.68	1.00	1.00	0.82	0.68		
	ΔT	27.67	25.78	22.24	18.58	27.62	25.72	22.19	18.53	27.88	25.99	22.46	18.80	27.60	25.70	22.17	18.51	27.34	25.45	21.92	18.26	28.53	26.64	23.10	19.44	28.53	26.64	23.10	19.44		
	kW	2.68	2.68	2.68	2.70	3.02	3.01	3.01	3.03	3.39	3.38	3.38	3.40	3.79	3.79	3.79	3.81	4.24	4.23	4.23	4.25	4.76	4.76	4.75	4.78	4.76	4.76	4.75	4.78		
	Amps	10.22	10.21	10.18	10.29	11.66	11.65	11.63	11.74	13.27	13.26	13.24	13.35	15.02	15.01	14.98	15.09	16.97	16.96	16.93	17.04	19.25	19.24	19.22	19.33	19.25	19.24	19.22	19.33		
1500	Hi PR	262.39	263.52	265.34	269.87	303.34	304.46	306.29	310.81	346.23	347.36	349.18	353.71	392.42	393.55	395.37	399.90	442.23	443.35	445.18	449.70	495.37	496.50	498.32	502.84	495.37	496.50	498.32	502.84		
	Lo PR	125.30	126.82	129.95	135.19	132.78	134.30	137.43	142.67	139.33	140.85	143.98	149.22	144.87	146.39	149.52	154.75	150.31	151.83	154.96	160.19	157.11	158.63	161.76	167.00	157.11	158.63	161.76	167.00		
	MBh	44.39	44.99	46.27	48.22	44.00	44.61	45.88	47.83	42.89	43.49	44.77	46.72	40.97	41.57	42.85	44.80	38.62	39.23	40.50	42.45	36.48	37.08	38.36	40.31	36.48	37.08	38.36	40.31		
	S/T	1.00	0.87	0.74	0.60	1.00	0.88	0.74	0.60	1.00	0.90	0.77	0.63	1.00	1.00	0.79	0.65	1.00	1.00	0.81	0.67	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72		
	ΔT	26.50	24.61	21.08	17.41	26.45	24.56	21.02	17.36	26.72	24.82	21.29	17.63	26.43	24.54	21.00	17.34	26.18	24.28	20.75	17.09	27.36	25.47	21.94	18.28	27.36	25.47	21.94	18.28		
	kW	2.70	2.70	2.69	2.72	3.03	3.03	3.03	3.05	3.40	3.40	3.40	3.42	3.81	3.80	3.80	3.82	4.25	4.25	4.25	4.27	4.78	4.78	4.77	4.80	4.78	4.78	4.77	4.80		
85	Amps	10.29	10.28	10.26	10.37	11.74	11.73	11.70	11.81	13.35	13.34	13.31	13.42	15.09	15.08	15.06	15.17	17.04	17.03	17.01	17.12	19.33	19.32	19.29	19.41	19.33	19.32	19.29	19.41		
	Hi PR	265.03	266.15	267.98	272.50	305.98	307.10	308.93	313.45	348.87	350.00	351.82	356.34	395.06	396.19	398.01	402.53	444.86	445.99	447.81	452.34	498.01	499.13	500.96	505.48	498.01	499.13	500.96	505.48		
	Lo PR	127.80	129.32	132.45	137.69	135.28	136.80	139.93	145.17	141.83	143.35	146.48	151.72	147.37	148.89	152.02	157.26	152.81	154.33	157.46	162.69	159.61	161.13	164.26	169.50	159.61	161.13	164.26	169.50		
	MBh	43.6	44.2	45.5	47.4	43.2	43.8	45.1	47.0	42.1	42.7	44.0	45.9	40.2	40.8	42.0	44.0	37.8	38.4	39.7	41.6	35.7	36.3	37.6	39.5	35.7	36.3	37.6	39.5		
	S/T	1.00	0.86	0.72	0.58	1.00	0.86	0.73	0.59	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.78	0.78	1.00	1.00	0.78	0.78		
	ΔT	32.83	30.93	27.40	23.74	32.77	30.88	27.35	23.69	33.04	31.15	27.62	23.95	32.76	30.86	27.33	23.67	32.50	30.61	27.08	23.42	33.69	31.79	28.26	24.60	33.69	31.79	28.26	24.60		

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	
70	MBh	30.6	31.1	32.0	-	-	30.4	30.8	31.7	-	-	29.6	30.0	30.9	-	-	28.2	28.6	29.5	-	-	26.5	26.9	27.8	-	-	25.0	25.4	26.3	-	
	S/T	0.60	0.52	0.38	-	-	0.60	0.52	0.39	-	-	0.63	0.55	0.41	-	-	1.00	0.57	0.43	-	-	1.00	0.59	0.45	-	-	1.00	0.64	0.51	-	
	ΔT	20.04	18.21	14.80	-	-	19.99	18.16	14.75	-	-	20.24	18.42	15.01	-	-	19.97	18.14	14.73	-	-	19.72	17.90	14.49	-	-	20.87	19.04	15.63	-	
	kW	1.67	1.67	1.67	-	-	1.88	1.88	1.88	-	-	2.12	2.12	2.11	-	-	2.37	2.37	2.36	-	-	2.65	2.65	2.65	-	-	2.98	2.98	2.98	-	
	Amps	6.37	6.36	6.35	-	-	7.28	7.27	7.25	-	-	8.29	8.28	8.27	-	-	9.39	9.38	9.37	-	-	10.61	10.61	10.59	-	-	12.05	12.05	12.03	-	
	Hi PR	248	249	250	-	-	287	288	290	-	-	328	329	331	-	-	372	373	375	-	-	419	421	422	-	-	470	471	473	-	
	Lo PR	126	128	131	-	-	134	135	138	-	-	140	142	145	-	-	146	148	151	-	-	152	153	156	-	-	159	160	163	-	
910	MBh	31.1	31.6	32.5	-	-	30.9	31.3	32.2	-	-	30.0	30.5	31.4	-	-	28.7	29.1	30.0	-	-	27.0	27.4	28.3	-	-	25.4	25.9	26.8	-	
	S/T	0.67	0.60	0.46	-	-	0.68	0.60	0.47	-	-	0.71	0.63	0.49	-	-	1.00	0.65	0.51	-	-	1.00	0.67	0.53	-	-	1.00	0.72	0.59	-	
	ΔT	18.64	16.82	13.41	-	-	18.59	16.77	13.36	-	-	18.85	17.02	13.61	-	-	18.57	16.75	13.34	-	-	18.33	16.50	13.09	-	-	19.47	17.65	14.24	-	
	kW	1.69	1.69	1.68	-	-	1.90	1.90	1.89	-	-	2.13	2.13	2.13	-	-	2.38	2.38	2.38	-	-	2.67	2.66	2.66	-	-	3.00	2.99	2.99	-	
	Amps	6.43	6.42	6.41	-	-	7.34	7.33	7.31	-	-	8.35	8.34	8.33	-	-	9.45	9.44	9.43	-	-	10.67	10.67	10.65	-	-	12.11	12.11	12.09	-	
	Hi PR	250	251	253	-	-	289	290	292	-	-	330	331	333	-	-	374	376	377	-	-	422	423	425	-	-	473	474	476	-	
	Lo PR	128	130	133	-	-	136	137	141	-	-	143	144	147	-	-	148	150	153	-	-	154	155	159	-	-	161	162	166	-	
1050	MBh	31.7	32.2	33.1	-	-	31.5	31.9	32.8	-	-	30.7	31.1	32.0	-	-	29.3	29.7	30.6	-	-	27.6	28.0	28.9	-	-	26.1	26.5	27.4	-	
	S/T	0.71	0.64	0.50	-	-	0.72	0.64	0.51	-	-	1.00	0.67	0.53	-	-	1.00	0.69	0.55	-	-	1.00	0.71	0.57	-	-	1.00	1.00	0.63	-	
	ΔT	17.52	15.69	12.28	-	-	17.47	15.64	12.23	-	-	17.72	15.90	12.49	-	-	17.45	15.62	12.21	-	-	17.20	15.38	11.97	-	-	18.35	16.52	13.11	-	
	kW	1.70	1.70	1.69	-	-	1.91	1.91	1.90	-	-	2.14	2.14	2.14	-	-	2.39	2.39	2.39	-	-	2.68	2.67	2.67	-	-	3.01	3.01	3.00	-	
	Amps	6.48	6.47	6.45	-	-	7.38	7.38	7.36	-	-	8.40	8.39	8.38	-	-	9.50	9.49	9.47	-	-	10.72	10.71	10.70	-	-	12.16	12.15	12.14	-	
	Hi PR	253	254	256	-	-	292	293	295	-	-	333	334	336	-	-	377	378	380	-	-	425	426	427	-	-	475	476	478	-	
	Lo PR	131	132	136	-	-	138	140	143	-	-	145	147	150	-	-	151	152	156	-	-	156	158	161	-	-	163	165	168	-	
770	MBh	30.7	31.1	32.0	33.4	33.1	30.4	30.8	31.7	33.1	33.1	29.6	30.0	30.9	32.3	32.3	28.2	28.6	29.6	31.0	31.0	26.5	26.9	27.9	29.3	25.0	25.4	26.3	27.7		
	S/T	0.73	0.65	0.51	0.37	0.37	1.00	0.66	0.52	0.37	0.37	1.00	0.68	0.54	0.40	0.40	1.00	0.70	0.56	0.42	0.42	1.00	0.72	0.59	0.44	1.00	1.00	0.64	0.49		
	ΔT	24.05	22.22	18.81	15.28	15.23	24.00	22.17	18.76	15.23	15.23	24.26	22.43	19.02	15.49	15.49	23.98	22.16	18.75	15.21	15.21	23.74	21.91	18.50	14.97	24.88	23.05	19.65	16.11		
	kW	1.67	1.67	1.67	1.68	1.68	1.88	1.88	1.88	1.89	1.89	2.12	2.11	2.11	2.13	2.13	2.37	2.37	2.36	2.38	2.38	2.65	2.65	2.64	2.66	2.98	2.98	2.98	2.99		
	Amps	6.36	6.36	6.34	6.41	6.41	7.27	7.26	7.25	7.32	7.32	8.28	8.28	8.26	8.33	8.33	9.38	9.38	9.36	9.43	9.43	10.61	10.60	10.59	10.66	12.05	12.04	12.02	12.09		
	Hi PR	248	249	251	255	255	287	288	290	294	294	328	329	331	335	335	372	373	375	379	379	420	421	423	427	470	472	473	478		
	Lo PR	126	128	131	136	136	134	135	138	144	144	140	142	145	151	151	146	148	151	156	156	152	153	156	162	159	160	163	169		
910	MBh	31.1	31.6	32.5	33.9	33.9	30.9	31.3	32.2	33.6	33.6	30.1	30.5	31.4	32.8	32.8	28.7	29.1	30.0	31.4	31.4	27.0	27.4	28.4	29.8	25.5	25.9	26.8	28.2		
	S/T	0.81	0.73	0.59	0.45	0.45	1.00	0.73	0.60	0.45	0.45	1.00	0.76	0.62	0.48	0.48	1.00	0.78	0.64	0.50	0.50	1.00	1.00	0.66	0.52	1.00	1.00	0.72	0.57		
	ΔT	22.66	20.83	17.42	13.89	13.84	22.61	20.78	17.37	13.84	13.84	22.86	21.04	17.63	14.10	14.10	22.59	20.76	17.35	13.82	13.82	22.34	20.52	17.11	13.58	23.49	21.66	18.25	14.72		
	kW	1.69	1.69	1.68	1.70	1.70	1.90	1.89	1.89	1.91	1.91	2.13	2.13	2.12	2.14	2.14	2.38	2.38	2.38	2.39	2.39	2.66	2.66	2.66	2.67	2.99	2.99	2.99	3.01		
	Amps	6.42	6.41	6.40	6.47	6.47	7.33	7.32	7.31	7.38	7.38	8.34	8.34	8.32	8.39	8.39	9.44	9.43	9.42	9.49	9.49	10.67	10.66	10.65	10.71	12.11	12.10	12.08	12.15		
	Hi PR	250	251	253	258	258	290	291	292	297	297	331	332	333	338	338	375	376	378	382	382	422	423	425	429	473	474	476	480		
	Lo PR	128	130	133	138	138	136	138	141	146	146	143	144	147	153	153	148	150	153	159	159	154	156	159	164	161	163	166	171		
1050	MBh	31.8	32.2	33.1	34.5	34.5	31.5	31.9	32.8	34.2	34.2	30.7	31.1	32.0	33.4	33.4	29.3	29.7	30.6	32.1	32.1	27.6	28.0	29.0	30.4	26.1	26.5	27.4	28.8		
	S/T	0.84	0.77	0.63	0.49	0.49	1.00	0.77	0.64	0.49	0.49	1.00	0.80	0.66	0.52	0.52	1.00	0.82	0.68	0.54	0.54	1.00	1.00	0.70	0.56	1.00	1.00	0.76	0.61		
	ΔT	21.53	19.70	16.30	12.76	12.71	21.48	19.65	16.25	12.71	12.71	21.74	19.91	16.50	12.97	12.97	21.46	19.64	16.23	12.69	12.69	21.22	19.39	15.98	12.45	22.36	20.54	17.13	13.59		
	kW	1.70	1.70	1.69	1.71	1.71	1.91	1.91	1.90	1.92	1.92	2.14	2.14	2.14	2.15	2.15	2.39	2.39	2.39	2.40	2.40	2.67	2.67	2.67	2.69	3.01	3.00	3.00	3.02		
	Amps	6.47	6.46	6.45	6.52	6.52	7.38	7.37	7.36	7.43	7.43	8.39	8.39	8.37	8.44	8.44	9.49	9.48	9.47	9.54	9.54	10.72	10.71	10.69	10.76	12.15	12.15	12.13	12.20		
	Hi PR	253	254	256	260	260	292	293	295	299	299	333	334	336	340	340	377	378	380	384	384	425	426	428	432	476	477	478	483		
	Lo PR	131	132	136	141	141	139	140	143	149	149	145	147	150	155	155	151	153	156	161	161	157	158	161	167	164	165	168	174		

IDB = Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling, 8-12 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 8-12°F @ the compressor suction access fitting connection.

Shaded area reflects AHRI (TVA) conditions.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80		MBh	30.8	31.3	32.2	33.6	30.5	31.0	31.9	33.3	29.7	30.2	31.1	32.5	28.4	28.8	29.7	31.1	26.7	27.1	28.0	29.4	25.1	25.6	26.5	27.9	25.1	25.6	26.5	27.9	
		S/T	1.00	0.78	0.64	0.49	1.00	0.78	0.65	0.50	1.00	0.81	0.67	0.53	1.00	1.00	0.69	0.55	1.00	1.00	0.71	0.57	1.00	1.00	0.76	0.62	1.00	1.00	0.76	0.62	
		ΔT	28.09	26.27	22.86	19.32	28.04	26.22	22.81	19.27	28.30	26.47	23.06	19.53	28.02	26.20	22.79	19.26	27.78	25.95	22.54	19.01	28.92	27.10	23.69	20.16	28.92	27.10	23.69	20.16	
	770	kW	1.67	1.67	1.67	1.69	1.88	1.88	1.88	1.89	2.12	2.12	2.11	2.13	2.37	2.37	2.36	2.38	2.65	2.65	2.65	2.66	2.98	2.98	2.98	2.99	2.98	2.98	2.98	2.99	
		Amps	6.37	6.36	6.34	6.41	7.28	7.27	7.25	7.32	8.29	8.28	8.27	8.34	9.39	9.38	9.36	9.43	10.61	10.61	10.59	10.66	12.05	12.04	12.03	12.10	12.05	12.04	12.03	12.10	
		Hi PR	248	249	251	255	287	288	290	295	328	329	331	336	373	374	375	380	420	421	423	427	471	472	474	478	471	472	474	478	
	Lo PR	127	128	131	137	134	136	139	144	141	143	146	151	147	148	151	157	152	154	157	162	159	161	164	169	159	161	164	169		
910		MBh	31.3	31.7	32.7	34.1	31.0	31.5	32.4	33.8	30.2	30.7	31.6	33.0	28.8	29.3	30.2	31.6	27.2	27.6	28.5	29.9	25.6	26.1	27.0	28.4	25.6	26.1	27.0	28.4	
		S/T	1.00	0.86	0.72	0.57	1.00	0.86	0.72	0.58	1.00	0.89	0.75	0.60	1.00	1.00	0.77	0.62	1.00	1.00	0.79	0.65	1.00	1.00	0.84	0.70	1.00	1.00	0.84	0.70	
		ΔT	26.70	24.87	21.46	17.93	26.65	24.82	21.41	17.88	26.91	25.08	21.67	18.14	26.63	24.80	21.40	17.86	26.39	24.56	21.15	17.62	27.53	25.70	22.29	18.76	27.53	25.70	22.29	18.76	
		kW	1.69	1.69	1.68	1.70	1.90	1.90	1.89	1.91	2.13	2.13	2.13	2.14	2.38	2.38	2.38	2.39	2.66	2.66	2.66	2.68	3.00	2.99	2.99	3.01	3.00	2.99	2.99	3.01	
		Amps	6.43	6.42	6.40	6.47	7.34	7.33	7.31	7.38	8.35	8.34	8.33	8.40	9.45	9.44	9.42	9.49	10.67	10.67	10.65	10.72	12.11	12.10	12.09	12.16	12.11	12.10	12.09	12.16	
		Hi PR	251	252	254	258	290	291	293	297	331	332	334	338	375	376	378	382	423	424	426	430	474	475	476	481	474	475	476	481	
	Lo PR	129	130	134	139	137	138	141	147	143	145	148	153	149	150	154	159	155	156	159	165	162	163	166	172	162	163	166	172		
1050		MBh	31.9	32.3	33.3	34.7	31.6	32.1	33.0	34.4	30.8	31.3	32.2	33.6	29.5	29.9	30.8	32.2	27.8	28.2	29.1	30.5	26.2	26.7	27.6	29.0	26.2	26.7	27.6	29.0	
		S/T	1.00	0.89	0.76	0.61	1.00	0.90	0.76	0.62	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.69	1.00	1.00	0.84	0.74	1.00	1.00	0.84	0.74	
		ΔT	25.57	23.75	20.34	16.81	25.52	23.70	20.29	16.76	25.78	23.95	20.54	17.01	25.50	23.68	20.27	16.74	25.26	23.43	20.03	16.49	26.40	24.58	21.17	17.64	26.40	24.58	21.17	17.64	
		kW	1.70	1.70	1.69	1.71	1.91	1.91	1.90	1.92	2.14	2.14	2.14	2.15	2.39	2.39	2.39	2.40	2.68	2.67	2.67	2.69	3.01	3.01	3.00	3.02	3.01	3.01	3.00	3.02	
		Amps	6.47	6.47	6.45	6.52	7.38	7.38	7.36	7.43	8.40	8.39	8.37	8.44	9.49	9.49	9.47	9.54	10.72	10.71	10.70	10.77	12.16	12.15	12.14	12.21	12.16	12.15	12.14	12.21	
		Hi PR	253	254	256	261	293	294	295	300	334	335	336	341	378	379	380	385	425	426	428	432	476	477	479	483	476	477	479	483	
	Lo PR	131	133	136	141	129	141	144	149	146	147	151	156	151	153	156	162	157	159	162	167	164	166	169	174	164	166	169	174		

770	MBh	31.3	31.8	32.7	34.1	31.1	31.5	32.4	33.8	30.3	30.7	31.6	33.0	28.9	29.3	30.2	31.6	27.2	27.6	28.5	29.9	25.6	26.1	27.0	28.4	25.6	26.1	27.0	28.4	25.6	26.1	27.0	28.4
	S/T	1.00	0.88	0.74	0.60	1.00	1.00	0.75	0.60	1.00	1.00	0.77	0.63	1.00	1.00	0.79	0.65	1.00	1.00	0.71	0.57	1.00	1.00	0.76	0.62	1.00	1.00	0.76	0.62	1.00	1.00	0.76	0.62
	ΔT	31.68	29.85	26.44	22.91	31.63	29.80	26.39	22.86	31.88	30.06	26.65	23.12	31.61	29.78	26.37	22.84	31.37	29.54	26.13	22.60	32.51	30.68	27.27	23.74	32.51	30.68	27.27	23.74	32.51	30.68	27.27	23.74
	kW	1.68	1.68	1.67	1.69	1.89	1.89	1.88	1.90	2.12	2.12	2.12	2.13	2.37	2.37	2.37	2.38	2.66	2.65	2.65	2.67	2.99	2.98	2.98	3.00	2.99	2.98	2.98	3.00	2.99	3.01	3.00	3.01
	Amps	6.38	6.38	6.36	6.43	7.29	7.29	7.27	7.34	8.31	8.30	8.28	8.35	9.40	9.40	9.38	9.45	10.63	10.62	10.61	10.68	12.07	12.06	12.05	12.12	12.07	12.06	12.05	12.12	12.07	12.06	12.05	12.12
	Lo PR	249	250	252	257	289	290	291	296	330	331	332	337	374	375	377	381	421	422	424	428	472	473	475	479	472	473	475	479	472	473	475	479
910	MBh	31.8	32.3	33.2	34.6	31.5	32.0	32.9	34.3	30.7	31.2	32.1	33.5	29.4	29.8	30.7	32.1	27.7	28.1	29.0	30.4	26.1	26.6	27.5	28.9	26.1	26.6	27.5	28.9	26.1	26.6	27.5	28.9
	S/T	1.00	0.96	0.82	0.68	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.75	0.61	1.00	1.00	0.80	1.00	1.00	0.80	1.00	1.00	0.80	1.00	1.00	0.80
	ΔT	30.28	28.46	25.05	21.52	30.23	28.41	25.00	21.47	30.49	28.67	25.26	21.72	30.22	28.39	24.98	21.45	29.97	28.15	24.74	21.20	31.12	29.29	25.88	22.35	31.12	29.29	25.88	22.35	31.12	29.29	25.88	22.35
	kW	1.69	1.69	1.69	1.70	1.90	1.90	1.90	1.91	2.13	2.13	2.13	2.15	2.39	2.39	2.38	2.40	2.67	2.67	2.66	2.68	3.00	3.00	3.00	3.01	3.00	3.00	3.00	3.01	3.00	3.00	3.01	3.01
	Amps	6.44	6.44	6.42	6.49	7.35	7.35	7.33	7.40	8.37	8.36	8.34	8.41	9.46	9.46	9.44	9.51	10.69	10.68	10.67	10.74	12.13	12.12	12.11	12.18	12.13	12.12	12.11	12.18	12.13	12.12	12.11	12.18
	Lo PR	252	253	255	259	291	292	294	298	332	333	335	339	376	377	379	383	424	425	427	431	475	476	478	482	475	476	478	482	475	476	478	482
1050	MBh	32.4	32.9	33.8	35.2	32.2	32.6	33.5	34.9	31.4	31.8	32.7	34.1	30.0	30.4	31.3	32.7	28.3	28.7	29.6	31.0	26.7	27.2	28.1	29.5	26.7	27.2	28.1	29.5	26.7	27.2	28.1	29.5
	S/T	1.00	1.00	0.86	0.71	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.75	1.00	1.00	0.91	0.77	1.00	1.00	0.79	0.65	1.00	1.00	0.84	1.00	1.00	0.84	1.00	1.00	0.84	1.00	1.00	0.84
	ΔT	29.16	27.33	23.92	20.39	29.11	27.28	23.87	20.34	29.37	27.54	24.13	20.60	29.09	27.26	23.85	20.32	28.85	27.02	23.61	20.08	29.99	28.16	24.75	21.22	29.99	28.16	24.75	21.22	29.99	28.16	24.75	21.22
	kW	1.70	1.70	1.70	1.71	1.91	1.91	1.91	1.92	2.15	2.14	2.14	2.16	2.40	2.40	2.39	2.41	2.68	2.68	2.67	2.69	3.01	3.01	3.01	3.02	3.01	3.01	3.01	3.02	3.01	3.01	3.01	3.02
	Amps	6.49	6.48	6.47	6.54	7.40	7.39	7.38	7.45	8.41	8.41	8.39	8.46	9.51	9.50	9.49	9.56	10.74	10.73	10.72	10.78	12.18	12.17	12.15	12.22	12.18	12.17	12.15	12.22	12.18	12.17	12.15	12.22
	Lo PR	255	256	257	262	294	295	296	301	335	336	338	342	379	380	382	386	426	428	429	434	477	478	480	484	477	478	480	484	477	478	480	484

IDB = Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling, 8-12 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 8-12°F @ the compressor suction access fitting connection.



		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
1400	MBh	46.80	47.46	48.86	-	46.38	47.04	48.44	-	45.16	45.82	47.22	-	43.06	43.72	45.12	-	40.49	41.15	42.55	-	40.49	41.15	42.55	-	38.14	38.80	40.20	-								
	S/T	0.62	0.54	0.40	-	0.63	0.55	0.41	-	0.65	0.57	0.44	-	0.67	0.59	0.46	-	1.00	0.62	0.48	-	1.00	0.62	0.48	-	1.00	0.67	0.53	-								
	ΔT	19.52	17.71	14.34	-	19.47	17.66	14.29	-	19.72	17.92	14.55	-	19.45	17.64	14.27	-	19.21	17.40	14.03	-	19.21	17.40	14.03	-	20.34	18.53	15.16	-								
	kW	2.95	2.95	2.94	-	3.31	3.30	3.30	-	3.70	3.70	3.69	-	4.13	4.13	4.12	-	4.61	4.61	4.60	-	4.61	4.61	4.60	-	5.17	5.17	5.16	-								
	Amps	10.75	10.74	10.71	-	12.29	12.28	12.25	-	14.01	14.00	13.98	-	15.88	15.87	15.84	-	17.96	17.95	17.92	-	17.96	17.95	17.92	-	20.41	20.39	20.37	-								
	Hi PR	271.97	273.15	275.06	-	314.89	316.07	317.98	-	359.85	361.03	362.94	-	408.26	409.44	411.35	-	460.46	461.64	463.55	-	460.46	461.64	463.55	-	516.16	517.34	519.25	-								
70	Lo PR	122.51	124.02	127.14	-	129.96	131.47	134.59	-	136.49	138.00	141.12	-	142.01	143.52	146.64	-	147.42	148.94	152.06	-	147.42	148.94	152.06	-	154.21	155.72	158.84	-								
	MBh	47.41	48.08	49.47	-	47.00	47.66	49.05	-	45.77	46.43	47.83	-	43.67	44.33	45.73	-	41.10	41.76	43.16	-	41.10	41.76	43.16	-	38.76	39.42	40.81	-								
	S/T	0.68	0.60	0.47	-	0.69	0.61	0.47	-	0.71	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	1.00	0.73	0.59	-								
	ΔT	18.43	16.62	13.25	-	18.38	16.57	13.20	-	18.63	16.83	13.46	-	18.36	16.55	13.18	-	18.12	16.31	12.94	-	18.12	16.31	12.94	-	19.25	17.44	14.07	-								
	kW	2.97	2.97	2.96	-	3.32	3.32	3.31	-	3.72	3.72	3.71	-	4.15	4.15	4.14	-	4.63	4.62	4.62	-	4.63	4.62	4.62	-	5.19	5.19	5.18	-								
	Amps	10.83	10.82	10.79	-	12.37	12.36	12.33	-	14.09	14.08	14.06	-	15.96	15.95	15.92	-	18.04	18.03	18.00	-	18.04	18.03	18.00	-	20.49	20.47	20.45	-								
1800	Hi PR	274.28	275.46	277.37	-	317.20	318.38	320.29	-	362.16	363.34	365.25	-	410.57	411.75	413.66	-	462.77	463.95	465.86	-	462.77	463.95	465.86	-	518.47	519.65	521.56	-								
	Lo PR	124.31	125.82	128.94	-	131.76	133.28	136.39	-	138.29	139.80	142.92	-	143.81	145.32	148.44	-	149.23	150.74	153.86	-	149.23	150.74	153.86	-	156.01	157.52	160.64	-								
	MBh	48.15	48.81	50.21	-	47.73	48.39	49.79	-	46.51	47.17	48.57	-	44.41	45.07	46.47	-	41.84	42.50	43.90	-	41.84	42.50	43.90	-	39.49	40.15	41.55	-								
	S/T	0.72	0.64	0.50	-	0.72	0.65	0.51	-	0.75	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.71	0.57	-	1.00	0.77	0.63	-								
	ΔT	17.51	15.70	12.33	-	17.46	15.65	12.28	-	17.71	15.91	12.54	-	17.44	15.64	12.27	-	17.20	15.40	12.03	-	17.20	15.40	12.03	-	18.33	16.53	13.16	-								
	kW	2.98	2.98	2.98	-	3.34	3.34	3.33	-	3.74	3.73	3.73	-	4.16	4.16	4.16	-	4.64	4.64	4.63	-	4.64	4.64	4.63	-	5.21	5.20	5.20	-								
75	Amps	10.90	10.88	10.86	-	12.44	12.43	12.40	-	14.16	14.15	14.12	-	16.03	16.01	15.99	-	18.11	18.10	18.07	-	18.11	18.10	18.07	-	20.55	20.54	20.51	-								
	Hi PR	276.52	277.70	279.61	-	319.44	320.62	322.53	-	364.40	365.58	367.49	-	412.81	413.99	415.90	-	465.01	466.19	468.10	-	465.01	466.19	468.10	-	520.71	521.89	523.81	-								
	Lo PR	126.30	127.82	130.94	-	133.76	135.27	138.39	-	140.28	141.80	144.92	-	145.80	147.32	150.44	-	151.22	152.73	155.85	-	151.22	152.73	155.85	-	158.00	159.52	162.64	-								
	MBh	46.83	47.49	48.89	51.02	46.41	47.07	48.47	50.60	45.19	45.85	47.25	49.38	43.08	43.74	45.14	47.28	40.51	41.17	42.57	44.71	40.51	41.17	42.57	44.71	38.17	38.83	40.23	42.36								
	S/T	0.75	0.68	0.54	0.39	0.76	0.68	0.54	0.40	1.00	0.71	0.57	0.42	1.00	0.73	0.59	0.44	1.00	0.75	0.61	0.46	1.00	0.75	0.61	0.46	1.00	1.00	0.66	0.52								
	ΔT	23.49	21.68	18.31	14.82	23.44	21.63	18.26	14.77	23.69	21.89	18.52	15.02	23.42	21.61	18.24	14.75	23.18	21.37	18.00	14.51	23.18	21.37	18.00	14.51	24.31	22.50	19.13	15.64								
1400	kW	2.95	2.94	2.94	2.97	3.30	3.30	3.29	3.32	3.70	3.70	3.69	3.72	4.13	4.12	4.12	4.15	4.61	4.60	4.60	4.63	4.61	4.60	4.60	4.63	5.17	5.17	5.16	5.19								
	Amps	10.74	10.73	10.70	10.82	12.28	12.27	12.24	12.36	14.00	13.99	13.97	14.08	15.87	15.86	15.83	15.95	17.95	17.94	17.91	18.03	17.95	17.94	17.91	18.03	20.40	20.38	20.36	20.47								
	Hi PR	272.21	273.39	275.30	280.04	315.13	316.31	318.22	322.96	360.09	361.27	363.18	367.92	408.50	409.68	411.59	416.33	460.70	461.88	463.79	468.53	460.70	461.88	463.79	468.53	516.40	517.58	519.49	524.23								
	Lo PR	122.54	124.05	127.17	132.39	129.99	131.50	134.62	139.84	136.52	138.03	141.15	146.37	142.04	143.55	146.67	151.89	147.45	148.97	152.09	157.30	147.45	148.97	152.09	157.30	154.24	155.75	158.87	164.09								
	MBh	47.44	48.10	49.50	51.64	47.02	47.68	49.08	51.22	45.80	46.46	47.86	50.00	43.70	44.36	45.76	47.89	41.13	41.79	43.19	45.32	41.13	41.79	43.19	45.32	38.78	39.44	40.84	42.98								
	S/T	0.81	0.74	0.60	0.45	0.82	0.74	0.60	0.46	1.00	0.77	0.63	0.48	1.00	0.79	0.65	0.50	1.00	0.81	0.67	0.53	1.00	0.81	0.67	0.53	1.00	1.00	0.73	0.58								
75	ΔT	22.40	20.59	17.22	13.73	22.35	20.54	17.17	13.68	22.60	20.80	17.43	13.93	22.33	20.52	17.15	13.66	22.09	20.28	16.91	13.42	22.09	20.28	16.91	13.42	23.22	21.41	18.04	14.55								
	kW	2.97	2.96	2.96	2.98	3.32	3.32	3.31	3.34	3.72	3.71	3.71	3.74	4.15	4.14	4.14	4.16	4.63	4.62	4.62	4.64	4.63	4.62	4.62	4.64	5.19	5.18	5.18	5.21								
	Amps	10.82	10.81	10.78	10.90	12.36	12.35	12.32	12.44	14.08	14.07	14.05	14.16	15.95	15.94	15.91	16.03	18.03	18.02	17.99	18.11	18.03	18.02	17.99	18.11	20.48	20.46	20.44	20.55								
	Hi PR	274.52	275.70	277.61	282.35	317.44	318.62	320.53	325.27	362.40	363.58	365.49	370.23	410.81	411.99	413.90	418.64	463.01	464.19	466.10	470.84	463.01	464.19	466.10	470.84	518.71	519.89	521.80	526.54								
	Lo PR	124.34	125.85	128.97	134.19	131.79	133.30	136.42	141.64	138.32	139.83	142.95	148.17	143.84	145.35	148.47	153.69	149.25	150.77	153.89	159.11	156.04	157.55	160.67	165.89	156.04	157.55	160.67	165.89								
	MBh	48.18	48.84	50.24	52.37	47.76	48.42	49.82	51.96	46.54	47.20	48.60	50.73	44.44	45.10	46.50	48.63	41.87	42.53	43.93	46.06	39.52	40.18	41.58	43.72	39.52	40.18	41.58	43.72								
1800	S/T	0.85	0.77	0.63	0.49	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.52	1.00	0.82	0.68	0.54	1.00	0.85	0.71	0.56	1.00	0.85	0.71	0.56	1.00	1.00	0.76	0.61								
	ΔT	21.48	19.67	16.30	12.81	21.43	19.62	16.25	12.76	21.68	19.88	16.51	13.02	21.41	19.61	16.23	12.74	21.17	19.36	15.99	12.50	22.30	20.49	17.12	22.30	20.49	17.12	13.63									
	kW	2.98	2.98	2.97</																																	

		65						75						85						95						105						115					
		OUTDOOR AMBIENT TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
		ENTERING INDOOR WET BULB TEMPERATURE																																			
80	MbH	47.1	47.7	49.1	51.3	46.7	47.3	48.7	50.8	45.4	46.1	47.5	49.6	43.3	44.0	45.4	47.5	40.8	41.4	42.8	45.0	38.4	39.1	40.5	42.6												
	S/T	1.00	0.80	0.66	0.52	1.00	0.81	0.67	0.52	1.00	0.84	0.70	0.55	1.00	0.86	0.72	0.57	1.00	1.00	0.74	0.59	1.00	1.00	0.79	0.65												
	ΔT	27.48	25.68	22.31	18.82	27.43	25.63	22.26	18.77	27.69	25.88	22.51	19.02	27.41	25.61	22.24	18.75	27.17	25.37	22.00	18.51	28.30	26.50	23.13	19.64												
	kW	2.95	2.95	2.94	2.97	3.30	3.30	3.30	3.32	3.32	3.70	3.70	3.69	3.72	4.13	4.13	4.12	4.15	4.61	4.61	4.60	4.63	5.17	5.17	5.16	5.19											
	Amps	10.75	10.73	10.71	10.83	12.29	12.28	12.25	12.37	14.01	14.00	13.97	14.09	15.88	15.86	15.84	15.96	17.96	17.95	17.92	18.04	20.40	20.39	20.36	20.48												
	Hi PR	273	274	276	281	316	317	319	323	361	362	364	368	409	410	412	417	461	462	464	469	517	518	520	525												
	Lo PR	123	125	128	133	131	132	135	140	137	139	142	147	143	144	147	152	148	150	153	158	155	156	159	165												
1600	MbH	47.7	48.3	49.7	51.9	47.3	47.9	49.3	51.5	46.0	46.7	48.1	50.2	43.9	44.6	46.0	48.1	41.4	42.0	43.4	45.6	39.0	39.7	41.1	43.2												
	S/T	1.00	0.87	0.73	0.58	1.00	0.87	0.73	0.59	1.00	0.90	0.76	0.61	1.00	1.00	0.78	0.63	1.00	1.00	0.80	0.65	1.00	1.00	0.85	0.71												
	ΔT	26.39	24.59	21.22	17.72	26.34	24.54	21.17	17.68	26.60	24.79	21.42	17.93	26.32	24.52	21.15	17.66	26.08	24.28	20.91	17.42	27.21	25.41	22.04	18.55												
	kW	2.97	2.97	2.96	2.99	3.32	3.32	3.31	3.34	3.72	3.72	3.71	3.74	4.15	4.15	4.14	4.17	4.63	4.62	4.62	4.65	5.19	5.19	5.18	5.21												
	Amps	10.83	10.81	10.79	10.91	12.37	12.36	12.33	12.45	14.09	14.08	14.05	14.17	15.96	15.94	15.92	16.04	18.04	18.03	18.00	18.12	20.48	20.47	20.44	20.56												
	Hi PR	275	276	278	283	318	319	321	326	363	364	366	371	411	412	414	419	464	465	467	471	519	520	522	527												
	Lo PR	125	126	130	135	132	134	137	142	139	140	143	149	144	146	149	154	150	151	154	160	157	158	161	166												
1800	MbH	48.4	49.1	50.5	52.6	48.0	48.7	50.1	52.2	46.8	47.4	48.8	51.0	44.7	45.3	46.7	48.9	42.1	42.8	44.2	46.3	39.8	40.4	41.8	44.0												
	S/T	1.00	0.90	0.76	0.61	1.00	0.91	0.77	0.62	1.00	0.93	0.79	0.65	1.00	1.00	0.81	0.67	1.00	1.00	0.84	0.69	1.00	1.00	0.89	0.74												
	ΔT	25.47	23.67	20.30	16.81	25.42	23.62	20.25	16.76	25.68	23.87	20.50	17.01	25.41	23.60	20.23	16.74	25.16	23.36	19.99	16.50	26.29	24.49	21.12	17.63												
	kW	2.98	2.98	2.97	3.00	3.34	3.34	3.33	3.36	3.73	3.73	3.73	3.75	4.16	4.16	4.15	4.18	4.64	4.64	4.63	4.66	5.20	5.20	5.20	5.22												
	Amps	10.89	10.88	10.85	10.97	12.44	12.42	12.40	12.52	14.16	14.15	14.12	14.24	16.02	16.01	15.99	16.10	18.11	18.09	18.07	18.19	20.55	20.54	20.51	20.63												
	Hi PR	277	278	280	285	320	321	323	328	365	366	368	373	414	415	417	421	466	467	469	474	521	523	525	529												
	Lo PR	127	128	132	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	168												

85	1400	MBh	47.9	48.5	49.9	52.1	47.4	48.1	49.5	51.6	46.2	46.9	48.3	50.4	44.1	44.8	46.2	48.3	41.5	42.2	43.6	45.7	39.2	39.9	41.3	43.4
		S/T	1.00	0.91	0.77	0.62	1.00	0.91	0.77	0.63	1.00	1.00	1.00	0.80	0.65	1.00	1.00	0.82	0.67	1.00	1.00	0.84	0.70	1.00	1.00	0.75
		ΔT	31.03	29.22	25.85	22.36	30.98	29.17	25.80	22.31	31.23	29.43	26.06	22.56	30.96	29.15	25.78	22.29	30.72	28.91	25.54	22.05	31.85	30.04	26.67	23.18
		kW	2.96	2.95	2.95	2.97	3.31	3.31	3.30	3.33	3.71	3.70	3.70	3.73	4.14	4.13	4.13	4.15	4.62	4.61	4.61	4.63	5.18	5.17	5.17	5.20
		Amps	10.78	10.76	10.74	10.86	12.32	12.31	12.28	12.40	14.04	14.03	14.00	14.12	15.91	15.89	15.87	15.99	17.99	17.98	17.95	18.07	20.43	20.42	20.39	20.51
	Hi PR	274	275	277	282	317	318	320	325	362	363	365	370	410	411	413	418	462	464	466	470	518	519	521	526	
	Lo PR	125	126	130	135	132	134	137	142	139	140	144	149	144	146	149	154	150	151	154	160	157	158	161	166	
	1600	MBh	48.5	49.1	50.5	52.7	48.1	48.7	50.1	52.2	46.8	47.5	48.9	51.0	44.7	45.4	46.8	48.9	42.2	42.8	44.2	46.4	39.8	40.5	41.9	44.0
		S/T	1.00	0.97	0.83	0.68	1.00	1.00	0.84	0.69	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81
		ΔT	29.94	28.13	24.76	21.27	29.89	28.08	24.71	21.22	30.14	28.33	24.96	21.47	29.87	28.06	24.69	21.20	29.63	27.82	24.45	20.96	30.76	28.95	25.58	22.09
kW		2.97	2.97	2.97	2.99	3.33	3.33	3.32	3.35	3.73	3.72	3.72	3.74	4.15	4.15	4.15	4.17	4.63	4.63	4.63	4.65	5.20	5.19	5.19	5.21	
Amps		10.86	10.84	10.82	10.94	12.40	12.39	12.36	12.48	14.12	14.11	14.08	14.20	15.99	15.97	15.95	16.07	18.07	18.06	18.03	18.15	20.51	20.50	20.47	20.59	
1800	Hi PR	276	277	279	284	319	320	322	327	364	365	367	372	413	414	416	420	465	466	468	473	520	522	524	528	
	Lo PR	127	128	131	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	161	158	160	163	168	
	MBh	49.2	49.9	51.3	53.4	48.8	49.5	50.9	53.0	47.6	48.2	49.6	51.8	45.5	46.1	47.5	49.7	42.9	43.6	45.0	47.1	40.6	41.2	42.6	44.7	
	S/T	1.00	1.00	0.86	0.72	1.00	1.00	0.87	0.72	1.00	1.00	0.90	0.75	1.00	1.00	0.92	0.77	1.00	1.00	0.94	0.79	1.00	1.00	1.00	0.85	
	ΔT	29.02	27.21	23.84	20.35	28.97	27.16	23.79	20.30	29.22	27.42	24.05	20.55	28.95	27.14	23.77	20.28	28.71	26.90	23.53	20.04	29.84	28.03	24.66	21.17	
85	1600	kW	2.99	2.99	2.98	3.01	3.35	3.34	3.34	3.36	3.74	3.74	3.73	3.76	4.17	4.17	4.16	4.19	4.65	4.65	4.64	4.67	5.21	5.21	5.20	5.23
		Amps	10.92	10.91	10.88	11.00	12.47	12.45	12.43	12.55	14.19	14.18	14.15	14.27	16.05	16.04	16.01	16.13	18.14	18.12	18.10	18.22	20.58	20.57	20.54	20.66
		Hi PR	279	280	282	286	321	323	325	329	366	368	370	374	415	416	418	423	467	468	470	475	523	524	526	531
		Lo PR	129	130	133	139	136	138	141	146	143	144	147	153	148	150	153	158	154	155	158	163	160	162	165	170

DB = Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction access fittings.  
Design Subcooling, 10-13 °F @ the liquid access fitting connection AHRI 95 test conditions, Design Superheat 10-14 °F @ the compressor suction access fitting connection.



		OUTDOOR AMBIENT TEMPERATURE															115																			
		65					75					85					95					105														
IDB	AIRFLOW	59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71	
70	980	MBh	33.6	34.1	35.1	-	33.3	33.8	34.8	-	-	32.5	32.9	33.9	-	-	31.0	31.4	32.4	-	-	29.1	29.6	30.6	-	-	27.4	27.9	28.9	-	-	25.1	25.6	26.6	-	-
		S/T	0.64	0.56	0.41	-	0.64	0.56	0.42	-	-	0.67	0.59	0.45	-	-	1.00	0.61	0.47	-	-	1.00	0.63	0.49	-	-	1.00	0.69	0.55	-	-	1.00	0.71	0.57	-	-
		ΔT	18.83	17.09	13.84	-	18.79	17.05	13.79	-	-	19.03	17.29	14.04	-	-	18.77	17.03	13.78	-	-	18.54	16.79	13.54	-	-	19.63	17.89	14.63	-	-	18.38	16.63	13.38	-	-
		kW	1.86	1.85	1.85	-	2.08	2.08	2.07	-	-	2.33	2.33	2.32	-	-	2.60	2.60	2.59	-	-	2.90	2.90	2.89	-	-	3.25	3.25	3.25	-	-	3.50	3.50	3.50	-	-
		Amps	6.76	6.75	6.74	-	7.73	7.72	7.71	-	-	8.81	8.81	8.79	-	-	9.99	9.98	9.96	-	-	11.30	11.29	11.27	-	-	12.83	12.83	12.81	-	-	14.33	14.32	14.30	-	-
		Hi PR	260	261	263	-	301	302	304	-	-	344	345	347	-	-	390	391	393	-	-	440	441	443	-	-	493	495	496	-	-	540	541	543	-	-
Lo PR	126	127	131	-	134	135	138	-	-	140	142	145	-	-	146	148	151	-	-	152	153	156	-	-	159	160	163	-	-	162	164	167	-	-		
70	1120	MBh	34.1	34.6	35.6	-	33.8	34.3	35.3	-	-	32.9	33.4	34.4	-	-	31.4	31.9	32.9	-	-	29.6	30.0	31.0	-	-	27.9	28.3	29.3	-	-	25.6	26.0	27.0	-	-
		S/T	0.70	0.62	0.48	-	0.71	0.63	0.48	-	-	0.73	0.65	0.51	-	-	1.00	0.67	0.53	-	-	1.00	0.70	0.55	-	-	1.00	0.75	0.61	-	-	1.00	0.73	0.59	-	-
		ΔT	17.78	16.04	12.79	-	17.73	15.99	12.74	-	-	17.98	16.24	12.99	-	-	17.72	15.97	12.72	-	-	17.48	15.74	12.49	-	-	18.57	16.83	13.58	-	-	17.23	15.48	12.23	-	-
		kW	1.87	1.87	1.86	-	2.09	2.09	2.08	-	-	2.34	2.34	2.33	-	-	2.61	2.61	2.60	-	-	2.91	2.91	2.91	-	-	3.26	3.26	3.26	-	-	3.51	3.51	3.51	-	-
		Amps	6.81	6.80	6.79	-	7.78	7.77	7.76	-	-	8.87	8.86	8.84	-	-	10.04	10.03	10.01	-	-	11.35	11.34	11.32	-	-	12.89	12.88	12.86	-	-	14.39	14.38	14.36	-	-
		Hi PR	262	263	265	-	303	304	306	-	-	346	347	349	-	-	393	394	395	-	-	442	444	445	-	-	496	497	499	-	-	542	544	545	-	-
Lo PR	128	129	133	-	135	137	140	-	-	142	144	147	-	-	148	149	153	-	-	153	155	158	-	-	160	162	165	-	-	162	164	167	-	-		
	1260	MBh	34.6	35.1	36.1	-	34.3	34.8	35.8	-	-	33.4	33.9	34.9	-	-	31.9	32.4	33.4	-	-	30.1	30.6	31.6	-	-	28.4	28.9	29.9	-	-	25.9	26.4	27.4	-	-
		S/T	0.74	0.66	0.51	-	0.74	0.66	0.52	-	-	1.00	0.69	0.55	-	-	1.00	0.71	0.57	-	-	1.00	0.73	0.59	-	-	1.00	1.00	0.64	-	-	1.00	0.75	0.61	-	-
		ΔT	16.90	15.15	11.90	-	16.85	15.11	11.85	-	-	17.09	15.35	12.10	-	-	16.83	15.09	11.84	-	-	16.60	14.86	11.60	-	-	17.69	15.95	12.69	-	-	16.35	14.60	11.35	-	-
		kW	1.88	1.88	1.87	-	2.10	2.10	2.09	-	-	2.35	2.35	2.34	-	-	2.62	2.62	2.61	-	-	2.92	2.92	2.91	-	-	3.27	3.27	3.27	-	-	3.52	3.52	3.52	-	-
		Amps	6.85	6.85	6.83	-	7.82	7.82	7.80	-	-	8.91	8.90	8.88	-	-	10.08	10.07	10.06	-	-	11.39	11.38	11.37	-	-	12.93	12.92	12.90	-	-	14.43	14.42	14.40	-	-
		Hi PR	264	265	267	-	305	307	308	-	-	348	349	351	-	-	398	399	400	-	-	445	446	448	-	-	498	499	501	-	-	544	546	548	-	-
Lo PR	130	131	135	-	138	139	142	-	-	144	146	149	-	-	150	151	155	-	-	155	157	160	-	-	162	164	167	-	-	164	166	169	-	-		

980	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
	MBh	33.7	34.1	35.1	36.7	-	33.4	33.8	34.8	36.4	-	32.5	33.0	34.0	35.5	-	31.0	31.5	32.5	34.0	-	29.1	29.6	30.6	32.1	-	27.4	27.9	28.9	30.5	-
	S/T	0.77	0.69	0.55	0.40	-	1.00	0.70	0.56	0.41	-	1.00	0.73	0.58	0.43	-	1.00	0.75	0.60	0.45	-	1.00	0.77	0.63	0.48	-	1.00	1.00	0.68	0.53	-
	ΔT	22.66	20.92	17.67	14.30	-	22.62	20.87	17.62	14.25	-	22.86	21.12	17.87	14.50	-	22.60	20.86	17.60	14.24	-	22.37	20.62	17.37	14.00	-	23.46	21.71	18.46	15.09	-
	kW	1.85	1.85	1.85	1.87	-	2.08	2.08	2.07	2.09	-	2.33	2.32	2.32	2.34	-	2.60	2.59	2.59	2.61	-	2.90	2.90	2.89	2.91	-	3.25	3.25	3.25	3.26	-
	Amps	6.75	6.75	6.73	6.80	-	7.73	7.72	7.70	7.78	-	8.81	8.80	8.78	8.86	-	9.98	9.97	9.96	10.03	-	11.29	11.28	11.27	11.34	-	12.83	12.82	12.80	12.88	-
1120	Hi PR	260	261	263	268	-	301	302	304	309	-	344	345	347	352	-	391	392	393	398	-	440	442	443	448	-	494	495	497	501	-
	Lo PR	126	128	131	136	-	134	135	138	144	-	140	142	145	150	-	146	148	151	156	-	152	153	156	162	-	159	160	163	169	-
	MBh	34.11	34.6	35.6	37.1	-	33.8	34.3	35.3	36.8	-	32.9	33.4	34.4	35.9	-	31.4	<b>31.9</b>	32.9	34.4	-	29.6	30.0	31.1	32.6	-	27.9	28.4	29.4	30.9	-
	S/T	0.84	0.76	0.61	0.46	-	1.00	0.76	0.62	0.47	-	1.00	0.79	0.65	0.50	-	1.00	<b>0.81</b>	0.67	0.52	-	1.00	1.00	0.69	0.54	-	1.00	1.00	0.74	0.59	-
	ΔT	21.61	19.87	16.62	13.25	-	21.56	19.82	16.57	13.20	-	21.81	20.07	16.82	13.45	-	21.55	<b>19.80</b>	16.55	13.18	-	21.31	19.57	16.32	12.95	-	22.40	20.66	17.41	14.04	-
	kW	1.87	1.86	1.86	1.88	-	2.09	2.09	2.08	2.10	-	2.34	2.34	2.33	2.35	-	2.61	<b>2.61</b>	2.60	2.62	-	2.91	2.91	2.90	2.92	-	3.26	3.26	3.26	3.27	-
1260	Amps	6.80	6.80	6.78	6.85	-	7.78	7.77	7.75	7.83	-	8.86	8.85	8.83	8.91	-	10.03	<b>10.02</b>	10.01	10.08	-	11.34	11.33	11.32	11.39	-	12.88	12.87	12.85	12.93	-
	Hi PR	262	264	265	270	-	303	305	306	311	-	346	348	349	354	-	393	<b>394</b>	396	400	-	443	444	446	450	-	496	497	499	503	-
	Lo PR	128	129	133	138	-	135	137	140	146	-	142	144	147	152	-	148	<b>149</b>	153	158	-	153	155	158	164	-	160	162	165	171	-
	MBh	34.6	35.1	36.1	37.7	-	34.3	34.8	35.8	37.4	-	33.5	33.9	34.9	36.5	-	31.9	32.4	33.4	35.0	-	30.1	30.6	31.6	33.1	-	28.4	28.9	29.9	31.4	-
	S/T	0.87	0.79	0.65	0.50	-	1.00	0.80	0.66	0.51	-	1.00	0.83	0.68	0.53	-	1.00	0.85	0.70	0.55	-	1.00	1.00	0.73	0.58	-	1.00	1.00	0.78	0.63	-
	ΔT	20.73	18.98	15.73	12.36	-	20.68	18.94	15.68	12.32	-	20.92	19.18	15.93	12.56	-	20.66	18.92	15.67	12.30	-	20.43	18.69	15.43	12.06	-	21.52	19.78	16.52	13.15	-
1260	kW	1.88	1.87	1.87	1.89	-	2.10	2.10	2.09	2.11	-	2.35	2.35	2.34	2.36	-	2.62	2.62	2.61	2.63	-	2.92	2.92	2.91	2.93	-	3.27	3.27	3.27	3.28	-
	Amps	6.85	6.84	6.82	6.90	-	7.82	7.81	7.79	7.87	-	8.90	8.89	8.88	8.95	-	10.07	10.07	10.05	10.12	-	11.38	11.38	11.36	11.43	-	12.92	12.91	12.90	12.97	-
	Hi PR	265	266	268	272	-	306	307	309	313	-	349	350	352	356	-	395	396	398	402	-	445	446	448	452	-	498	499	501	506	-
	Lo PR	130	131	135	140	-	138	139	142	148	-	144	146	149	154	-	150	151	155	160	-	155	157	160	166	-	162	164	167	173	-

IDB = Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling, 8-12 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 8-12°F @ the compressor suction access fitting connection.

Shaded area reflects AHRI (TVA) conditions.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

KW = Total system power

		OUTDOOR AMBIENT TEMPERATURE															105															115														
		65					75					85					95					105					115																			
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75															
80	MbH	33.8	34.3	35.3	36.9	33.5	34.0	35.0	36.6	32.7	33.1	34.1	35.7	31.2	31.6	32.6	34.2	29.3	29.8	30.8	32.3	27.6	28.1	29.1	30.6	27.6	28.1	29.1	30.1	31.6	31.6															
	S/T	1.00	0.83	0.68	0.5	1.00	0.83	0.69	0.5	1.00	0.86	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.81	0.7	0.7																
	ΔT	26.52	24.78	21.53	18.2	26.47	24.73	21.48	18.1	26.72	24.98	21.72	18.4	26.45	24.71	21.46	18.1	26.22	24.48	21.23	17.9	27.31	25.57	22.32	18.9	27.31	25.57	22.32	18.9	17.9																
	kW	1.86	1.85	1.85	1.87	2.08	2.08	2.07	2.09	2.33	2.33	2.32	2.34	2.60	2.60	2.59	2.61	2.90	2.90	2.89	2.91	3.25	3.25	3.25	3.26	3.25	3.25	3.25	3.25	3.26	3.26															
	Amps	6.76	6.75	6.74	6.81	7.73	7.72	7.71	7.78	8.81	8.81	8.79	8.86	9.99	9.98	9.96	10.04	11.30	11.29	11.27	11.35	12.83	12.83	12.83	12.81	12.83	12.83	12.81	12.88	12.88																
	Hi PR	261	262	264	268	302	303	305	309	345	346	348	352	391	392	394	398	441	442	444	448	494	495	497	502	494	495	497	497	502	502															
1120	Lo PR	127	128	131	137	134	136	139	144	141	142	146	151	147	148	151	157	152	154	157	162	159	161	164	169	159	161	164	164	169	169															
	MbH	34.3	34.8	35.8	37.3	34.0	34.5	35.5	37.0	33.1	33.6	34.6	36.1	31.6	32.1	33.1	34.6	29.7	30.2	31.2	32.8	28.1	28.5	29.5	31.1	28.1	28.5	29.5	30.1	31.6	31.6															
	S/T	1.00	0.89	0.75	0.6	1.00	0.90	0.75	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.88	0.7	0.7																
	ΔT	25.47	23.73	20.47	17.1	25.42	23.68	20.43	17.1	25.67	23.92	20.67	17.3	25.40	23.66	20.41	17.0	25.17	23.43	20.18	16.8	26.26	24.52	21.27	17.9	26.26	24.52	21.27	17.9	16.8																
	kW	1.87	1.87	1.86	1.88	2.09	2.09	2.08	2.10	2.34	2.34	2.33	2.35	2.61	2.61	2.60	2.62	2.91	2.91	2.90	2.92	3.26	3.26	3.26	3.28	3.26	3.26	3.26	3.26	3.28	3.28															
	Amps	6.81	6.80	6.79	6.86	7.78	7.77	7.76	7.83	8.86	8.86	8.84	8.91	10.04	10.03	10.01	10.09	11.35	11.34	11.32	11.40	12.88	12.88	12.88	12.86	12.88	12.88	12.86	12.93	12.93																
1260	Hi PR	263	264	266	270	304	305	307	311	347	348	350	354	393	394	396	401	443	444	446	451	496	497	499	504	496	497	499	499	504	504															
	Lo PR	128	130	133	139	136	138	141	146	143	144	148	153	148	150	153	159	154	156	159	164	161	163	166	171	161	163	166	166	171	171															
	MbH	34.8	35.3	36.3	37.8	34.5	35.0	36.0	37.5	33.6	34.1	35.1	36.7	32.1	32.6	33.6	35.1	30.3	30.8	31.8	33.3	28.6	29.1	30.1	31.6	28.6	29.1	30.1	30.1	31.6	31.6															
	S/T	1.00	0.92	0.78	0.6	1.00	0.93	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.88	0.7	0.7																
	ΔT	24.58	22.84	19.59	16.2	24.53	22.79	19.54	16.2	24.78	23.04	19.79	16.4	24.52	22.77	19.52	16.2	24.28	22.54	19.29	15.9	25.37	23.63	20.38	17.0	25.37	23.63	20.38	17.0	15.9																
	kW	1.88	1.87	1.87	1.89	2.10	2.10	2.09	2.11	2.35	2.35	2.34	2.36	2.62	2.62	2.61	2.63	2.92	2.92	2.91	2.93	3.27	3.27	3.27	3.29	3.27	3.27	3.27	3.27	3.29	3.29															
1260	Amps	6.85	6.84	6.83	6.90	7.82	7.82	7.80	7.87	8.91	8.90	8.88	8.96	10.08	10.07	10.05	10.13	11.39	11.38	11.36	11.44	12.93	12.93	12.92	12.90	12.93	12.92	12.92	12.90	12.90	12.98															
	Hi PR	265	266	268	273	306	307	309	314	349	350	352	357	395	396	398	403	445	446	448	453	499	500	501	506	499	500	501	501	506	506															
	Lo PR	130	132	135	141	138	140	143	148	145	146	150	155	150	152	155	161	156	158	161	166	163	165	168	173	163	165	168	168	173	173															

980	MbH	34.4	34.9	35.9	37.4	34.1	34.6	35.6	37.1	33.2	33.7	34.7	36.2	31.7	32.2	33.2	34.7	29.9	30.3	31.4	32.9	28.2	28.7	29.7	31.2
	S/T	1.00	0.93	0.79	0.6	1.00	1.00	0.80	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.8
	ΔT	29.94	28.20	24.95	21.6	29.89	28.15	24.90	21.5	30.14	28.40	25.14	21.8	29.87	28.13	24.88	21.5	29.64	27.90	24.65	21.3	30.73	28.99	25.74	22.4
	kW	1.86	1.86	1.85	1.87	2.08	2.08	2.08	2.09	2.33	2.33	2.33	2.34	2.60	2.60	2.60	2.61	2.90	2.90	2.90	2.91	3.26	3.25	3.25	3.27
	Amps	6.78	6.77	6.75	6.83	7.75	7.74	7.72	7.80	8.83	8.82	8.81	8.88	10.00	10.00	9.98	10.05	11.32	11.31	11.29	11.37	12.85	12.84	12.83	12.90
	Hi PR	262	263	265	269	303	304	306	310	346	347	349	353	392	393	395	400	442	443	445	450	495	497	498	503
Lo PR	128	130	133	139	136	138	141	146	143	144	148	153	148	150	153	159	154	156	159	164	161	163	166	171	
1120	MbH	34.9	35.3	36.3	37.9	34.6	35.0	36.0	37.6	33.7	34.1	35.2	36.7	32.2	32.6	33.6	35.2	30.3	30.8	31.8	33.3	28.6	29.1	30.1	31.6
	S/T	1.00	1.00	0.85	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
	ΔT	28.89	27.15	23.89	20.5	28.84	27.10	23.85	20.5	29.08	27.34	24.09	20.7	28.82	27.08	23.83	20.5	28.59	26.85	23.60	20.2	29.68	27.94	24.69	21.3
	kW	1.87	1.87	1.87	1.88	2.09	2.09	2.09	2.11	2.34	2.34	2.34	2.36	2.61	2.61	2.61	2.62	2.91	2.91	2.91	2.93	3.27	3.27	3.26	3.28
	Amps	6.83	6.82	6.80	6.88	7.80	7.79	7.77	7.85	8.88	8.88	8.86	8.93	10.06	10.05	10.03	10.11	11.37	11.36	11.34	11.42	12.90	12.89	12.88	12.95
	Hi PR	264	265	267	272	305	306	308	313	348	349	351	356	394	396	397	402	444	445	447	452	498	499	501	505
Lo PR	130	132	135	140	138	139	143	148	145	146	149	155	150	152	155	160	156	157	161	166	163	164	168	173	
1260	MbH	35.4	35.9	36.9	38.4	35.1	35.6	36.6	38.1	34.2	34.7	35.7	37.2	32.7	33.2	34.2	35.7	30.8	31.3	32.3	33.9	29.2	29.6	30.6	32.2
	S/T	1.00	1.00	0.89	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.92	0.8	1.00	1.00	0.94	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9
	ΔT	28.00	26.26	23.01	19.6	27.95	26.21	22.96	19.6	28.20	26.46	23.20	19.8	27.94	26.19	22.94	19.6	27.70	25.96	22.71	19.3	28.79	27.05	23.80	20.4
	kW	1.88	1.88	1.88	1.89	2.10	2.10	2.10	2.12	2.35	2.35	2.35	2.36	2.62	2.62	2.62	2.63	2.92	2.92	2.92	2.94	3.28	3.28	3.27	3.29
	Amps	6.87	6.86	6.85	6.92	7.84	7.83	7.82	7.89	8.92	8.92	8.90	8.97	10.10	10.09	10.07	10.15	11.41	11.40	11.38	11.46	12.94	12.94	12.92	12.99
	Hi PR	266	267	269	274	307	308	310	315	350	351	353	358	397	398	400	404	446	448	449	454	500	501	503	507
Lo PR	132	134	137	142	140	142	145	150	147	148	151	157	152	154	157	162	158	159	163	168	165	166	170	175	

		OUTDOOR AMBIENT TEMPERATURE												115																							
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
		ENTERING INDOOR WET BULB TEMPERATURE																																			
1500	MBh	58.29	59.11	60.85	-	57.77	58.59	60.33	-	56.24	57.07	58.81	-	53.63	54.45	56.19	-	50.43	51.25	52.99	-	47.51	48.33	50.07	-	47.51	48.33	50.07	-	47.51	48.33	50.07	-				
	S/T	0.58	0.51	0.38	-	0.59	0.52	0.39	-	0.61	0.54	0.41	-	0.63	0.56	0.43	-	0.65	0.58	0.45	-	1.00	0.63	0.50	-	1.00	0.63	0.50	-	1.00	0.63	0.50	-				
	ΔT	20.69	18.77	15.19	-	20.64	18.72	15.13	-	20.91	18.99	15.40	-	20.62	18.70	15.11	-	20.36	18.44	14.86	-	21.57	19.65	16.06	-	21.57	19.65	16.06	-	21.57	19.65	16.06	-				
	kW	3.62	3.62	3.61	-	4.08	4.07	4.07	-	4.59	4.59	4.58	-	5.14	5.14	5.13	-	5.76	5.76	5.75	-	6.49	6.48	6.47	-	6.49	6.48	6.47	-	6.49	6.48	6.47	-				
	Amps	13.48	13.47	13.43	-	15.48	15.46	15.43	-	17.70	17.68	17.65	-	20.10	20.09	20.05	-	22.79	22.77	22.74	-	25.94	25.93	25.89	-	25.94	25.93	25.89	-	25.94	25.93	25.89	-				
	Hi PR	280.70	281.92	283.89	-	324.98	326.19	328.17	-	371.36	372.57	374.55	-	421.30	422.52	424.49	-	475.15	476.36	478.34	-	532.61	533.83	535.80	-	532.61	533.83	535.80	-	532.61	533.83	535.80	-				
70	Lo PR	117.85	119.30	122.30	-	125.01	126.47	129.47	-	131.29	132.74	135.74	-	136.59	138.05	141.04	-	141.80	143.25	146.25	-	148.32	149.77	152.77	-	148.32	149.77	152.77	-	148.32	149.77	152.77	-				
	MBh	59.01	59.83	61.57	-	58.49	59.31	61.05	-	56.97	57.79	59.53	-	54.35	55.17	56.91	-	51.15	51.98	53.72	-	48.23	49.06	50.80	-	48.23	49.06	50.80	-	48.23	49.06	50.80	-				
	S/T	0.64	0.56	0.43	-	0.64	0.57	0.44	-	0.67	0.59	0.46	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.68	0.55	-	1.00	0.68	0.55	-	1.00	0.68	0.55	-				
	ΔT	19.61	17.69	14.10	-	19.55	17.63	14.05	-	19.82	17.90	14.32	-	19.53	17.61	14.03	-	19.28	17.36	13.77	-	20.48	18.56	14.97	-	20.48	18.56	14.97	-	20.48	18.56	14.97	-				
	kW	3.64	3.64	3.63	-	4.10	4.10	4.09	-	4.61	4.61	4.60	-	5.16	5.16	5.15	-	5.78	5.78	5.77	-	6.51	6.50	6.50	-	6.51	6.50	6.50	-	6.51	6.50	6.50	-				
	Amps	13.58	13.57	13.53	-	15.57	15.56	15.52	-	17.79	17.78	17.74	-	20.20	20.18	20.15	-	22.89	22.87	22.84	-	26.04	26.02	25.99	-	26.04	26.02	25.99	-	26.04	26.02	25.99	-				
1900	Hi PR	282.94	284.16	286.13	-	327.21	328.43	330.40	-	373.60	374.81	376.79	-	423.54	424.75	426.73	-	477.38	478.60	480.57	-	534.85	536.06	538.04	-	534.85	536.06	538.04	-	534.85	536.06	538.04	-				
	Lo PR	119.48	120.94	123.93	-	126.65	128.10	131.10	-	132.92	134.38	137.37	-	138.22	139.68	142.68	-	143.43	144.89	147.88	-	149.95	151.41	154.40	-	149.95	151.41	154.40	-	149.95	151.41	154.40	-				
	MBh	59.87	60.69	62.43	-	59.35	60.17	61.91	-	57.83	58.65	60.39	-	55.21	56.03	57.77	-	52.01	52.84	54.58	-	49.09	49.92	51.66	-	49.09	49.92	51.66	-	49.09	49.92	51.66	-				
	S/T	0.67	0.60	0.47	-	0.67	0.60	0.47	-	0.70	0.63	0.50	-	0.72	0.64	0.51	-	1.00	0.66	0.54	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-				
	ΔT	18.68	16.76	13.18	-	18.63	16.71	13.13	-	18.90	16.98	13.39	-	18.61	16.69	13.11	-	18.36	16.43	12.85	-	19.56	17.64	14.05	-	19.56	17.64	14.05	-	19.56	17.64	14.05	-				
	kW	3.66	3.66	3.65	-	4.12	4.12	4.11	-	4.63	4.63	4.62	-	5.18	5.18	5.17	-	5.80	5.80	5.79	-	6.53	6.52	6.52	-	6.53	6.52	6.52	-	6.53	6.52	6.52	-				
75	Amps	13.66	13.65	13.61	-	15.65	15.64	15.60	-	17.88	17.86	17.83	-	20.28	20.27	20.23	-	22.97	22.95	22.92	-	26.12	26.11	26.07	-	26.12	26.11	26.07	-	26.12	26.11	26.07	-				
	Hi PR	285.12	286.34	288.31	-	329.39	330.61	332.58	-	375.77	376.99	378.96	-	425.71	426.93	428.90	-	479.56	480.78	482.75	-	537.02	538.24	540.21	-	537.02	538.24	540.21	-	537.02	538.24	540.21	-				
	Lo PR	121.28	122.73	125.73	-	128.44	129.90	132.90	-	134.72	136.17	139.17	-	140.02	141.48	144.48	-	145.23	146.68	149.68	-	151.75	153.20	156.20	-	151.75	153.20	156.20	-	151.75	153.20	156.20	-				
	MBh	58.32	59.14	60.88	63.54	57.80	58.62	60.36	63.02	56.28	57.10	58.84	61.50	53.66	54.48	56.22	58.88	50.46	51.29	53.03	55.68	47.54	48.37	50.11	52.76	47.54	48.37	50.11	52.76	47.54	48.37	50.11	52.76				
	S/T	0.71	0.63	0.50	0.37	0.71	0.64	0.51	0.37	0.74	0.66	0.53	0.40	1.00	0.68	0.55	0.42	1.00	0.70	0.57	0.44	1.00	0.75	0.62	0.49	1.00	0.75	0.62	0.49	1.00	0.75	0.62	0.49				
	ΔT	24.92	22.99	19.41	15.69	24.86	22.94	19.36	15.64	25.13	23.21	19.63	15.91	24.84	22.92	19.34	15.62	24.59	22.67	19.08	15.36	25.79	23.87	20.28	16.57	25.79	23.87	20.28	16.57	25.79	23.87	20.28	16.57				
1500	kW	3.62	3.61	3.61	3.64	4.08	4.07	4.06	4.10	4.59	4.58	4.58	4.61	5.14	5.14	5.13	5.16	5.76	5.75	5.75	5.78	6.48	6.48	6.47	6.51	6.48	6.48	6.47	6.51	6.48	6.48	6.47	6.51				
	Amps	13.47	13.46	13.42	13.57	15.46	15.45	15.41	15.57	17.69	17.67	17.64	17.79	20.09	20.07	20.04	20.19	22.78	22.76	22.73	22.88	25.93	25.91	25.88	26.03	25.93	25.91	25.88	26.03	25.93	25.91	25.88	26.03				
	Hi PR	280.95	282.17	284.14	289.03	325.22	326.44	328.41	333.30	371.60	372.82	374.79	379.69	421.55	422.76	424.74	429.63	475.39	476.61	478.58	483.47	532.86	534.07	536.05	540.94	532.86	534.07	536.05	540.94	532.86	534.07	536.05	540.94				
	Lo PR	117.88	119.33	122.33	127.34	125.04	126.50	129.49	134.51	131.31	132.77	135.77	140.78	136.62	138.07	141.07	146.09	141.83	143.28	146.28	151.29	148.35	149.80	152.80	157.81	148.35	149.80	152.80	157.81	148.35	149.80	152.80	157.81				
	MBh	59.04	59.87	61.61	64.26	58.52	59.35	61.09	63.74	57.00	57.82	59.56	62.22	54.39	55.21	56.95	59.61	51.19	52.01	53.75	56.41	48.27	49.09	50.83	53.49	48.27	49.09	50.83	53.49	48.27	49.09	50.83	53.49				
	S/T	0.76	0.69	0.56	0.42	0.77	0.69	0.56	0.43	0.79	0.72	0.59	0.45	1.00	0.74	0.61	0.47	1.00	0.76	0.63	0.49	1.00	0.81	0.68	0.54	1.00	0.81	0.68	0.54	1.00	0.81	0.68	0.54				
75	ΔT	23.83	21.91	18.32	14.61	23.78	21.86	18.27	14.56	24.05	22.13	18.54	14.83	23.76	21.84	18.25	14.54	23.50	21.58	17.99	14.28	24.70	22.78	19.20	15.48	24.70	22.78	19.20	15.48	24.70	22.78	19.20	15.48				
	kW	3.64	3.64	3.63	3.66	4.10	4.09	4.09	4.12	4.61	4.61	4.60	4.63	5.16	5.16	5.15	5.19	5.78	5.78	5.77	5.80	6.51	6.50	6.49	6.53	6.51	6.50	6.49	6.53	6.51	6.50	6.49	6.53				
	Amps	13.57	13.55	13.52	13.67	15.56	15.54	15.51	15.66	17.78	17.77	17.73	17.88	20.19	20.17	20.14	20.29	22.87	22.86	22.82	22.98	26.03	26.01	25.98	26.13	26.03	26.01	25.98	26.13	26.03	26.01	25.98	26.13				
	Hi PR	283.19	284.41	286.38	291.27	327.46	328.68	330.65	335.54	373.84	375.06	377.03	381.92	423.79	425.00	426.98	431.87	477.63	478.85	480.82	485.71	535.10	536.31	538.28	543.18	535.10	536.31	538.28	543.18	535.10	536.31	538.28	543.18				
	Lo PR	119.51	120.96	123.96	128.98	126.67	128.12																														

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																															
				65												75				85				95				105				115			
				ENTERING INDOOR WET BULB TEMPERATURE																															
59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1500	MbH	58.62	59.45	61.19	63.84	58.10	58.92	60.66	63.32	56.58	57.40	59.14	61.80	53.96	54.79	56.53	59.18	50.77	51.59	53.33	55.99	47.85	48.67	50.41	53.07									
		S/T	0.83	0.75	0.62	0.49	1.00	0.76	0.63	0.49	1.00	0.78	0.65	0.52	1.00	0.80	0.67	0.54	1.00	0.82	0.69	0.56	1.00	1.00	0.74	0.61									
		ΔT	29.17	27.25	23.66	19.94	29.11	27.19	23.61	19.89	29.38	27.46	23.88	20.16	29.09	27.17	23.59	19.87	28.84	26.92	23.33	19.62	30.04	28.12	24.53	20.82									
		kW	3.62	3.62	3.61	3.64	4.08	4.07	4.07	4.10	4.59	4.59	4.58	4.61	5.14	5.14	5.13	5.17	5.76	5.76	5.75	5.78	6.49	6.48	6.47	6.51									
		Amps	13.48	13.47	13.43	13.58	15.47	15.46	15.42	15.58	17.70	17.68	17.65	17.80	20.10	20.08	20.05	20.20	22.79	22.77	22.74	22.89	25.94	25.92	25.89	26.04									
		Hi PR	281.47	282.69	284.66	289.55	325.74	326.96	328.93	333.82	372.12	373.34	375.31	380.20	422.06	423.28	425.25	430.14	475.91	477.13	479.10	483.99	533.37	534.59	536.56	541.45									
		Lo PR	118.40	119.85	122.85	127.86	125.56	127.02	130.01	135.03	131.84	133.29	136.29	141.30	137.14	138.59	141.59	146.61	142.35	143.80	146.80	151.81	148.87	150.32	153.32	158.33									
		MbH	59.35	60.17	61.91	64.57	58.82	59.65	61.39	64.05	57.30	58.13	59.87	62.52	54.69	55.51	57.25	59.91	51.49	52.31	54.05	56.71	48.57	49.39	51.13	53.79									
1700	1700	S/T	0.88	0.81	0.68	0.54	1.00	0.81	0.68	0.55	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.59	1.00	1.00	0.75	0.61	1.00	1.00	0.80	0.66									
		ΔT	28.08	26.16	22.57	18.86	28.03	26.11	22.52	18.81	28.30	26.38	22.79	19.08	28.01	26.09	22.50	18.79	27.75	25.83	22.25	18.53	28.96	27.03	23.45	19.73									
		kW	3.64	3.64	3.63	3.67	4.10	4.10	4.09	4.12	4.61	4.61	4.60	4.63	5.16	5.16	5.15	5.19	5.78	5.78	5.77	5.81	6.51	6.50	6.50	6.53									
		Amps	13.58	13.56	13.53	13.68	15.57	15.55	15.52	15.67	17.79	17.78	17.74	17.89	20.20	20.18	20.15	20.30	22.88	22.87	22.83	22.99	26.04	26.02	25.99	26.14									
		Hi PR	283.71	284.92	286.90	291.79	327.98	329.20	331.17	336.06	374.36	375.58	377.55	382.44	424.30	425.52	427.49	432.38	478.15	479.37	481.34	486.23	535.61	536.83	538.80	543.69									
		Lo PR	120.03	121.48	124.48	129.50	127.19	128.65	131.65	136.66	133.47	134.92	137.92	142.94	138.77	140.23	143.23	148.24	143.98	145.43	148.43	153.45	150.50	151.95	154.95	159.97									
		MbH	60.21	61.03	62.77	65.43	59.68	60.51	62.25	64.91	58.16	58.99	60.73	63.38	55.55	56.37	58.11	60.77	52.35	53.17	54.91	57.57	49.43	50.25	51.99	54.65									
		S/T	0.91	0.84	0.71	0.57	1.00	0.84	0.71	0.58	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.83	0.69									
1900	1900	ΔT	27.16	25.24	21.65	17.94	27.11	25.19	21.60	17.88	27.38	25.46	21.87	18.15	27.09	25.17	21.58	17.86	26.83	24.91	21.32	17.61	28.03	26.11	22.53	18.81									
		kW	3.66	3.66	3.65	3.68	4.12	4.12	4.11	4.14	4.63	4.63	4.62	4.65	5.18	5.18	5.17	5.21	5.80	5.80	5.79	5.82	6.53	6.52	6.51	6.55									
		Amps	13.66	13.64	13.61	13.76	15.65	15.64	15.60	15.75	17.87	17.86	17.82	17.98	20.28	20.26	20.23	20.38	22.97	22.95	22.92	23.07	26.12	26.10	26.07	26.22									
		Hi PR	285.88	287.10	289.07	293.96	330.16	331.37	333.35	338.24	376.54	377.75	379.73	384.62	426.48	427.70	429.67	434.56	480.32	481.54	483.51	488.40	537.79	539.00	540.98	545.87									
		Lo PR	121.83	123.28	126.28	131.30	128.99	130.45	133.45	138.46	135.27	136.72	139.72	144.73	140.57	142.03	145.02	150.04	145.78	147.23	150.23	155.15	152.30	153.75	156.75	161.76									

85	1500	Mbh	59.60	60.43	62.17	64.82	59.08	59.91	61.65	64.30	57.56	58.38	60.12	62.78	54.94	55.77	57.51	60.17	51.75	52.57	54.31	56.97	48.83	49.65	51.39	54.05
		S/T	1.00	0.85	0.72	0.58	1.00	0.86	0.73	0.59	1.00	0.88	0.75	0.61	1.00	1.00	0.77	0.63	1.00	1.00	0.79	0.65	1.00	1.00	0.84	0.70
		ΔT	32.94	31.02	27.43	23.72	32.88	30.96	27.38	23.66	33.15	31.23	27.65	23.93	32.87	30.94	27.36	23.64	32.61	30.69	27.10	23.39	33.81	31.89	28.30	24.59
		kW	3.63	3.63	3.62	3.65	4.09	4.08	4.08	4.11	4.60	4.59	4.59	4.62	5.15	5.15	5.14	5.17	5.77	5.77	5.76	5.79	6.49	6.49	6.48	6.52
		Amps	13.52	13.50	13.47	13.62	15.51	15.50	15.46	15.61	17.73	17.72	17.68	17.84	20.14	20.12	20.09	20.24	22.83	22.81	22.78	22.93	25.98	25.96	25.93	26.08
	Hi PR	282.79	284.01	285.98	290.87	327.06	328.28	330.25	335.14	373.44	374.66	376.63	381.52	423.38	424.60	426.57	431.46	477.23	478.45	480.42	485.31	534.69	535.91	537.88	542.77	
	Lo PR	120.16	121.62	124.61	129.63	127.73	128.78	131.78	136.79	133.60	135.06	138.05	143.07	138.91	140.36	143.36	148.37	144.11	145.57	148.56	153.58	150.63	152.09	155.08	160.10	
	1700	Mbh	60.33	61.15	62.89	65.55	59.81	60.63	62.37	65.03	58.29	59.11	60.85	63.51	55.67	56.49	58.23	60.89	52.47	53.29	55.03	57.69	49.55	50.37	52.11	54.77
		S/T	1.00	0.90	0.77	0.64	1.00	0.91	0.78	0.64	1.00	1.00	0.80	0.67	1.00	1.00	0.82	0.69	1.00	1.00	0.84	0.71	1.00	1.00	0.89	0.76
		ΔT	31.85	29.93	26.35	22.63	31.80	29.88	26.29	22.58	32.07	30.15	26.56	22.85	31.78	29.86	26.27	22.56	31.52	29.60	26.02	22.30	32.73	30.81	27.22	23.50
kW		3.65	3.65	3.64	3.67	4.11	4.11	4.10	4.13	4.62	4.62	4.61	4.64	5.17	5.17	5.16	5.20	5.79	5.79	5.78	5.81	6.52	6.51	6.50	6.54	
Amps		13.62	13.60	13.57	13.72	15.61	15.59	15.56	15.71	17.83	17.81	17.78	17.93	20.24	20.22	20.19	20.34	22.92	22.91	22.87	23.03	26.08	26.06	26.03	26.18	
1900	Hi PR	285.03	286.24	288.22	293.11	329.30	330.52	332.49	337.38	375.68	376.90	378.87	383.76	425.62	426.84	428.81	433.70	479.47	480.68	482.66	487.55	536.93	538.15	540.12	545.01	
	Lo PR	121.80	123.25	126.25	131.26	128.96	130.41	133.41	138.43	135.23	136.69	139.69	144.70	140.54	141.99	144.99	150.01	145.75	147.20	150.20	155.21	152.26	153.72	156.72	161.73	
	Mbh	61.19	62.01	63.75	66.41	60.67	61.49	63.23	65.89	59.15	59.97	61.71	64.37	56.53	57.35	59.09	61.75	53.33	54.15	55.89	58.55	50.41	51.23	52.97	55.63	
	S/T	1.00	0.94	0.81	0.67	1.00	0.94	0.81	0.67	1.00	1.00	0.84	0.70	1.00	1.00	0.85	0.72	1.00	1.00	0.88	0.74	1.00	1.00	1.00	0.79	
	ΔT	30.93	29.01	25.42	21.71	30.88	28.96	25.37	21.65	31.15	29.23	25.64	21.92	30.86	28.94	25.35	21.64	30.60	28.68	25.09	21.38	31.80	29.88	26.30	22.58	
1900	kW	3.67	3.67	3.66	3.69	4.13	4.12	4.12	4.15	4.64	4.64	4.63	4.66	5.19	5.19	5.18	5.22	5.81	5.81	5.80	5.83	6.54	6.53	6.52	6.56	
	Amps	13.70	13.68	13.65	13.80	15.69	15.67	15.64	15.79	17.91	17.90	17.86	18.01	20.32	20.30	20.27	20.42	23.00	22.99	22.95	23.11	26.16	26.14	26.11	26.26	
	Hi PR	287.20	288.42	290.39	295.28	331.47	332.69	334.66	339.56	377.86	379.07	381.05	385.94	427.80	429.01	430.99	435.88	481.64	482.86	484.83	489.72	539.11	540.32	542.30	547.19	
	Lo PR	123.59	125.05	128.05	133.06	130.76	132.21	135.21	140.23	137.03	138.49	141.49	146.50	142.34	143.79	146.79	151.80	147.54	149.00	152.00	157.01	154.06	155.52	158.52	163.53	

DB = Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction access fittings.  
Subcooling, 5-7 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 15-18°F @ the compressor suction access fitting connection.

		OUTDOOR AMBIENT TEMPERATURE																																															
		65						75						85						95						105						115																	
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
		ENTERING INDOOR WET BULB TEMPERATURE																																															
70	1050	MBh	41.91	42.50	43.75	-	41.53	42.12	43.38	-	40.44	41.03	42.28	-	38.56	39.15	40.40	-	36.26	36.85	38.10	-	34.16	34.75	36.00	-	32.62	33.21	34.46	-	30.72	31.31	32.56	-															
		S/T	0.60	0.52	0.39	-	0.61	0.53	0.40	-	0.63	0.56	0.42	-	0.65	0.57	0.44	-	1.00	0.60	0.46	-	1.00	0.65	0.51	-	1.00	0.60	0.46	-	1.00	0.65	0.51	-															
		ΔT	19.97	18.11	14.65	-	19.92	18.06	14.60	-	20.18	18.32	14.86	-	19.90	18.04	14.58	-	19.65	17.80	14.34	-	20.81	18.96	15.50	-	19.65	17.80	14.34	-	20.81	18.96	15.50	-															
		kW	2.28	2.27	2.27	-	2.57	2.56	2.56	-	2.89	2.88	2.88	-	3.23	3.23	3.23	-	3.62	3.62	3.62	-	4.08	4.08	4.07	-	3.62	3.62	3.62	-	4.08	4.08	4.07	-															
		Amps	8.48	8.47	8.45	-	9.73	9.72	9.70	-	11.13	11.12	11.10	-	12.64	12.64	12.61	-	14.34	14.33	14.30	-	16.32	16.31	16.29	-	14.34	14.33	14.30	-	16.32	16.31	16.29	-															
		Hi PR	268.35	269.52	271.40	-	310.68	311.84	313.73	-	355.02	356.18	358.07	-	402.76	403.93	405.81	-	454.24	455.40	457.29	-	509.17	510.34	512.22	-	454.24	455.40	457.29	-	509.17	510.34	512.22	-															
		Lo PR	121.15	122.64	125.73	-	128.51	130.01	133.09	-	134.96	136.46	139.54	-	140.42	141.91	144.99	-	145.77	147.26	150.35	-	152.47	153.97	157.05	-	145.77	147.26	150.35	-	152.47	153.97	157.05	-															
70	1190	MBh	42.43	43.02	44.27	-	42.05	42.65	43.90	-	40.96	41.55	42.80	-	39.08	39.67	40.92	-	36.78	37.37	38.62	-	34.68	35.27	36.52	-	36.78	37.37	38.62	-	34.68	35.27	36.52	-															
		S/T	0.65	0.58	0.45	-	0.66	0.59	0.45	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.70	0.57	-	1.00	0.65	0.52	-	1.00	0.70	0.57	-															
		ΔT	18.92	17.07	13.61	-	18.87	17.02	13.56	-	19.13	17.28	13.82	-	18.85	17.00	13.54	-	18.60	16.75	13.29	-	19.76	17.91	14.45	-	18.60	16.75	13.29	-	19.76	17.91	14.45	-															
		kW	2.29	2.29	2.28	-	2.58	2.58	2.57	-	2.90	2.90	2.89	-	3.25	3.25	3.24	-	3.64	3.64	3.63	-	4.09	4.09	4.09	-	3.64	3.64	3.63	-	4.09	4.09	4.09	-															
		Amps	8.54	8.53	8.51	-	9.79	9.78	9.76	-	11.19	11.18	11.16	-	12.71	12.70	12.67	-	14.40	14.39	14.36	-	16.38	16.37	16.35	-	14.40	14.39	14.36	-	16.38	16.37	16.35	-															
		Hi PR	270.49	271.66	273.54	-	312.82	313.98	315.87	-	357.16	358.32	360.21	-	404.90	406.07	407.95	-	456.38	457.54	459.43	-	511.31	512.48	514.36	-	456.38	457.54	459.43	-	511.31	512.48	514.36	-															
		Lo PR	122.83	124.32	127.40	-	130.19	131.69	134.77	-	136.64	138.14	141.22	-	142.10	143.59	146.67	-	147.45	148.94	152.03	-	154.15	155.64	158.73	-	147.45	148.94	152.03	-	154.15	155.64	158.73	-															
75	1330	MBh	43.05	43.64	44.89	-	42.67	43.26	44.51	-	41.58	42.17	43.42	-	39.70	40.29	41.54	-	37.40	37.99	39.24	-	35.30	35.89	37.14	-	37.40	37.99	39.24	-	35.30	35.89	37.14	-															
		S/T	0.69	0.61	0.48	-	0.69	0.62	0.48	-	0.72	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-															
		ΔT	18.03	16.18	12.72	-	17.98	16.13	12.67	-	18.24	16.39	12.93	-	17.96	16.11	12.65	-	17.71	15.86	12.40	-	18.87	17.02	13.56	-	17.71	15.86	12.40	-	18.87	17.02	13.56	-															
		kW	2.30	2.30	2.30	-	2.59	2.59	2.58	-	2.91	2.91	2.91	-	3.26	3.26	3.25	-	3.65	3.65	3.64	-	4.11	4.10	4.10	-	3.65	3.65	3.64	-	4.11	4.10	4.10	-															
		Amps	8.59	8.58	8.56	-	9.85	9.84	9.82	-	11.24	11.23	11.21	-	12.76	12.75	12.73	-	14.45	14.44	14.42	-	16.43	16.42	16.40	-	14.45	14.44	14.42	-	16.43	16.42	16.40	-															
		Hi PR	272.57	273.74	275.62	-	314.90	316.06	317.95	-	359.24	360.40	362.29	-	406.98	408.15	410.03	-	458.46	459.62	461.51	-	513.39	514.56	516.44	-	458.46	459.62	461.51	-	513.39	514.56	516.44	-															
		Lo PR	124.68	126.17	129.25	-	132.04	133.54	136.62	-	138.49	139.99	143.07	-	143.94	145.44	148.52	-	149.30	150.79	153.87	-	156.00	157.49	160.58	-	149.30	150.79	153.87	-	156.00	157.49	160.58	-															
75	1050	MBh	41.93	42.52	43.78	45.69	41.56	42.15	43.40	45.31	40.46	41.06	42.31	44.22	38.58	39.17	40.43	42.34	36.28	36.87	38.13	40.04	34.18	34.78	36.03	37.94	36.28	36.87	38.13	40.04	34.18	34.78	36.03	37.94															
		S/T	0.73	0.65	0.52	0.38	0.73	0.66	0.52	0.38	1.00	0.68	0.55	0.41	1.00	0.70	0.57	0.43	1.00	0.72	0.59	0.45	1.00	0.77	0.64	0.50	1.00	0.72	0.59	0.45	1.00	0.77	0.64	0.50															
		ΔT	24.04	22.19	18.73	15.14	23.99	22.14	18.68	15.09	24.25	22.40	18.94	15.35	23.97	22.12	18.66	15.07	23.73	21.87	18.41	14.83	24.89	23.03	19.57	15.99	23.73	21.87	18.41	14.83	24.89	23.03	19.57	15.99															
		kW	2.28	2.27	2.27	2.29	2.56	2.56	2.56	2.58	2.88	2.88	2.88	2.90	3.23	3.23	3.23	3.25	3.62	3.62	3.61	3.64	4.08	4.08	4.07	4.09	3.62	3.62	3.61	3.64	4.08	4.08	4.07	4.09															
		Amps	8.47	8.46	8.44	8.54	9.73	9.72	9.69	9.79	11.12	11.11	11.09	11.19	12.64	12.63	12.61	12.70	14.33	14.32	14.30	14.39	16.31	16.30	16.28	16.37	14.33	14.32	14.30	14.39	16.31	16.30	16.28	16.37															
		Hi PR	268.59	269.75	271.64	276.31	310.91	312.08	313.96	318.64	355.25	356.42	358.30	362.98	403.00	404.16	406.05	410.72	454.48	455.64	457.53	462.20	509.41	510.57	512.46	517.14	454.48	455.64	457.53	462.20	509.41	510.57	512.46	517.14															
		Lo PR	121.18	122.67	125.75	130.91	128.54	130.04	133.12	138.27	134.99	136.49	139.57	144.72	140.44	141.94	145.02	150.18	145.80	147.29	150.37	155.53	152.50	153.99	157.08	162.23	145.80	147.29	150.37	155.53	152.50	153.99	157.08	162.23															
75	1190	MBh	42.45	43.04	44.30	46.21	42.08	42.67	43.92	45.83	40.98	41.58	42.83	44.74	39.10	39.69	40.95	42.86	36.80	37.40	38.65	40.56	34.70	35.30	36.55	38.46	36.80	37.40	38.65	40.56	34.70	35.30	36.55	38.46															
		S/T	0.78	0.71	0.57	0.43	0.79	0.71	0.58	0.44	1.00	0.74	0.60	0.46	1.00	0.76	0.62	0.48	1.00	0.78	0.64	0.50	1.00	1.00	0.69	0.55	1.00	0.78	0.64	0.50	1.00	1.00	0.69	0.55															
		ΔT	23.00	21.14	17.68	14.10	22.95	21.09	17.63	14.05	23.21	21.35	17.89	14.31	22.93	21.07	17.61	14.03	22.68	20.83	17.36	13.78	23.84	21.99	18.53	14.94	22.68	20.83	17.36	13.78	23.84	21.99	18.53	14.94															
		kW	2.29	2.29	2.28	2.30	2.58	2.58	2.57	2.59	2.90	2.90	2.89	2.91	3.25	3.25	3.24	3.26	3.64	3.63	3.63	3.65	4.09	4.09	4.08	4.11	3.64	3.63	3.63	3.65	4.09	4.09	4.08	4.11															
		Amps	8.53	8.52	8.50	8.60	9.79	9.78	9.76	9.85	11.18	11.17	11.15	11.25	12.70	12.69	12.67	12.76	14.39	14.38	14.36	14.45	16.37	16.36	16.34	16.44	14.39	14.38	14.36	14.45	16.37	16.36	16.34	16.44															
		Hi PR	270.73	271.89	273.78	278.45	313.05	314.22	316.10	320.78	357.39	358.56	360.44	365.12	405.14	406.30	408.19	412.86	456.62	457.78	459.67	464.34	511.55	512.71	514.60	519.28	456.62	457.78	459.67	464.34	511.55	512.71	514.60	519.28															
		Lo PR	122.86	124.35	127.43	132.59	130.22	131.72	134.80	139.95	136.67	138.17	141.25	146.40	142.12	143.62	146.70	151.86	147.48	148.97	152.05	157.21																											



		OUTDOOR AMBIENT TEMPERATURE												105												115											
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	
80	MbH	42.15	42.74	43.99	45.90	41.77	42.37	43.62	45.53	40.68	41.27	42.52	44.43	38.80	39.39	40.64	42.55	36.50	37.09	38.34	40.25	34.40	34.99	36.24	38.15	31.50	32.09	33.34	35.25	37.16	39.07	40.98	42.89	44.80	46.71	48.62	50.53
	S/T	0.85	0.77	0.64	0.50	1.00	0.78	0.65	0.51	1.00	0.81	0.67	0.53	1.00	0.82	0.69	0.55	1.00	1.00	0.71	0.57	1.00	1.00	0.76	0.62	0.50	0.49	0.48	0.47	0.46	0.45	0.44	0.43	0.42	0.41	0.40	0.39
	ΔT	28.15	26.29	22.83	19.25	28.10	26.24	22.78	19.20	28.36	26.50	23.04	19.46	28.08	26.22	22.76	19.18	27.83	25.98	22.51	18.93	28.99	27.14	23.67	20.09	16.50	16.09	16.08	16.07	16.06	16.05	16.04	16.03	16.02	16.01	16.00	15.99
	kW	2.28	2.27	2.27	2.29	2.56	2.56	2.56	2.58	2.89	2.88	2.88	2.90	3.23	3.23	3.23	3.25	3.62	3.62	3.62	3.64	4.08	4.08	4.07	4.09	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50
	Amps	8.48	8.47	8.45	8.54	9.73	9.72	9.70	9.80	11.13	11.12	11.10	11.20	12.64	12.63	12.61	12.71	14.33	14.32	14.30	14.40	16.32	16.31	16.29	16.38	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30
1190	Hi PR	269.08	270.25	272.13	276.81	311.41	312.57	314.46	319.13	355.75	356.91	358.80	363.47	403.49	404.66	406.54	411.22	454.97	456.13	458.02	462.69	509.90	511.07	512.95	517.63	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00
	Lo PR	121.71	123.21	126.29	131.44	129.08	130.57	133.65	138.81	135.53	137.02	140.10	145.26	140.98	142.48	145.56	150.71	146.33	147.83	150.91	156.06	153.03	154.53	157.61	162.77	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00
	MbH	42.67	43.26	44.51	46.42	42.29	42.89	44.14	46.05	41.20	41.79	43.04	44.95	39.32	39.91	41.16	43.07	37.02	37.61	38.86	40.77	34.92	35.51	36.76	38.67	31.50	32.09	33.34	35.25	37.16	39.07	40.98	42.89	44.80	46.71	48.62	50.53
	S/T	1.00	0.83	0.70	0.56	1.00	0.84	0.70	0.56	1.00	0.86	0.73	0.59	1.00	0.88	0.75	0.61	1.00	1.00	0.77	0.63	1.00	1.00	0.82	0.68	0.50	0.49	0.48	0.47	0.46	0.45	0.44	0.43	0.42	0.41	0.40	0.39
	ΔT	27.10	25.25	21.78	18.20	27.05	25.19	21.73	18.15	27.31	25.46	21.99	18.41	27.03	25.18	21.72	18.13	26.78	24.93	21.47	17.88	27.94	26.09	22.63	19.04	16.50	16.09	16.08	16.07	16.06	16.05	16.04	16.03	16.02	16.01	16.00	15.99
1330	kW	2.29	2.29	2.28	2.31	2.58	2.58	2.57	2.59	2.90	2.90	2.89	2.92	3.25	3.25	3.25	3.26	3.64	3.63	3.63	3.65	4.09	4.09	4.09	4.11	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50
	Amps	8.54	8.53	8.51	8.61	9.79	9.78	9.76	9.86	11.19	11.18	11.16	11.26	12.70	12.69	12.67	12.77	14.39	14.38	14.36	14.46	16.38	16.37	16.35	16.44	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30
	Hi PR	271.22	272.39	274.27	278.95	313.55	314.71	316.60	321.27	357.89	359.05	360.94	365.61	405.63	406.80	408.68	413.36	457.11	458.27	460.16	464.83	512.04	513.21	515.09	519.77	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00
	Lo PR	123.39	124.89	127.97	133.12	130.76	132.25	135.33	140.49	137.21	138.70	141.78	146.94	142.66	144.15	147.24	152.39	148.01	149.51	152.59	157.74	154.71	156.21	159.29	164.45	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00
	MbH	43.29	43.88	45.13	47.04	42.91	43.50	44.76	46.67	41.82	42.41	43.66	45.57	39.94	40.53	41.78	43.69	37.64	38.23	39.48	41.39	35.54	36.13	37.38	39.29	31.50	32.09	33.34	35.25	37.16	39.07	40.98	42.89	44.80	46.71	48.62	50.53
85	S/T	1.00	0.86	0.73	0.59	1.00	0.87	0.73	0.59	1.00	0.89	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.85	0.71	0.50	0.49	0.48	0.47	0.46	0.45	0.44	0.43	0.42	0.41	0.40	0.39
	ΔT	26.21	24.35	20.89	17.31	26.16	24.30	20.84	17.26	26.42	24.56	21.10	17.52	26.14	24.28	20.82	17.24	25.89	24.04	20.58	16.99	27.05	25.20	21.74	18.15	16.50	16.09	16.08	16.07	16.06	16.05	16.04	16.03	16.02	16.01	16.00	15.99
	kW	2.30	2.30	2.30	2.32	2.59	2.59	2.58	2.61	2.91	2.91	2.91	2.93	3.26	3.26	3.26	3.28	3.65	3.65	3.64	3.66	4.11	4.10	4.10	4.12	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50
	Amps	8.59	8.58	8.56	8.66	9.84	9.83	9.81	9.91	11.24	11.23	11.21	11.31	12.76	12.75	12.72	12.82	14.45	14.44	14.41	14.51	16.43	16.42	16.40	16.49	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30	18.30
	Hi PR	273.30	274.47	276.35	281.03	315.63	316.79	318.68	323.35	359.97	361.13	363.02	367.69	407.71	408.88	410.76	415.44	459.19	460.35	462.24	466.91	514.13	515.29	517.17	521.85	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00	540.00
Lo PR	125.24	126.73	129.82	134.97	132.60	134.10	137.18	142.34	139.05	140.55	143.63	148.79	144.51	146.00	149.09	154.24	149.86	151.36	154.44	159.59	156.56	158.06	161.14	166.29	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00

1050	MbH	42.86	43.45	44.70	46.61	42.48	43.07	44.32	46.23	41.39	41.98	43.23	45.14	39.51	40.10	41.35	43.26	37.21	37.80	39.05	40.96	35.11	35.70	36.95	38.86
	S/T	1.00	0.87	0.74	0.60	1.00	0.88	0.75	0.61	1.00	1.00	0.77	0.63	1.00	1.00	0.79	0.65	1.00	1.00	0.81	0.67	1.00	1.00	0.72	
	ΔT	31.78	29.93	26.47	22.89	31.73	29.88	26.42	22.83	31.99	30.14	26.68	23.10	31.71	29.86	26.40	22.82	31.47	29.61	26.15	22.57	32.63	30.77	27.31	23.73
	kW	2.28	2.28	2.28	2.30	2.57	2.57	2.56	2.59	2.89	2.89	2.88	2.91	3.24	3.24	3.23	3.25	3.63	3.63	3.62	3.64	4.08	4.08	4.08	4.10
	Amps	8.50	8.49	8.47	8.57	9.76	9.75	9.73	9.82	11.15	11.14	11.12	11.22	12.67	12.66	12.64	12.73	14.36	14.35	14.33	14.42	16.34	16.33	16.31	16.41
1190	Hi PR	270.35	271.51	273.40	278.07	312.67	313.83	315.72	320.39	357.01	358.17	360.06	364.73	404.75	405.92	407.80	412.48	456.23	457.39	459.28	463.96	511.17	512.33	514.22	518.89
	Lo PR	123.53	125.02	128.10	133.26	130.89	132.39	135.47	140.62	137.34	138.84	141.92	147.07	142.79	144.29	147.37	152.53	148.15	149.64	152.72	157.88	154.85	156.34	159.43	164.58
	MbH	43.38	43.97	45.22	47.13	43.00	43.59	44.84	46.75	41.91	42.50	43.75	45.66	40.03	40.62	41.87	43.78	37.73	38.32	39.57	41.48	35.63	36.22	37.47	39.38
	S/T	1.00	0.93	0.80	0.66	1.00	0.93	0.80	0.66	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.87	0.73	1.00	1.00	0.78	
	ΔT	30.74	28.88	25.42	21.84	30.69	28.83	25.37	21.79	30.95	29.09	25.63	22.05	30.67	28.81	25.35	21.77	30.42	28.57	25.11	21.52	31.58	29.73	26.27	22.68
1330	kW	2.30	2.29	2.29	2.31	2.58	2.58	2.58	2.60	2.91	2.90	2.90	2.92	3.25	3.25	3.25	3.27	3.64	3.64	3.64	3.66	4.10	4.10	4.09	4.11
	Amps	8.56	8.56	8.53	8.63	9.82	9.81	9.79	9.88	11.22	11.21	11.18	11.28	12.73	12.72	12.70	12.79	14.42	14.41	14.39	14.48	16.40	16.39	16.37	16.47
	Hi PR	272.49	273.65	275.54	280.21	314.81	315.97	317.86	322.53	359.15	360.31	362.20	366.87	406.89	408.06	409.94	414.62	458.37	459.53	461.42	466.10	513.31	514.47	516.36	521.03
	Lo PR	125.21	126.70	129.78	134.94	132.57	134.07	137.15	142.30	139.02	140.52	143.60	148.75	144.47	145.97	149.05	154.21	149.83	151.32	154.40	159.56	156.53	158.02	161.11	166.26
	MbH	43.99	44.59	45.84	47.75	43.62	44.21	45.46	47.37	42.53	43.12	44.37	46.28	40.64	41.24	42.49	44.40	38.34	38.94	40.19	42.10	36.25	36.84	38.09	40.00
1190	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.83	0.69	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.81	
	ΔT	29.85	27.99	24.53	20.95	29.80	27.94	24.48	20.90	30.06	28.20	24.74	21.16	29.78	27.92	24.46	20.88	29.53	27.68	24.22	20.63	30.69	28.84	25.38	21.79
	kW	2.31	2.31	2.30	2.32	2.60	2.59	2.59	2.61	2.92	2.92	2.91	2.93	3.27	3.26	3.26	3.28	3.65	3.65	3.65	3.67	4.11	4.11	4.10	4.13
	Amps	8.62	8.61	8.59	8.68	9.87	9.86	9.84	9.93	11.27	11.26	11.24	11.33	12.78	12.77	12.75	12.84	14.47	14.46	14.44	14.53	16.45	16.44	16.42	16.52
	Hi PR	274.57	275.73	277.62	282.29	316.89	318.05	319.94	324.61	361.23	362.39	364.28	368.95	408.97	410.14	412.02	416.70	460.45	461.62	463.50	468.18	515.39	516.55	518.44	523.11
Lo PR	127.05	128.55	131.63	136.79	134.42	135.91	139.00	144.15	140.87	142.36	145.45	150.60	146.32	147.82	150.90	156.05	151.67	153.17	156.25	161.41	158.38	159.87	162.95	168.11	

## GPHH52441

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	29.83	27.86	25.92	24.02	22.80	21.89	19.59	17.47	15.75	14.47	13.51	13.00	12.35	10.71	9.08	7.45	5.81
T/R	30.35	28.62	26.89	25.17	24.13	23.16	20.73	18.49	16.67	15.31	14.30	13.76	13.07	11.34	9.61	7.88	6.15
kW	1.97	1.92	1.88	1.83	1.81	1.79	1.74	1.70	1.65	1.61	1.56	1.54	1.52	1.47	1.43	1.38	1.34
Amps	7.17	6.97	6.78	6.58	6.46	6.39	6.19	5.99	5.80	5.60	5.41	5.29	5.21	5.02	4.82	4.63	4.43
COP	4.44	4.25	4.05	3.84	3.70	3.59	3.29	3.02	2.79	2.64	2.53	2.48	2.38	2.13	1.86	1.58	1.27
HI PR	393.02	380.24	367.45	354.67	347.00	341.89	329.10	316.32	303.54	290.75	277.97	270.30	265.19	252.40	239.62	226.84	214.05
LO PR	140.46	131.72	122.98	114.24	109.00	105.50	96.77	88.03	79.29	70.55	61.81	56.57	53.07	44.33	35.59	26.86	18.12

## GPHH53041

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	36.66	34.14	31.63	29.17	27.60	26.39	23.37	20.64	18.41	16.74	15.48	14.80	13.95	11.81	9.68	7.55	5.41
T/R	31.11	29.23	27.35	25.47	24.34	23.27	20.61	18.20	16.24	14.76	13.65	13.05	12.30	10.42	8.54	6.65	4.77
kW	2.85	2.75	2.64	2.54	2.48	2.44	2.34	2.24	2.13	2.03	1.93	1.87	1.83	1.73	1.63	1.52	1.42
Amps	10.72	10.27	9.83	9.39	9.12	8.94	8.50	8.06	7.62	7.17	6.73	6.46	6.29	5.84	5.40	4.96	4.51
COP	3.77	3.64	3.51	3.36	3.26	3.17	2.93	2.70	2.53	2.41	2.35	2.32	2.23	2.00	1.75	1.45	1.12
HI PR	406.61	393.39	380.16	366.94	359.00	353.71	340.48	327.26	314.03	300.81	287.58	279.65	274.36	261.13	247.91	234.68	221.45
LO PR	132.73	124.47	116.21	107.95	103.00	99.70	91.44	83.18	74.92	66.67	58.41	53.45	50.15	41.89	33.63	25.38	17.12

## GPHH53641

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	42.16	39.37	36.62	33.93	32.20	30.91	27.64	24.64	22.20	20.38	19.03	18.30	17.37	15.06	12.74	10.42	8.11
T/R	31.28	29.50	27.71	25.92	24.85	23.85	21.33	19.02	17.13	15.73	14.68	14.12	13.41	11.62	9.83	8.04	6.25
kW	2.66	2.62	2.59	2.55	2.52	2.51	2.47	2.43	2.39	2.35	2.32	2.29	2.28	2.24	2.20	2.16	2.12
Amps	9.67	9.50	9.33	9.17	9.07	9.00	8.83	8.66	8.50	8.33	8.16	8.06	7.99	7.83	7.66	7.49	7.32
COP	4.64	4.40	4.15	3.90	3.74	3.61	3.28	2.97	2.72	2.54	2.41	2.34	2.24	1.97	1.70	1.41	1.12
HI PR	371.50	359.42	347.33	335.25	328.00	323.17	311.08	299.00	286.92	274.83	262.75	255.50	250.67	238.58	226.50	214.41	202.33
LO PR	139.17	130.51	121.85	113.20	108.00	104.54	95.88	87.22	78.56	69.90	61.24	56.05	52.58	43.93	35.27	26.61	17.95

## GPHH54241

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	48.42	45.28	42.19	39.15	37.20	35.76	32.10	28.72	25.97	23.93	22.41	21.60	20.56	17.96	15.36	12.76	10.16
T/R	33.16	31.31	29.46	27.61	26.50	25.47	22.86	20.46	18.50	17.04	15.96	15.38	14.64	12.79	10.94	9.09	7.24
kW	3.25	3.21	3.16	3.12	3.09	3.07	3.02	2.98	2.93	2.89	2.84	2.81	2.80	2.75	2.70	2.66	2.61
Amps	12.08	11.88	11.68	11.49	11.37	11.29	11.09	10.89	10.69	10.49	10.29	10.17	10.09	9.89	9.69	9.49	9.29
COP	4.36	4.14	3.91	3.68	3.53	3.41	3.11	2.83	2.60	2.43	2.31	2.25	2.16	1.91	1.67	1.41	1.14
EER	399.82	386.81	373.81	360.80	353.00	347.80	334.79	321.79	308.78	295.78	282.78	274.97	269.77	256.77	243.76	230.76	217.75
HI PR	134.02	125.68	117.34	109.00	104.00	100.66	92.33	83.99	75.65	67.31	58.98	53.97	50.64	42.30	33.96	25.62	17.29
LO PR	143	133	125	114	108	104	96	85	77	69	60	56	54	46	39	33	29

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan) motor)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power



## GGPHH54241

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	35.64	33.21	30.92	28.42	26.84	25.59	22.50	19.73	17.48	15.78	14.49	13.79	12.92	10.75	8.57	6.40	4.22
T/R	30.54	28.63	26.71	24.79	23.64	22.54	19.83	17.38	15.40	13.90	12.76	12.15	11.38	9.47	7.55	5.64	3.72
kW	1.99	1.93	1.88	1.82	1.78	1.76	1.70	1.65	1.59	1.53	1.47	1.44	1.41	1.36	1.30	1.24	1.18
Amps	7.00	6.74	6.49	6.24	6.09	5.99	5.74	5.49	5.23	4.98	4.73	4.58	4.48	4.23	3.98	3.72	3.47
COP	5.24	5.03	4.83	4.58	4.41	4.26	3.87	3.51	3.23	3.02	2.88	2.81	2.68	2.32	1.94	1.51	1.05
HI PR	387.48	374.87	362.27	349.67	342.10	337.06	324.46	311.86	299.25	286.65	274.05	266.49	261.44	248.84	236.24	223.63	211.03
LO PR	131.66	123.47	115.28	107.09	102.17	98.90	90.70	82.51	74.32	66.13	57.94	53.02	49.75	41.56	33.36	25.17	16.98

## GPHH54841

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	56.16	52.62	49.13	45.70	43.50	41.90	37.80	34.00	30.89	28.59	26.91	26.00	24.83	21.92	19.00	16.08	13.17
T/R	31.25	29.56	27.88	26.19	25.18	24.25	21.88	19.68	17.88	16.55	15.57	15.05	14.37	12.68	10.99	9.31	7.62
kW	3.76	3.71	3.67	3.62	3.59	3.57	3.53	3.48	3.43	3.39	3.34	3.31	3.29	3.25	3.20	3.16	3.11
Amps	13.80	13.60	13.40	13.20	13.08	12.99	12.79	12.59	12.39	12.19	11.99	11.87	11.79	11.58	11.38	11.18	10.98
COP	4.38	4.15	3.93	3.70	3.55	3.44	3.14	2.86	2.64	2.47	2.36	2.30	2.21	1.98	1.74	1.49	1.24
HI PR	391.89	379.14	366.39	353.65	346.00	340.90	328.15	315.41	302.66	289.91	277.17	269.52	264.42	251.67	238.93	226.18	213.43
LO PR	131.44	123.26	115.08	106.91	102.00	98.73	90.55	82.37	74.20	66.02	57.84	52.93	49.66	41.49	33.31	25.13	16.95

## GPHH54841

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	41.68	38.83	36.03	33.19	31.38	29.97	26.49	23.34	20.77	18.85	17.38	16.60	15.61	13.15	10.69	8.22	5.76
T/R	33.01	30.99	28.97	26.95	25.74	24.58	21.72	19.14	17.04	15.46	14.26	13.61	12.81	10.78	8.76	6.74	4.72
kW	2.30	2.24	2.18	2.11	2.07	2.05	1.99	1.92	1.86	1.79	1.73	1.69	1.67	1.60	1.54	1.48	1.41
Amps	8.23	7.95	7.67	7.40	7.23	7.12	6.84	6.56	6.29	6.01	5.73	5.57	5.45	5.18	4.90	4.62	4.35
COP	5.30	5.08	4.85	4.60	4.43	4.29	3.91	3.56	3.28	3.08	2.94	2.88	2.75	2.40	2.03	1.63	1.20
HI PR	379.79	367.44	355.09	342.73	335.32	330.38	318.03	305.67	293.32	280.97	268.61	261.20	256.26	243.91	231.55	219.20	206.85
LO PR	129.13	121.10	113.06	105.03	100.21	96.99	88.96	80.93	72.89	64.86	56.82	52.00	48.79	40.76	32.72	24.69	16.66

## GPHH56041

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	69.97	65.64	61.38	57.20	54.50	52.55	47.59	42.94	39.14	36.34	34.30	33.20	31.78	28.23	24.68	21.13	17.58
T/R	36.65	34.71	32.78	30.85	29.69	28.63	25.92	23.39	21.32	19.79	18.68	18.08	17.31	15.38	13.44	11.51	9.57
kW	4.61	4.55	4.49	4.43	4.40	4.38	4.32	4.26	4.20	4.15	4.09	4.05	4.03	3.97	3.92	3.86	3.80
Amps	17.34	17.09	16.83	16.58	16.43	16.33	16.08	15.83	15.58	15.33	15.08	14.93	14.83	14.58	14.33	14.08	13.83
COP	4.45	4.23	4.00	3.78	3.63	3.52	3.23	2.95	2.73	2.57	2.46	2.40	2.31	2.08	1.85	1.61	1.36
HI PR	397.55	384.62	371.69	358.76	351.00	345.83	332.90	319.97	307.04	294.10	281.17	273.41	268.24	255.31	242.38	229.45	216.52
LO PR	122.42	114.80	107.19	99.57	95.00	91.95	84.34	76.72	69.10	61.49	53.87	49.30	46.26	38.64	31.02	23.41	15.79

## GPHH56041


	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	52.20	48.58	45.03	41.54	39.32	37.60	33.33	29.46	26.31	23.94	22.15	21.20	19.99	16.97	13.95	10.93	7.91
T/R	34.25	32.19	30.13	28.07	26.83	25.66	22.74	20.10	17.95	16.34	15.12	14.46	13.64	11.58	9.52	7.46	5.39
kW	2.82	2.75	2.67	2.59	2.54	2.51	2.43	2.35	2.28	2.20	2.12	2.07	2.04	1.96	1.88	1.80	1.73
Amps	10.13	9.79	9.45	9.10	8.90	8.76	8.42	8.08	7.74	7.40	7.05	6.85	6.71	6.37	6.03	5.69	5.35
COP	5.42	5.18	4.95	4.70	4.53	4.39	4.02	3.67	3.39	3.19	3.07	3.00	2.87	2.54	2.17	1.78	1.34
HI PR	385.28	372.75	360.22	347.69	340.17	335.15	322.62	310.09	297.56	285.03	272.49	264.98	259.96	247.43	234.90	222.37	209.84
LO PR	120.27	112.78	105.30	97.82	93.33	90.34	82.85	75.37	67.89	60.41	52.92	48.44	45.44	37.96	30.48	22.99	15.51

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan) motor)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power

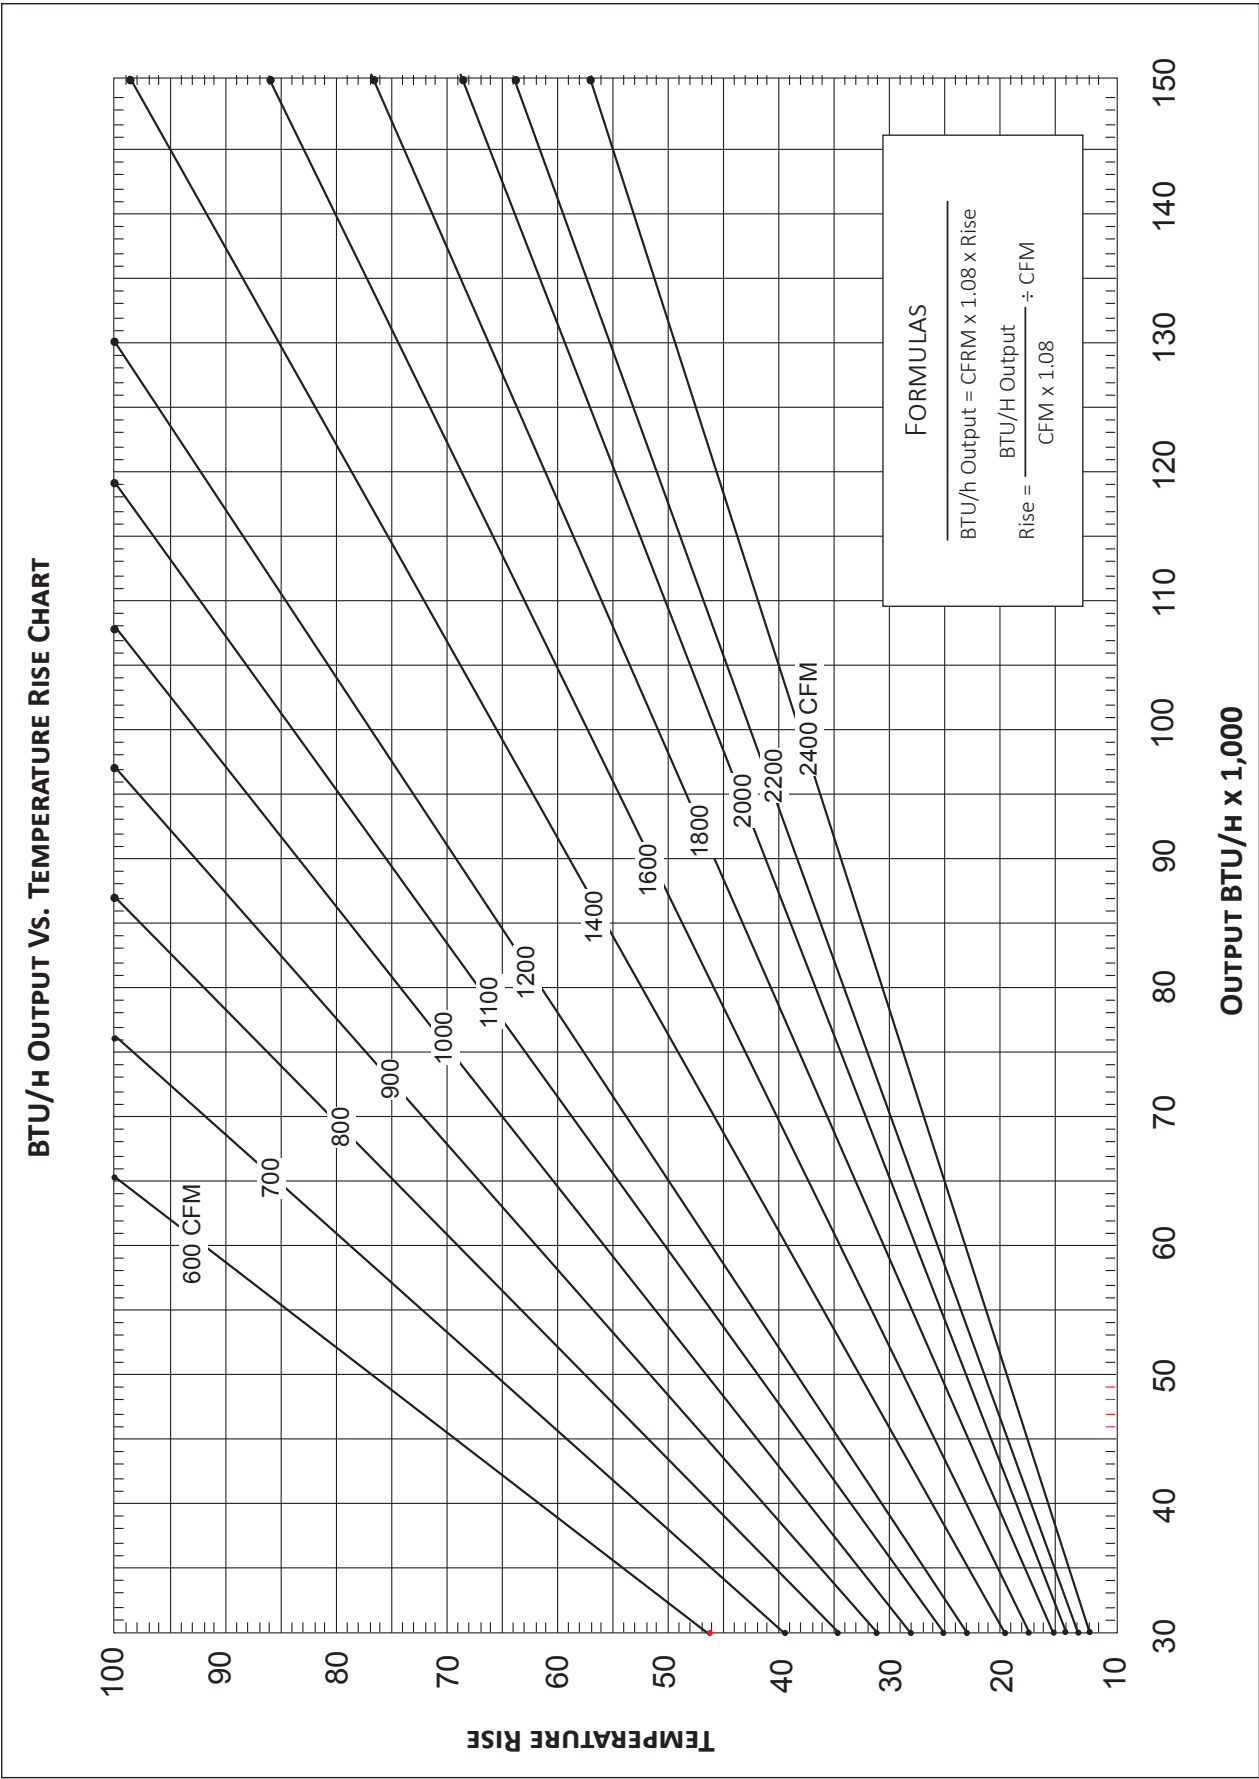

MODEL	SPEED*	VOLTS		E.S.P. (IN. OF H <sub>2</sub> O)							
				0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80
GPHH52441**	T1	230	CFM Watts	914 69	866 80	818 91	770 102	722 114	674 125	626 136	578 147
	T2 / T3	230	CFM Watts	1138 139	1079 148	1030 159	978 168	922 178	858 189	799 197	735 206
	T4 / T5	230	CFM Watts	1231 168	1179 180	1127 193	1074 205	1022 218	969 230	917 243	865 255
GPHH52441**	T1	230	CFM Watts	1005 91	961 102	918 114	874 125	831 137	787 149	744 160	700 172
	T2 / T3	230	CFM Watts	1342 190	1288 200	1236 211	1185 221	1135 230	1082 240	1010 251	949 260
	T4 / T5	230	CFM Watts	1462 241	1409 253	1357 266	1305 278	1252 291	1200 303	1147 315	1095 328
GPHH53641**	T1	230	CFM Watts	1151 132	1097 144	1042 156	988 169	933 181	879 194	824 206	770 219
	T2 / T3	230	CFM Watts	1432 224	1377 235	1329 245	1282 255	1237 263	1188 271	1141 280	1092 288
	T4 / T5	230	CFM Watts	1577 277	1525 290	1472 302	1420 314	1367 327	1315 339	1263 352	1210 364
GPHH54241**	T1	230	CFM Watts	1208 150	1162 161	1114 171	1067 180	1023 188	978 197	928 205	868 215
	T2 / T3	230	CFM Watts	1535 277	1496 287	1453 297	1409 309	1367 318	1323 327	1282 336	1242 344
	T4 / T5	230	CFM Watts	1645 285	1602 297	1560 309	1517 321	1475 333	1433 346	1390 358	1347 370
GPHH54841**	T1	230	CFM Watts	1239 152	1184 163	1146 175	1091 184	1049 194	1001 205	948 220	890 235
	T2 / T3	230	CFM Watts	1837 408	1789 419	1748 432	1706 442	1665 454	1623 464	1577 471	1531 480
	T4 / T5	230	CFM Watts	2002 498	1935 521	1885 516	1827 534	1767 551	1732 567	1669 571	1618 574
GPHH56041**	T1	230	CFM Watts	1555 242	1485 248	1425 257	1375 264	1329 274	1277 284	1221 294	1167 305
	T2 / T3	230	CFM Watts	1986 472	1933 479	1874 488	1817 496	1770 503	1730 508	1689 515	1645 526
	T4 / T5	230	CFM Watts	2049 506	1948 522	1914 528	1851 548	1811 544	1770 548	1738 556	1685 568

1.Data shown is dry coil. Wet coil pressure drop is approx.

2.Data shown does not include filter pressure drop, approx. 0.08" H<sub>2</sub>O.

3.Reduce airflow by 2% for 208V operation.

4.For high static applications, see blower performance table above for selecting appropriate speed tap.

**HEAT KIT ELECTRICAL DATA (BLOWER ONLY, HEAT MODE)**

MODEL AND HEAT KIT USAGE	CIRCUIT #1		CIRCUIT #2		SINGLE-POINT KIT		ACTUAL kW / BTU@ 240V
	MCA <sup>1</sup>	MOD <sup>2</sup>	MCA <sup>1</sup>	MOD <sup>2</sup>	MCA <sup>1</sup>	MOP <sup>2</sup>	
<b>GPHH52441**</b>	4.3	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	46	50	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	58	60	7 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	71	80	9.5 / 32,400
<b>GPHH53041**</b>	4.3	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	48	50	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	60	60	7 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	73	80	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	97	100	14.25 / 48,600
<b>GPHH53641**</b>	4.3	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	51	60	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	63	70	7 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	76	80	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	101	110	14.25 / 48,600
<b>GPHH54241**</b>	4.3	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	53	60	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	65	70	7 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	78	80	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	102	110	14.25 / 48,600
<b>GPHH54841**</b>	5.4	---	---	---	--	--	----
HKP-20C	43 / 49	45 / 50	43 / 49	45 / 50	127	150	19.0 / 64,800
HKP-05C*	21 / 25	25 / 25	---	---	59	70	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	71	80	7 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	84	90	9.5 / 32,400
<b>GPHH56041**</b>	43 / 49	45 / 50	21 / 25	25 / 25	109	110	14.25 / 48,600
HKP-20C	43 / 49	45 / 50	43 / 49	45 / 50	134	150	19.0 / 64,800
HKP-05C*	21 / 25	25 / 25	---	---	59	70	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	71	80	7 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	84	90	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	109	110	14.25 / 48,600

<sup>1</sup> Minimum Circuit Ampacity @ 208 / 240 V



<sup>2</sup> Maximum Overcurrent Protection Device @ 208 / 240 V

\* Revision level that may or may not be designated

C Circuit breaker option


^ Heat Kit requires three-phase power supply

HKP-15C and HKP-20C replace HKR-15C and HKR-20C respectively to meet new UL1995 requirements.

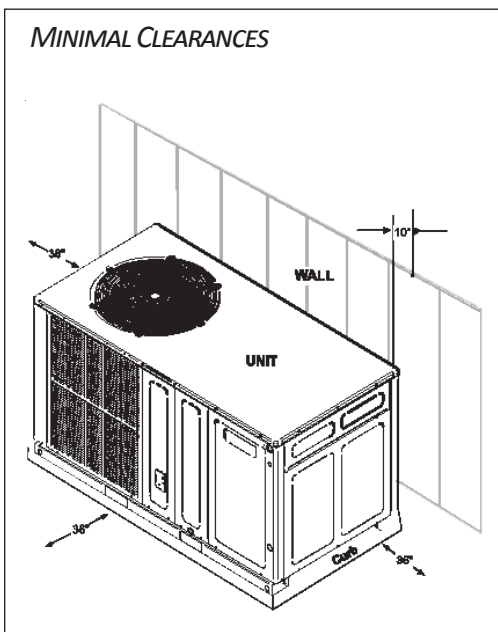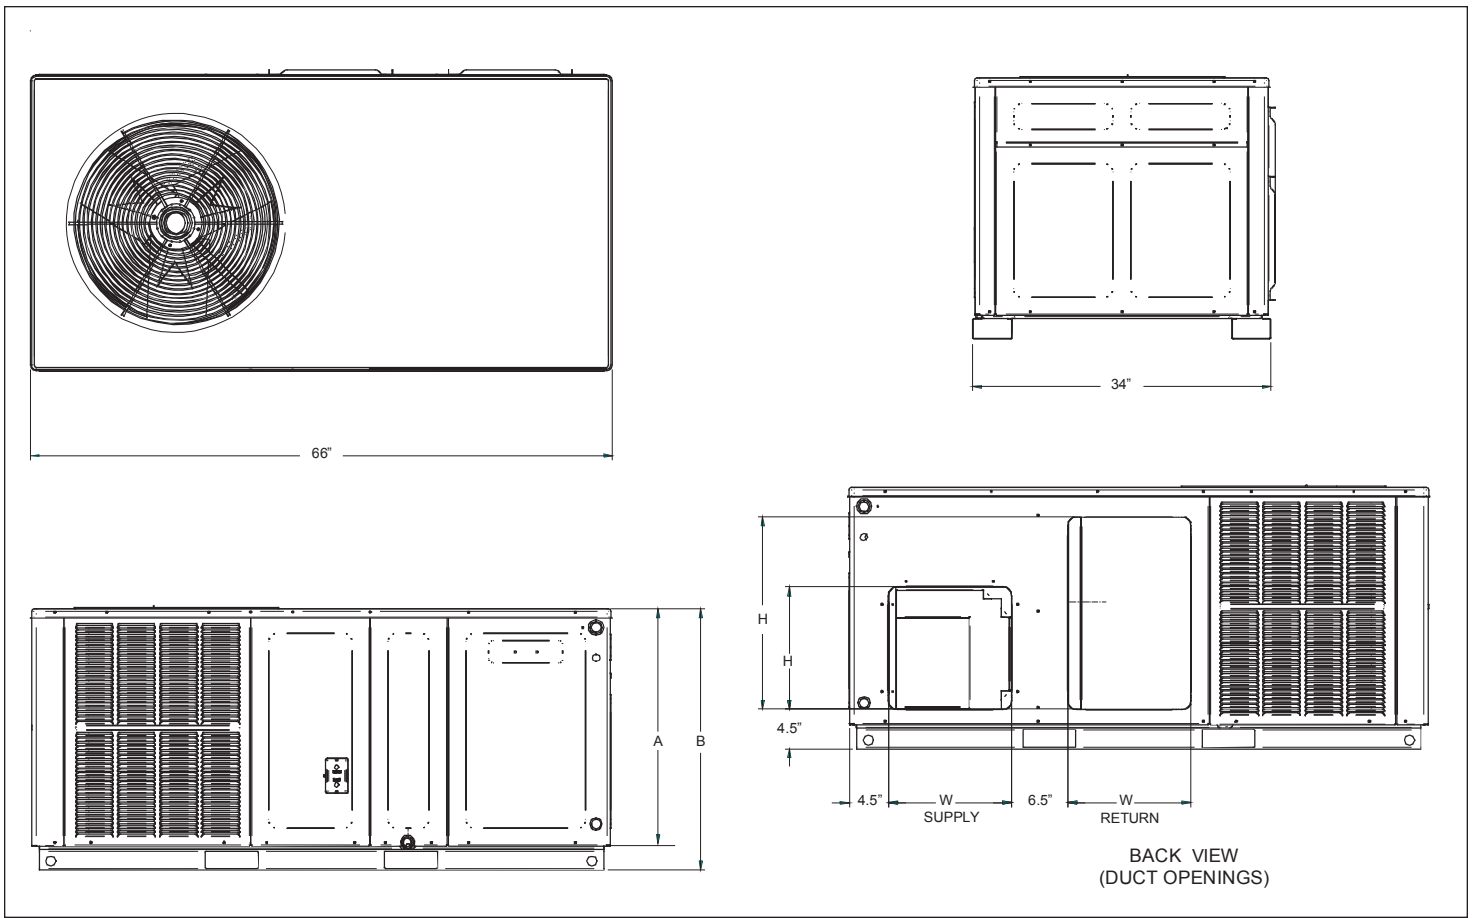

MODEL	UNIT DIMENSIONS				CHASSIS SIZE
			HEIGHT		
	W	D	A	B	
GPHH52441**	66	34	27 1/2	30	Small
GPHH53041**	66	34	27 1/2	30	Small
GPHH53641**	66	34	32 1/2	35	Medium
GPHH54241**	66	34	32 1/2	35	Medium
GPHH54841**	66	34	32 1/2	35	Medium
GPHH56041**	66	34	36	38 1/2	Large


MODEL	DUCT OPENINGS			
	SUPPLY		RETURN	
	W	H	W	H
GPHH52441**	14	14	14	22
GPHH53041**	14	14	14	22
GPHH53641**	14	14	14	24
GPHH54241**	14	14	14	24
GPHH54841**	14	14	14	24
GPHH56041**	14	14	14	24

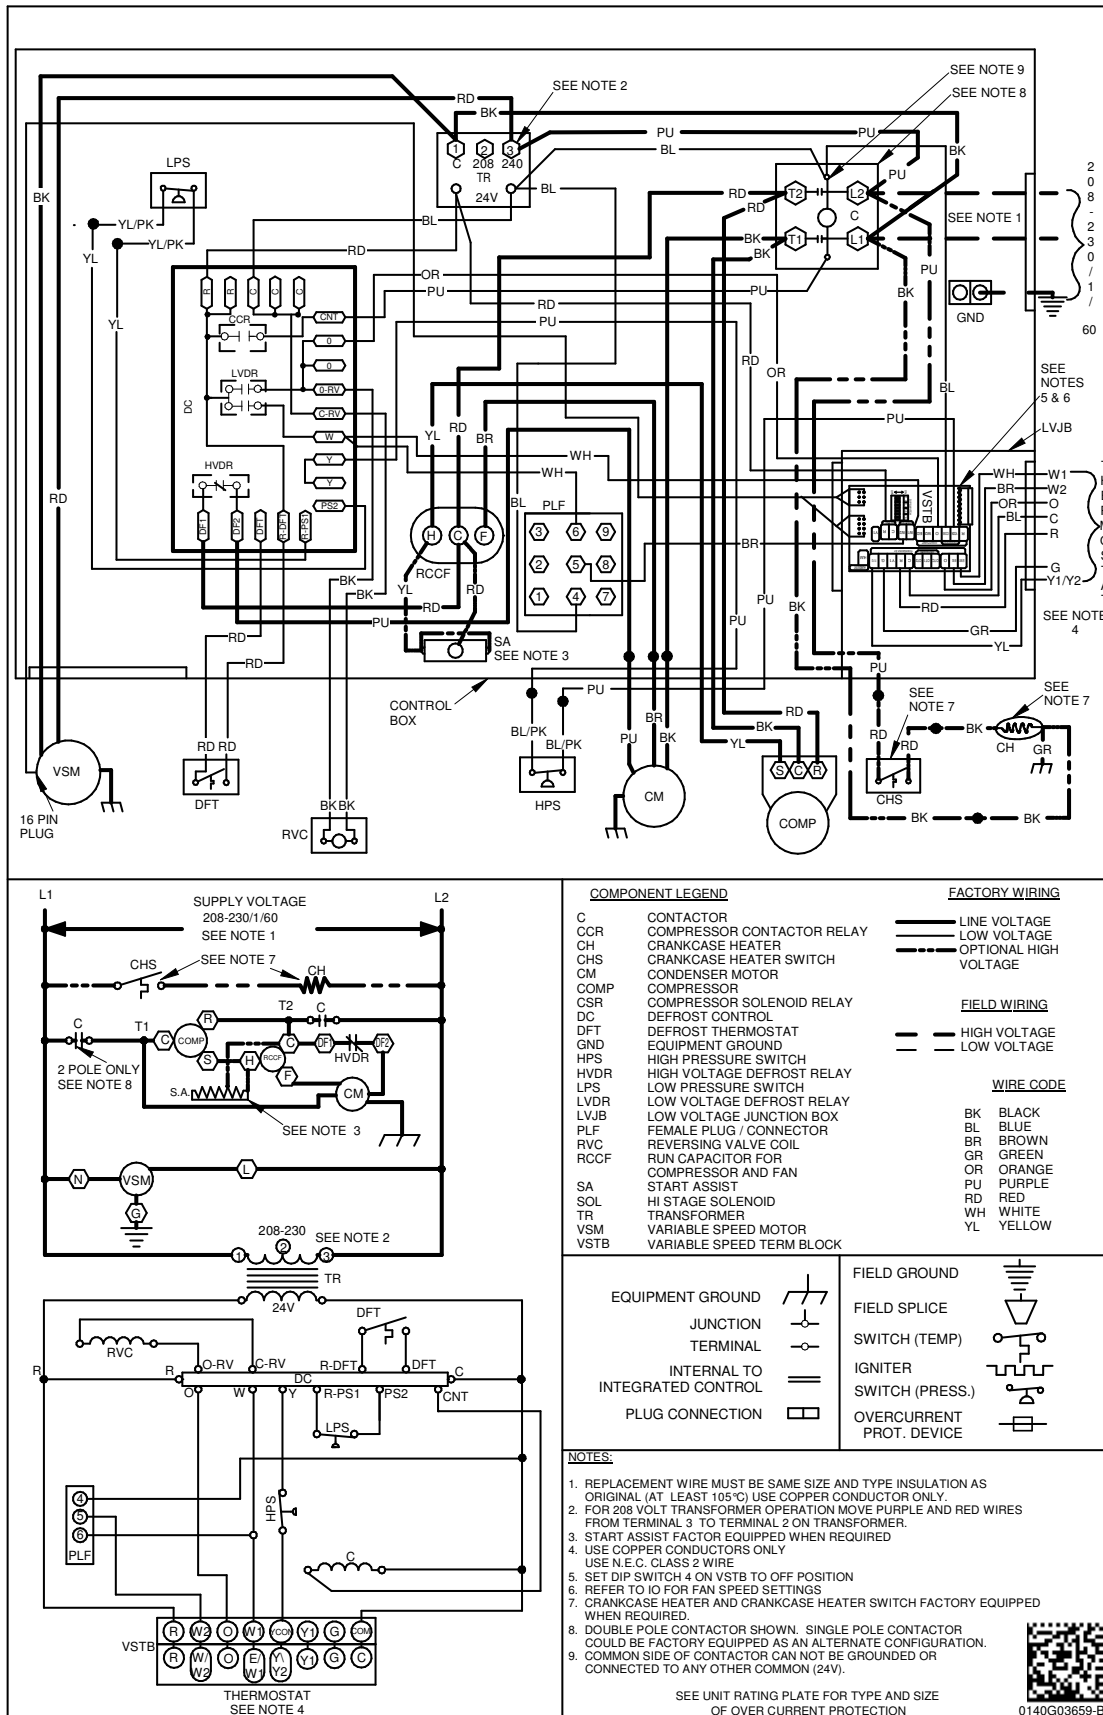

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

**WARNING**

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

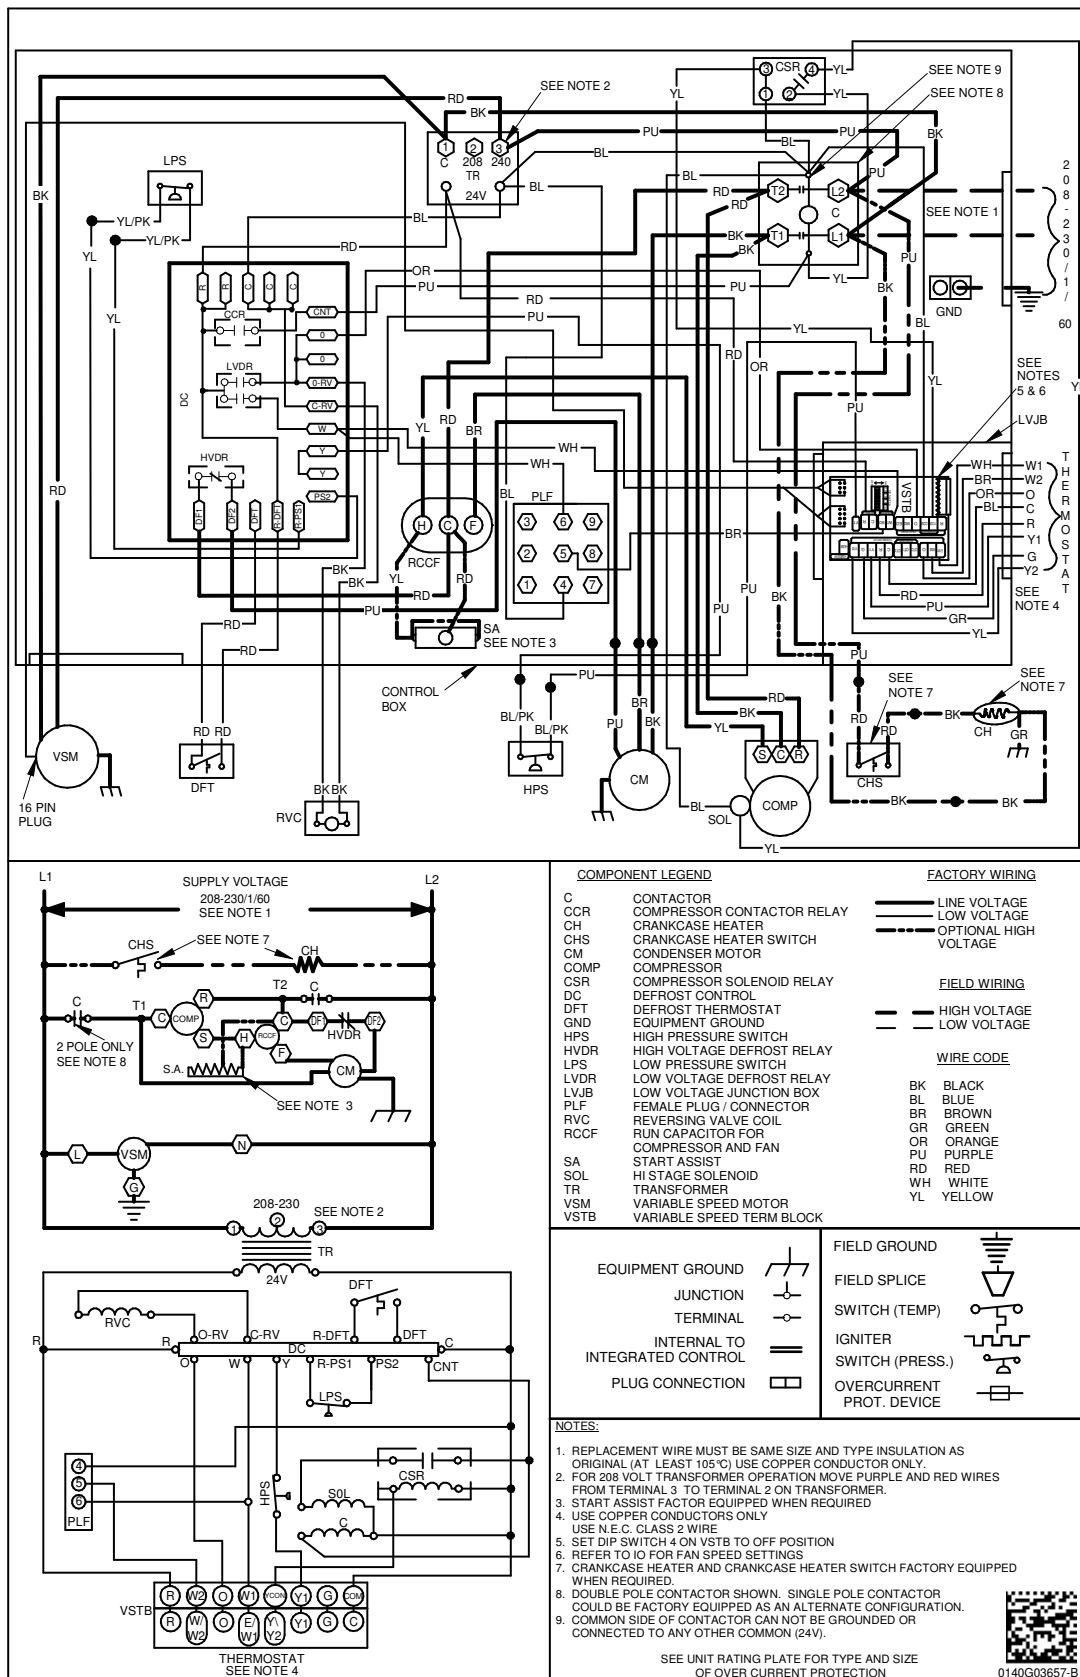

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

## ⚠ WARNING

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



ACCESSORY DESCRIPTION	ITEM NUMBER	
	SMALL CHASSIS	MEDIUM/LARGE CHASSIS
Downflow Economizer (use w/PCCP roof curb)	DDNECNJPCHHA	DDNECNJPCHHA
Downflow Plenum Kit (use w/PCCP roof curb)	PCP101-103	PCP101-103
Downflow Plenum Kit (R-8) (use w/PCCP roof curb)	PCP101-103 R8	PCP101-103 R8
Elbow Flashing w/R-8 Liner	PCEF101-103	PCEF101-103
Economizer Wiring Harness (2 - 3.5 Ton)	0259G00215	0259G00215
Economizer Wiring Harness (4 - 5 Ton)	N/A	0259L00411
External Horizontal Filter Rack	DPHFRA	DPHFRA
Horizontal Economizer	DHZECNJPCHM	DHZECNJPCHM
Inline Fuse Kit	INFKPKG01	INFKPKG01
Isolation Relay Kit (req'd with Economizer)	IRKT-01	IRKT-01
Manual Damper (use with PCP101-103)	PCMD101-103	PCMD101-103
Manual Damper - Horizontal	GPHMD101-103	GPHMD101-103
Motorized Damper (use with PCP101-103)	PCMDM101-103	PCMDM101-103
Outdoor Thermostat & Emergency Heat Relay Kit	OT/EHR18-60	OT/EHR18-60
Outdoor Thermostat Kit w/ Lockout Stat	OT18-60A	OT18-60A
Roof Curb	PCCP101-103	PCCP101-103
Square to Round Downflow (use w/PCCP roof curb)	SQRPC101	SQRPC102-103
Square to Round Horizontal	SQRPCH101	SQRPCH102-103

### ***SINGLE-POINT KIT ACCESSORY KITS***

Select the single-point kit accessory based on the unit model.

MODEL	SINGLE-POINT KIT
GPHH52441**	SPK-30
GPHH53041**	SPK-35
GPHH53641**	SPK-40
GPHH54241**	SPK-45
GPHH54841**	SPK-50
GPHH56041**	SPK-60

[illegible]

