


Full Port Threaded Ball Valve

Lead Free FNPT x FNPT

FEATURES

- Blow-Out Proof Stem Design- Ensures a safe, reliable seal
- Built for versatility- Can withstand temperatures from -20°F to 300°F for use in a wide-variety of systems.
- Rated for Durability- Has a water, oil, and gas rating of 600 psi and working steam pressure of 150 psi

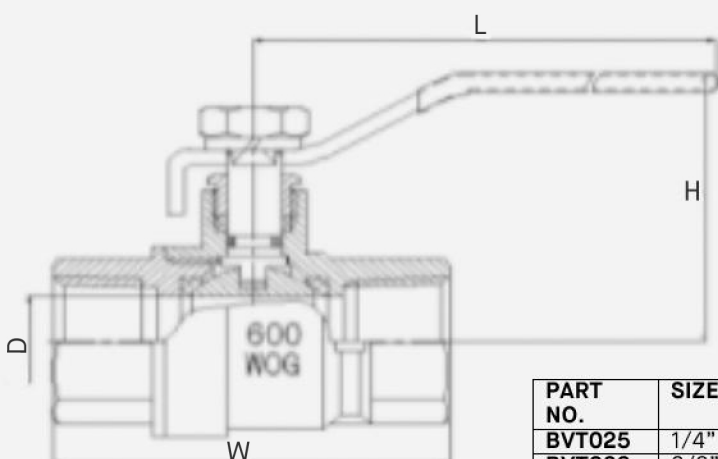

PART NO.	SIZE	D	L	H	W	Cv	Wt. (lbs)
BVT025	1/4"	0.394	3.46	1.68	1.73	8.23	0.306
BVT038	3/8"	0.394	3.46	1.68	1.73	8.23	0.302
BVT050	1/2"	0.591	3.46	1.81	2.24	18.55	0.445
BVT075	3/4"	0.748	4.29	2.09	2.52	29.76	0.750
BVT100	1"	0.984	4.29	2.25	2.97	51.55	1.140
BVT125	1-1/4"	1.259	5.63	2.52	3.44	84.42	1.755
BVT150	1-1/2"	1.574	5.63	2.74	3.88	131.93	2.412
BVT200	2"	1.949	5.63	3.03	4.29	200.35	3.380
BVT250	2-1/2"	2.520	7.76	4.25	5.53	338.43	7.030
BVT300	3"	2.894	8.19	4.58	6.14	445.44	9.656
BVT400	4"	3.839	9.25	5.49	7.79	783.88	18.305