



24V Interface for Third-Party Thermostat

FEATURES

- Control the Ductless System using a third-party thermostat¹
- One 24V Interface Kit per indoor head²
- Single and multi-zone applications
- Keeps the Inverter compressor operating as a variable-speed system³
- Rated for outdoor and indoor mounting
- Dry mode contact for active dehumidification control
- Remote on/off contact
- Auxiliary heat control through the thermostat⁴
- Diagnostic code display LEDs
- Power supplied through the outdoor unit

COMPATIBLE WITH:

- 40MPHA High Wall
- 40MAQ High Wall
- 40MHH High Wall
- 40MBCQ Cassette
- 40MBDQ Ducted
- 40MBFQ Console

KSAIC0301230 Ductless Indoor + Outdoor Single Zone 208–230V

KEY FEATURES:

Maintain Inverter Compressor Technology

The new 24V Interface keeps the Inverter compressor operating as a variable-speed system when using a third-party thermostat, making adjustments to maintain more consistent operation.

Easy & Flexible Installation

Experience quick and easy installation between either a single or multi-zone outdoor unit and the fan coil. The interface can be installed either indoors or outdoors.

Consumer Choice & Control

Consumers can choose the type of thermostat they want to use without adversely affecting the efficiency or performance of their Ductless Systems.

CONTROLS

Wireless Remote Controller included with indoor unit

Wired Remote Controller KSACN0401AAA
(7-Day Programmable) (Optional)

ACCESSORIES:


- 115V Transformer RCD#11203103000393
(Used only on Ductless Systems with 115V power.)



COMPATIBILITY:

Compatibility Table				
Type of Indoor Unit	Indoor Family Name	Single Zone Outdoor Family Name	Multi-Zone Outdoor Family Name	208/230V
High Wall	40MPHA	38MPRA	38MGR	All Sizes
	40MAQ	38MA*R	38MGR	All Sizes
	40MHH	38MHR	38MGR	All Sizes
Cassette	40MBCQ	38MA*R	38MGR	All Sizes
Ducted	40MBDQ	38MA*R	38MGR	All Sizes Except Size 58 (See Note)
Console	40MBFQ	38MA*R	38MGR	All Sizes Except Sizes 12 and 58 (See Note)

Note: The indoor unit requires an updated control board for compatibility with the 24V Interface Kit. High Wall units starting with Serial #4316V10001 are shipped with the compatible control board. Ducted units starting with Serial #4616V10001 are shipped with the compatible control board. For other model numbers not shown on the table above, please contact your ductless representative. Ducted size 58 Console sizes 12 and 58 starting with serial #1419V1001 are shipped with compatible control board.

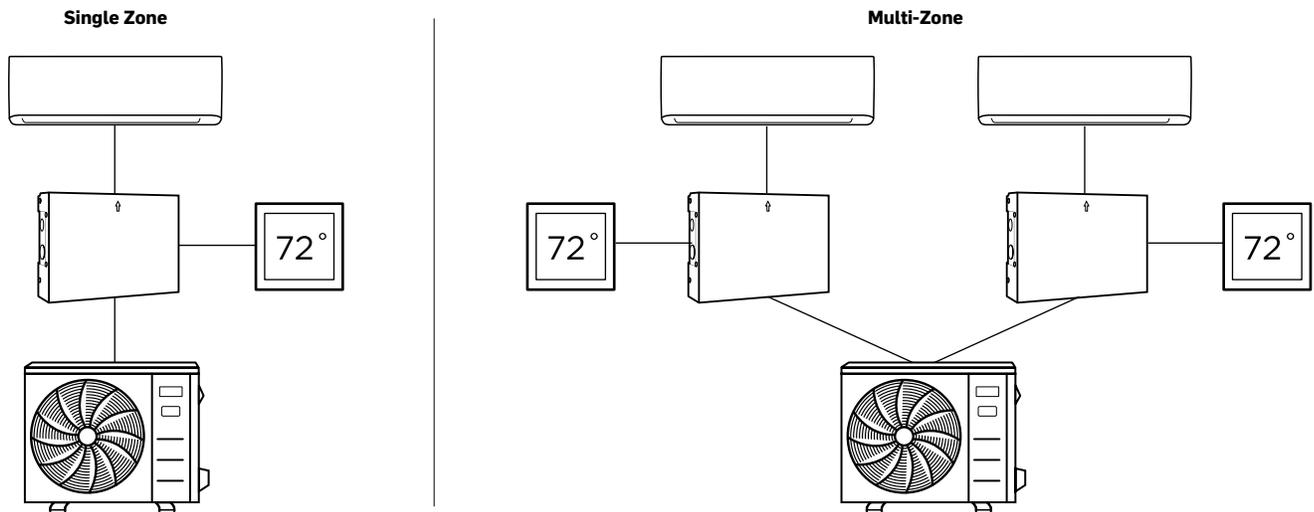

Notes:

- ¹ Third-party thermostats used with the 24V Interface Kit will replace the wireless Remote Controller included with the unit. Consult with dealer for more information.
- ² When using in a Multi-Zone System not all the indoor heads require a 24V Interface Kit.
- ³ A conventional 5-wire thermostat is required.
- ⁴ A secondary output is necessary for auxiliary heat control.

Visit our website at carrierductless.com

