

## Inverter Driven Heat Pump

## 15,000 BTU Wall Mount Type

Job Name \_\_\_\_\_  
 Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Submitted To \_\_\_\_\_  
 Submitted By \_\_\_\_\_  
 Reference \_\_\_\_\_

Date \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Construction \_\_\_\_\_  
 Unit No \_\_\_\_\_  
 Drawing No \_\_\_\_\_

### PRODUCT FEATURES

- Wireless Remote Controller Included
- Minimum Heat Mode
- Automatic Airflow Adjustment
- Auto/Cool/Dry/Fan/Heat/modes
- Weekly & 24 Hr Timer
- Powerful & Economy Mode
- Auto Changeover
- Cold Air Prevention



### MODEL NUMBERS

Indoor Unit	ASUH15LPAS
Nominal Capacity	14,000

### LINESET REQUIREMENTS

Connection Method		Flare
Liquid	in (mm)	Ø1/4 (Ø6.35)
Gas		Ø1/2 (Ø12.7)
Drain hose	Material	PP+HDPE
	in	Ø17/32 (I.D.), Ø19/32 to 21/32 (O.D.)
	mm	Ø13.8 (I.D.), Ø15.0 to 16.8 (O.D.)

### INDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	10-5/8 x 32-13/16 x 8-3/4
	mm	270 x 834 x 222
Gross (H x W x D)	in	10-7/8 x 36 x 13-1/16
	mm	277 x 914 x 332
Net Weight	lb (kg)	22 (10.0)
Gross Weight		29 (13.0)

### ELECTRICAL SPECIFICATIONS

Voltage/Frequency/Phase		208/230 V ~ 60 Hz
Voltage Range		187-264 V
Running Current	A	0.35
Input Power	W	42

### SOUND PRESSURE

Indoor Unit	Cooling	High	dB (A)	43
		Medium		36
		Low		30
		Quiet		21
	Heating	High		44
		Medium		39
		Low		33
		Quiet		24

### FAN DATA

Airflow Rate	Cooling	High	CFM (m3/h)	453 (770)
		Medium		353 (600)
		Low		265 (450)
		Quiet		182 (310)
	Heating	High		483 (820)
		Medium		388 (660)
		Low		306 (520)
		Quiet		200 (340)

### Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

### ENCLOSURE

Enclosure	Material	Polystyrene
	Color	White

### ACCESSORIES

UTY-RNRUZ Series	Wired Remote Controller
UTY-RSRY	Simple Remote Controller
UTY-RHRY	Simple Remote Controller
UTY-TWRXZ2*	Communication Kit
UTY-TFSXF1	Wireless LAN Interface
UTY-TTRXZ1	24V Thermostat Interface
UTY-VMSX	MODBUS Converter
FJ-AC-BAC-1L	BACnet Gateway
UTY-XWZX	External Connect Kit

\* Required to connect wired remote controller to indoor unit.



Effective Date:

2/9/2022

Version ASUH15LPAS -2022A


Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

## Inverter Driven Heat Pump

## 15,000 BTU Wall Mount Type

## DIMENSIONS

Units: In. (mm)

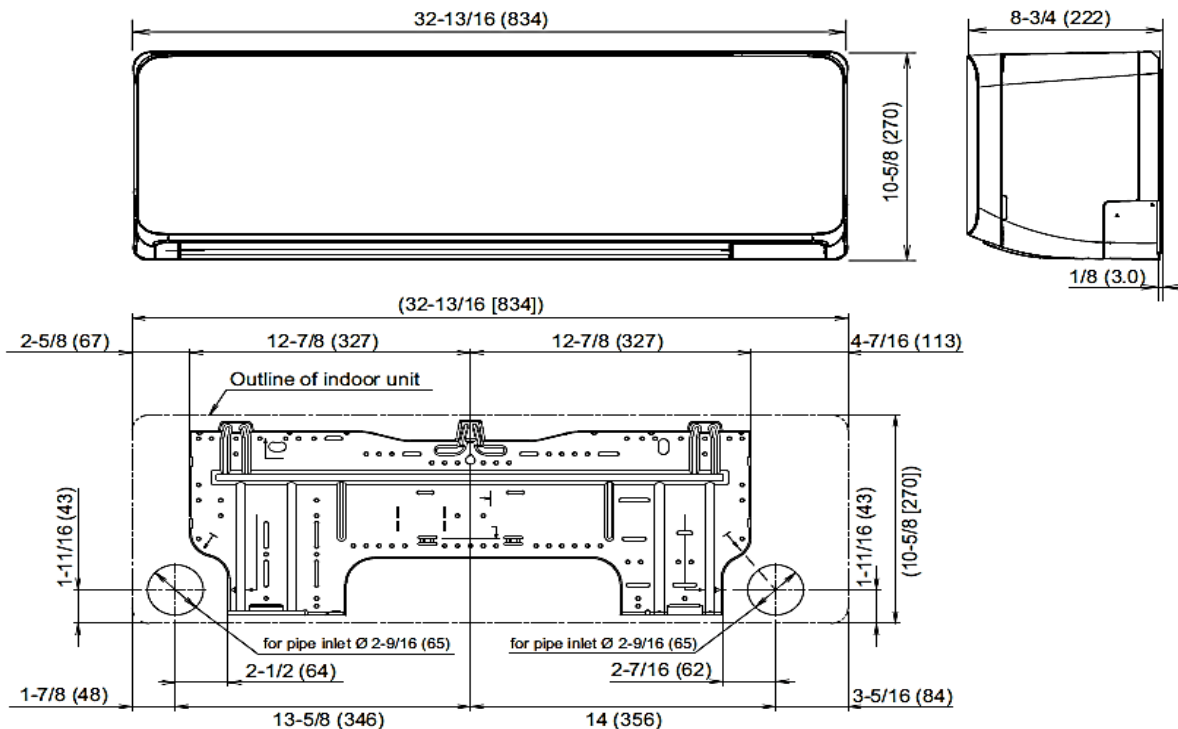

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2022 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:  
Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m). Height difference: 0ft. (0m) (Outdoor unit – indoor unit).