

Inverter Driven Heat Pump

7,000 BTU Wall Mount Type

Job Name _____
Location _____
Engineer _____
Submitted To _____
Submitted By _____
Reference _____

Date _____
Approval _____
Construction _____
Unit No _____
Drawing No _____

PRODUCT FEATURES

Wireless remote controller
Auto|Cool|Dry|Fan|Heat modes
24 Hr. timer
Powerful mode
Cold prevention
Auto Restart



MODEL NUMBERS				
Indoor Unit			ASU7RLF1	
Nominal Capacity			7,000	
LINESET REQUIREMENTS				
Connection Method			Flare	
Liquid	in (mm)		Ø 1/4 (Ø 6.35)	
Gas			Ø 3/8 (Ø 9.52)	
Drain hose	Material	PP+HDPE		
	in	Ø 9/16(I.D.), Ø 5/8 to Ø 11/16(O.D.)		
	mm	Ø 13.8(I.D.), Ø 15.8 to Ø 16.7(O.D.)		
INDOOR DIMENSIONS & WEIGHT				
Net (H × W × D)	in (mm)	10-9/16 × 33-1/16 × 8 (268 × 840 × 203)		
Gross (H × W × D)		10-5/8 × 34-13/16 × 14-3/4 (270 × 884 × 336)		
Net Weight	lb (kg)	19 (8.5)		
Gross Weight		23 (10.5)		
ELECTRICAL SPECIFICATIONS				
Voltage/Frequency/Phase			208/230 V ~ 60 Hz	
Available Voltage Range			187–253 V	
Running Current		A	0.13	
Input Power		W	15	
SOUND PRESSURE				
Indoor Unit	Cooling	HIGH	dB (A)	36
		MED		32
		LOW		29
		QUIET		21
	Heating	HIGH		36
		MED		32
		LOW		29
		QUIET		22
FAN DATA				
Indoor Unit Airflow rate	Cooling	HIGH	CFM (m3/h)	330 (560)
		MED		294 (500)
		LOW		253 (430)
		QUIET		182 (310)
	Heating	HIGH		330 (560)
		MED		294 (500)
		LOW		253 (430)
		QUIET		194 (330)

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

ENCLOSURE

Enclosure	Material	Polystyrene
	Color	White

ACCESSORIES

UTY-TTRXZ1	24V Thermostat Interface
UTY-XCBXZ2	Interface Kit
UTY-RNNUM	Wired Remote
UTY-RVNUM	Wired Remote w/backlight
UTY-RSNUM	Simple Remote
UTY-XWZXZ5	Dry Contact Wire Kit
FJ-RC-WIFI-1NA	Intesis Wired WiFi module
FJ-IR-WIFI-1NA	Intesis IR WiFi module
UTY-TFNXZ2	WiFi Interface Module

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation
<https://connect.fujitsugeneral.com>

Effective Date: 1/10/2023

Fujitsu General America, Inc. • 340 Changebridge Rd, Pine Brook, NJ 07058 • Toll Free: (888) 888-3424 • www.fujitsugeneral.com


Inverter Driven Heat Pump

7,000 BTU Wall Mount Type


DIMENSIONS:

Units: In. (mm)

Wall Bracket Data:

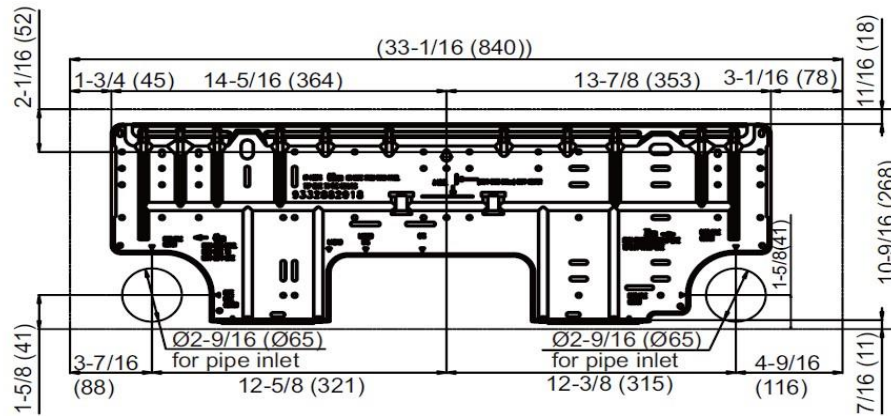

Indoor Unit:

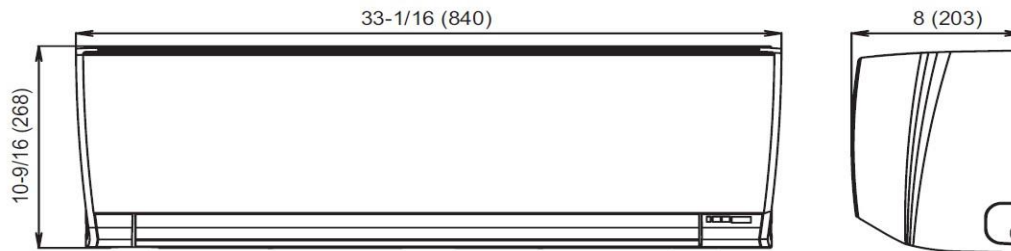

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2022 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:

Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).