

Inverter Driven Heat Pump

24,000 BTU Single Zone Wall Mounted System

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

Auto Changeover
 Weekly & 24 hr. Timer
 Auto Louver: Up/Down
 Minimum Heat Mode (Wi-Fi Adapter required)
 Wireless Remote Control Included
 Auto Restart
 Economy Mode
 Energy Saving Program (ESP)
 Outdoor Unit Low Noise Schedule



MODEL NUMBERS

Indoor Unit	ASUH24LPAS
Outdoor Unit	AOUH24LPAS1
System	24LPAS1

EFFICIENCIES

SEER	19
SEER 2	19
EER	9.2
EER 2	9.2
HSPF	11
HSPF 2 (IV) / HSPF 2 (V)	9.8/7.6
COP	kW/kW 3.4
COP	Btu/hW 11.6
COP2	kW/kW 3.4
COP2	Btu/hW 11.6

OUTDOOR TEMPERATURE OPERATION RANGE

Cooling	*F(°C)	14 to 115 (-10 to 46)
Heating*		*5 to 75 (-15 to 24)

CAPACITIES

Cooling	Rated	Btu/h	24000
	Min.-Max.		4,000-24,400
Heating	Rated	Btu/h	24000
	Min.-Max.		2,900-29,000

LINESET REQUIREMENTS

Connection Method	Flare		
Liquid	in (mm)		Ø 1/4 (Ø 6.35)
Gas			Ø 1/2 (Ø 12.7)
Pre-charge length	ft (m)		49 (15)
Minimum Length			16 (5)
Max. length			66 (20)
Max. height difference			49 (15)

INDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in (mm)	11 x 38-9/16 x 9-7/16 (280 x 980 x 240)
Gross (H x W x D)		12-11/16 x 42-7/16 x 13-5/8 (322 x 1,078 x 346)
Net Weight	lb (kg)	29 (13)
Gross Weight		37 (17)

OUTDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in (mm)	24-7/8 x 31-7/16 x 11-7/16 (632 x 799 x 290)
Gross (H x W x D)		27-1/4 x 37 x 14-3/4 (692 x 940 x 375)
Net Weight	lb (kg)	86 (39)
Gross Weight		95 (43)

* System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES

UTY-RNRUZ*	Wired remote controller
UTY-RSRY	Simple remote controller
UTY-RHRY	Simple remote controller
UTY-XWZX	External Connect Kit
UTY-XWZXZ5	External Connect Kit
UTY-XCSXZ2	External Input and Output PCB
UTY-TWRXZ2	Communication Kit
UTY-TFSXF1	Wireless LAN adapter
UTY-VMSX	Modbus Converter
UTY-TTRXZ1	24V Thermostat Converter
UTY-VTGX	Network Converter



This system combination is Energy Star qualified



+App available in Apple® App Store and Google® Play Store.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Effective Date: 04/18/2024


Fujitsu General America, Inc. • 342 Changebridge Rd, Pine Brook, NJ 07058 • Toll Free: (888) 888-3424 • www.fujitsugeneral.com

24,000 BTU Single Zone Wall Mounted System


DIMENSIONS

Units: In. (mm)

Indoor Unit

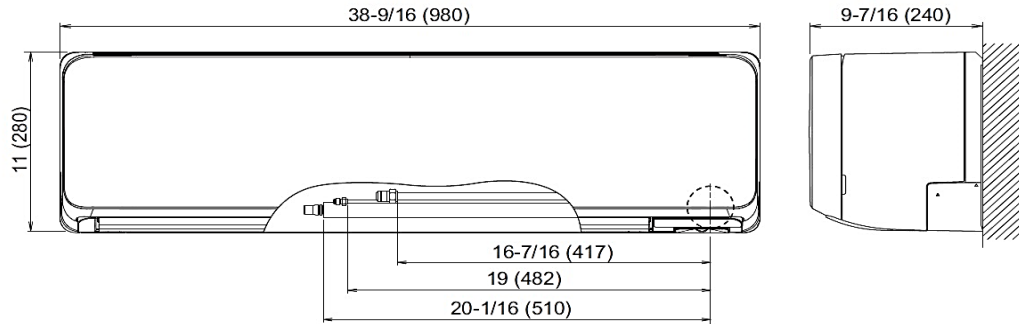

Outdoor Unit

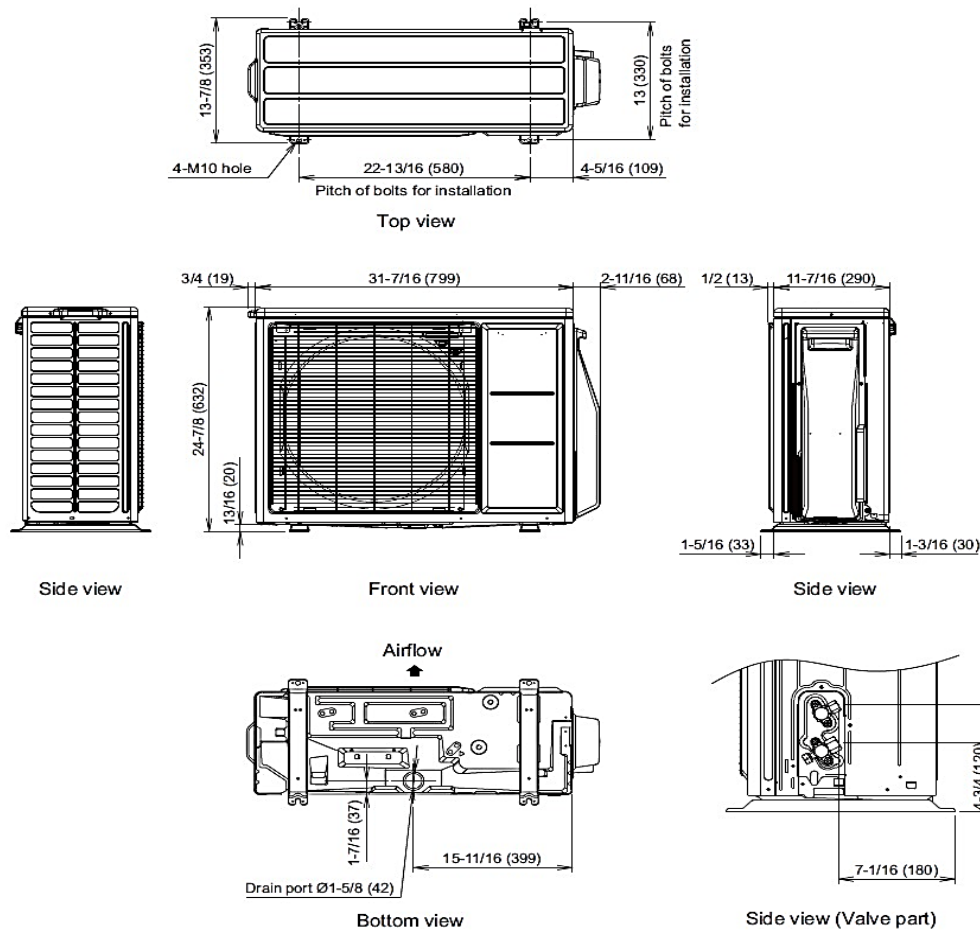

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2024 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).