

Inverter Driven Heat Pump

30,000 BTU Mid Static Ducted

Job Name \_\_\_\_\_  
 Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Submitted To \_\_\_\_\_  
 Submitted By \_\_\_\_\_  
 Reference \_\_\_\_\_

Date \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Construction \_\_\_\_\_  
 Unit No \_\_\_\_\_  
 Drawing No \_\_\_\_\_

**PRODUCT FEATURES**

- Up To 0.8" WC
- Two wire or Three wire Controls
- Automatic Airflow Adjustment
- Heating operation rated down to -5°F outdoor temperature
- Quiet Operation (as low as 29 decibels)
- Long Lineset Lengths (up to 164')



MODEL NUMBERS			
Indoor Unit	ARU30RGLX		
Outdoor Unit	AOU30RGLX		
System	30RGLXD		
EFFICIENCIES			
SEER	16.5		
SEER 2	15.6		
EER	10.6		
EER 2	10		
HSPF	10.4		
HSPF2 (IV) / HSPF2 (V)	9.1/7.3		
COP	kW/kW	3.78	
COP	Btu/hW	12.9	
COP2	kW/kW	3.64	
COP2	Btu/hW	12.4	
OUTDOOR TEMPERATURE OPERATION RANGE			
Cooling	*F(*C)	-5 to 115 (-21 to 46)	
Heating		-5 to 75 (-21 to 24)	
CAPACITIES			
Cooling	Rated	Btu/h	30000
	Min.-Max.		9,600-35,000
Heating	Rated		32000
	Min.-Max.		9,200-39,000
LINESET REQUIREMENTS			
Connection Method		Flare	
Liquid	in (mm)	Ø3/8 (9.52)	
Gas		Ø5/8 (15.88)	
Pre-charge length	ft (m)	66 (20)	
Minimum Length		16 (5)	
Max. length		164 (50)	
Max. height difference		98 (30)	
INDOOR DIMENSIONS & WEIGHT			
Net (H x W x D)	in (mm)	11-13/16 x 39-3/8 x 27-9/16 (300 x 1,000 x 700)	
Gross (H x W x D)		15-3/4 x 48-3/4 x 34-7/16 (400 x 1,238 x 875)	
Net Weight	lb (kg)	93 (42)	
Gross Weight		110 (50)	
OUTDOOR DIMENSIONS & WEIGHT			
Net (H x W x D)	in (mm)	32-11/16 x 35-7/16 x 13 (830 x 900 x 330)	
Gross (H x W x D)		39-3/8 x 41-5/16 x 17-1/2 (1,000 x 1,050 x 445)	
Net Weight	lb (kg)	134 (61)	
Gross Weight		152 (69)	

**Warranty Information**



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

**ACCESSORIES**

UTY-RNRUZ-Series	Wired Remote Controller
UTY-RSRY	Simple Remote Controller
UTY-RHRY	Simple Remote Controller
UTY-LBTUM	IR Receiver Kit with Wireless Remote Controller
UTY-XSZX	Remote Sensor Unit
UTD-LFNB	Long-life Filter
UTY-XWZXZG	External Connect Kit
UTY-XCSX	External Input and Output PCB
UTY-TFSXZ2	WLAN Adapter
UTY-VMSX	Modbus Converter
UTY-TTRXZ1	Thermostat Converter

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Effective Date: 3/6/2023


FAN DATA			
Indoor Unit Airflow rate	Cooling	HIGH	1,001 (1,700)
		MED	800 (1,360)
		LOW	700 (1,190)
		QUIET	630 (1,070)
	Heating	HIGH	1,001 (1,700)
		MED	800 (1,360)
		LOW	700 (1,190)
		QUIET	630 (1,070)
Outdoor Unit Airflow rate	Cooling	2,119 (3,600)	
	Heating	2,119 (3,600)	
SOUND PRESSURE			
Indoor Unit	Cooling	HIGH	38
		MED	34
		LOW	30
		QUIET	29
	Heating	HIGH	38
		MED	34
		LOW	30
		QUIET	29
Outdoor Unit	Cooling	53	
	Heating	55	
REFRIGERANT			
Type			R410A
Charge	lb oz	4 lb 10.1 oz	
	g	2100	
Oil Type			POE (RB68)

ELECTRICAL SPECIFICATIONS			
Voltage/Frequency/Phase		208/230 V~ 60 Hz	
Available Voltage Range		187-253 V	
Current	Cooling	Rated	13.1
	Heating	Rated	11.4
Maximum Operating Current	Cooling	A	15.6
	Heating		16.1
Starting current		11.5	
MCA		20.8	
Maximum Circuit Breaker		30	
Input Power	Cooling	Rated	kW
		Min.-Max.	
	Heating	Rated	
Power Factor	Cooling	%	99.6
	Heating		98.4
OTHER			
Moisture Removal		pints/h (L/h)	5.1 (2.4)
Energy Star		No	
Drain hose	Material	PVC	
	Tip diameter	in (mm)	Ø13/16 (20.7) (I.D.), Ø1-1/16 (26.6) (O.D.)
Operation Range	Cooling	°F (°C)	64.4 to 89.6 (18 to 32)
	Heating	%RH	80 or less
Static pressure range	Cooling	°F (°C)	60.8 to 86.0 (16 to 30)
	Heating	inWG (Pa)	0.12 to 0.80 (30 to 200)

DIMENSIONS:

Units: In. (mm)


Indoor Unit:

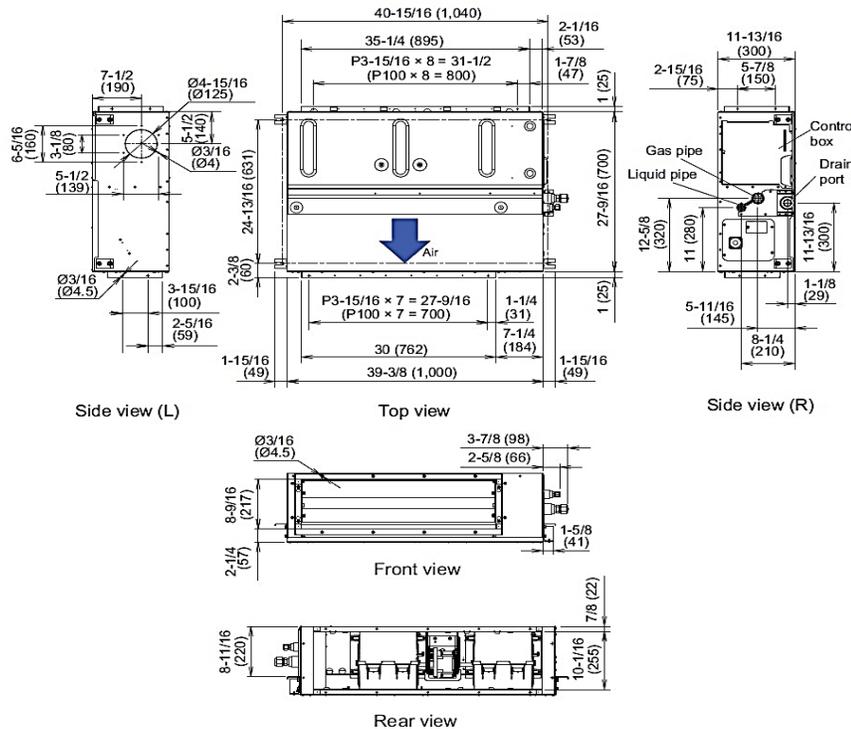

DIMENSIONS

Units: In. (mm)

Outdoor Unit

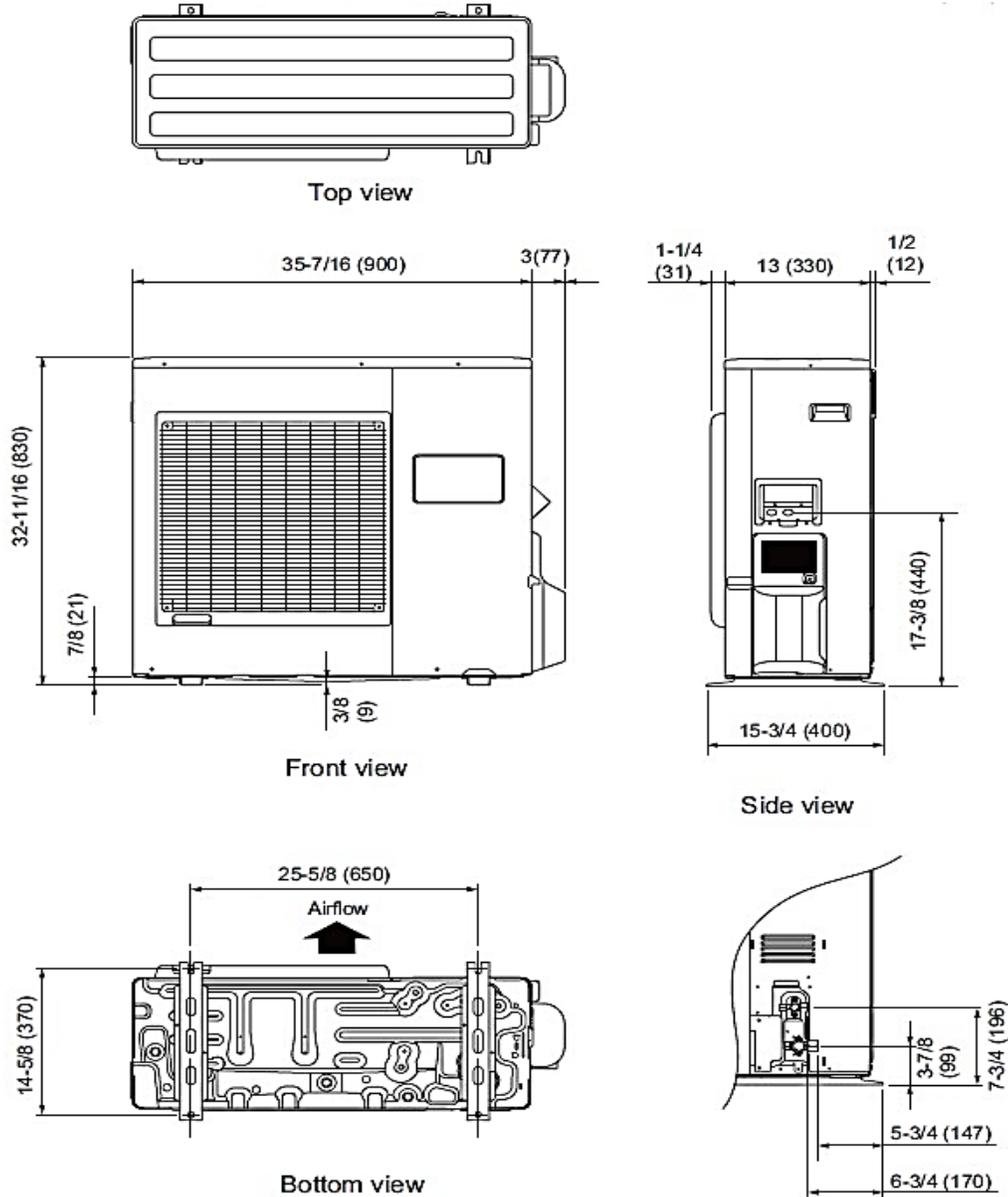

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2022 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:  
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).