

PHYSICAL DATA

COMPONENT	MODELS															
	PCG4A24		PCG4A30		PCG4A36			PCG4A42		PCG4B48			PCG4B60			
NOMINAL TONNAGE	2.0		2.5		3.0			3.5		4.0			5.0			
AHRI Cooling Performance																
Gross Capacity @ AHRI A point (MBH)	23.7		30.1		37.2			43.5		47.7			55.0			
AHRI net capacity (MBH)	22.8		29.0		34.6			41.0		45.5			52.5			
EER	11.0		11.0		11.0			11.0		11.0			11.0			
SEER	14.0		14.0		14.0			14.0		14.0			14.0			
Nominal CFM	800		1000		1200			1400		1600			2000			
System power (KW)	2.1		2.6		3.2			3.8		4.2			4.8			
Refrigerant type	R410A		R410A		R410A			R410A		R410A			R410A			
Refrigerant charge (lb-oz)	5-4		8-8		8-3			9-4		14-4			14-2			
AHRI Gas Heat Performance																
Heating model	50	75	50	75	50	75	100	75	100	65	100	125	65	100	125	
Heat input (K Btu)	50.0	75.0	50.0	75.0	50.0	75.0	100.0	75.0	100.0	65.0	100.0	125.0	65.0	100.0	125.0	
Heat output (K Btu)	40	60	40	60	40	60	80	60	80	52	80	100	52	80	100	
AFUE %	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	
No. burners	2	3	2	3	2	3	4	3	4	2	3	4	2	3	4	
No. stages	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Temperature Rise Range (°F)	40-70		40-70		35-65		40-70		40-70		40-70			40-70		
Max. Static Pressure w.c.	0.5		0.5		0.5			0.5		0.5			0.5			
Max. Outlet Air Temp. (°F)	180		180		180			180		180			180			
Gas piping connection (in.)	1/2		1/2		1/2			1/2		1/2			1/2			
Dimensions (inches)																
Length	51-1/4		51-1/4		51			51		51			51			
Width	35-3/4		35-3/4		35-3/4			35-3/4		45-3/4			45-3/4			
Height	47		47		47			49		53			55			
Operating WT. (lbs.)	359	366	379	386	415	422	426	442	446	495	503	508	522	530	535	
Compressors																
Type	Recip		Recip		Recip			Scroll		Scroll			Scroll			
Condenser Coil Data																
Face area (Sq. Ft.)	15.1		15.1		15.1			16.9		23.8			25.9			
Rows	1		2		2			2		2			2			
Fins per inch	22		22		22			22		22			22			
Tube diameter	3/8		3/8		3/8			3/8		3/8			3/8			
Circuitry Type	Interlaced		Interlaced		Interlaced			Interlaced		Interlaced			Interlaced			
Evaporator Coil Data																
Face area (Sq. Ft.)	4.6		4.6		4.6			4.6		6.3			6.3			
Rows	2		3		3			3		3			3			
Fins per inch	16		16		16			16		16			16			
Tube diameter	3/8		3/8		3/8			3/8		3/8			3/8			
Circuitry Type	Interlaced		Interlaced		Interlaced			Interlaced		Interlaced			Interlaced			
Refrigerant control	TXV		TXV		TXV			TXV		TXV			TXV			
Condenser Fan Data																
Fan diameter (Inch)	24		24		24			24		26			26			
Type	Prop		Prop		Prop			Prop		Prop			Prop			
Drive type	Direct		Direct		Direct			Direct		Direct			Direct			
No. speeds	1		1		1			1		1			1			
Motor HP each	1/4		1/4		1/4			1/4		1/3			1/3			
RPM	850		850		850			850		850			850			
Nominal total CFM	2400		2400		2400			2400		3200			3200			
Direct Drive Evaporator Fan Data																
Fan Size (Inch)	11 x 8		11 x 8		11 x 10			11 x 10		11 x 10			11 x 10			
Type	Centrifugal		Centrifugal		Centrifugal			Centrifugal		Centrifugal			Centrifugal			
Motor HP each	1/3	1/2	1/3	1/2	1/2	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	1	
RPM	1200 Max		1200 Max		1200 Max			1200 Max		1200 Max			1200 Max			
Frame size	48		48		48			48		48			48			
Filters																
Filter Size	A		A		A			A		B			B			
Quantity - Size	Field-supplied external filters must be sized so as not to exceed 300 fpm air velocity through disposable filters. For internal filter use, a filter rack kit is available. Consult the instructions supplied with that kit for replacement filter sizes. Filter sizes: A=20x20, B=20x30.															

COOLING PERFORMANCE DATA - 2 TON																
PACKAGED UNIT MODEL NO.		PCG4A24														
CONDENSER ENTERING AIR TEMPERATURE	ID CFM	1000					800					600				
	IDDB	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	IDWB	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55 / 45	T.C.	30.0	33.4	33.4	36.7	39.8	27.4	30.9	31.2	34.3	37.6	24.9	28.4	29.0	31.8	35.4
	S.C.	30.0	28.6	23.8	23.7	18.7	27.4	25.0	20.9	21.0	16.9	24.9	21.3	18.1	18.2	15.1
	K.W.	1.48	1.47	1.47	1.46	1.44	1.44	1.44	1.44	1.42	1.40	1.41	1.41	1.40	1.39	1.37
65 / 55	T.C.	25.9	29.1	28.8	32.1	35.4	25.9	28.7	28.7	31.9	35.4	25.9	28.4	28.6	31.6	35.3
	S.C.	25.6	23.6	19.9	19.9	16.0	25.7	23.6	19.7	19.8	16.0	25.9	23.5	19.5	19.7	16.0
	K.W.	1.57	1.58	1.57	1.57	1.56	1.58	1.58	1.58	1.54	1.53	1.59	1.59	1.59	1.50	1.49
75 / 63	T.C.	26.9	28.4	28.2	31.4	35.3	24.4	26.6	26.2	29.4	33.2	21.9	24.8	24.2	27.5	31.1
	S.C.	26.9	25.8	20.9	21.1	16.8	24.0	22.2	18.5	18.6	15.1	21.2	18.6	16.0	16.1	13.3
	K.W.	1.77	1.78	1.78	1.62	1.61	1.72	1.73	1.73	1.65	1.65	1.66	1.68	1.67	1.69	1.69
85 / 69	T.C.	22.0	23.8	23.4	26.5	29.9	22.3	24.1	23.7	26.8	30.2	22.6	24.4	24.1	27.2	30.5
	S.C.	21.7	20.6	17.1	17.4	13.7	22.1	20.9	17.2	17.5	13.8	22.5	21.1	17.3	17.5	13.9
	K.W.	1.86	1.87	1.87	1.89	1.95	1.85	1.86	1.86	1.84	1.88	1.84	1.86	1.86	1.79	1.81
95 / 75	T.C.	22.1	22.8	22.5	25.5	28.8	20.2	21.6	21.3	24.2	27.3	18.3	20.3	20.1	22.9	25.8
	S.C.	22.1	22.7	18.3	18.8	14.1	20.1	19.5	16.0	16.4	12.6	18.2	16.4	13.6	14.0	11.1
	K.W.	2.07	2.07	2.06	2.09	2.21	1.98	2.00	2.00	2.03	2.11	1.90	1.94	1.94	1.97	2.00
105 / 83	T.C.	19.3	19.9	19.2	22.0	24.7	17.8	18.8	18.3	21.0	23.7	16.3	17.7	17.3	20.0	22.7
	S.C.	19.3	19.8	16.4	17.2	11.9	17.8	17.4	14.4	14.9	10.8	16.2	15.1	12.4	12.7	9.8
	K.W.	2.21	2.21	2.20	2.24	2.34	2.12	2.13	2.12	2.17	2.25	2.03	2.06	2.05	2.11	2.15
115 / 89	T.C.	16.6	17.0	16.0	18.5	20.7	15.5	16.1	15.4	17.9	20.2	14.3	15.1	14.7	17.3	19.7
	S.C.	16.6	17.0	14.6	15.6	9.6	15.4	15.4	12.9	13.6	9.1	14.3	13.8	11.1	11.5	8.6
	K.W.	2.36	2.35	2.32	2.38	2.47	2.25	2.26	2.24	2.31	2.38	2.15	2.17	2.17	2.24	2.30
125 / 95	T.C.	13.9	14.1	12.8	15.1	17.6	13.1	13.4	12.4	14.8	17.2	12.3	12.6	12.0	14.5	16.7
	S.C.	13.9	14.1	12.8	14.0	9.4	13.1	13.4	11.4	12.2	8.4	12.3	12.6	9.9	10.3	7.4
	K.W.	2.50	2.49	2.45	2.53	2.59	2.39	2.39	2.36	2.45	2.52	2.27	2.29	2.28	2.37	2.45


COOLING PERFORMANCE DATA - 2.5 TON																
PACKAGED UNIT MODEL NO.		PCG4A30														
CONDENSER ENTERING AIR TEMPERATURE	ID CFM	1200					1000					800				
	IDDB	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	IDWB	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55 / 45	T.C.	41.0	43.6	43.2	44.9	48.3	37.8	41.0	40.8	43.8	47.9	34.5	38.4	38.5	42.8	47.5
	S.C.	40.2	38.5	32.6	31.1	24.5	36.9	34.5	29.5	28.8	23.6	33.6	30.5	26.4	26.5	22.6
	K.W.	1.71	1.71	1.71	1.68	1.66	1.67	1.66	1.65	1.65	1.62	1.62	1.61	1.60	1.61	1.59
65 / 55	T.C.	37.4	40.0	38.8	41.6	45.6	34.4	37.6	36.9	40.5	44.1	31.4	35.2	35.1	39.4	42.6
	S.C.	37.0	36.3	30.5	29.8	23.4	34.0	32.5	27.6	27.3	25.2	31.0	28.7	24.6	24.8	27.0
	K.W.	1.88	1.89	1.89	1.88	1.86	1.83	1.83	1.83	1.83	1.82	1.78	1.77	1.78	1.78	1.78
75 / 63	T.C.	33.8	36.4	34.3	38.3	42.9	31.1	34.1	33.0	37.1	40.3	28.4	31.9	31.7	36.0	37.7
	S.C.	33.8	34.2	28.4	28.5	22.3	31.1	30.5	25.6	25.8	26.9	28.4	26.9	22.8	23.2	31.5
	K.W.	2.04	2.06	2.08	2.08	2.06	1.99	2.00	2.02	2.02	2.02	1.94	1.93	1.95	1.95	1.97
85 / 69	T.C.	30.1	32.3	29.8	34.2	38.6	27.8	30.3	28.8	33.2	36.6	25.5	28.2	27.7	32.1	34.5
	S.C.	30.1	31.2	26.1	26.7	20.6	27.8	28.1	23.4	24.0	21.9	25.5	25.0	20.8	21.3	23.3
	K.W.	2.22	2.23	2.24	2.27	2.27	2.15	2.16	2.14	2.19	2.22	2.09	2.08	2.03	2.12	2.16
95 / 75	T.C.	26.3	28.3	25.3	30.1	34.3	24.4	26.4	24.5	29.2	32.8	22.6	24.6	23.7	28.2	31.3
	S.C.	26.3	28.3	23.7	24.8	18.9	24.4	25.7	21.2	22.2	17.0	22.6	23.1	18.7	19.5	15.1
	K.W.	2.39	2.39	2.41	2.45	2.47	2.32	2.31	2.26	2.37	2.41	2.24	2.24	2.11	2.30	2.35
105 / 83	T.C.	21.4	24.8	20.6	25.9	28.7	20.3	22.8	20.0	24.7	27.8	19.2	20.8	19.4	23.4	26.9
	S.C.	21.4	24.8	19.5	22.4	16.9	20.3	22.3	17.8	20.0	15.2	19.2	19.9	16.1	17.5	13.6
	K.W.	2.57	2.57	2.56	2.61	2.67	2.49	2.49	2.44	2.50	2.61	2.41	2.40	2.32	2.38	2.55
115 / 89	T.C.	16.7	21.3	16.0	21.8	23.3	16.3	19.3	15.6	20.3	23.0	15.9	17.2	15.2	18.8	22.7
	S.C.	16.7	21.3	15.5	20.1	14.9	16.3	19.0	14.5	17.8	13.5	15.9	16.7	13.6	15.6	12.0
	K.W.	2.74	2.74	2.71	2.77	2.86	2.66	2.65	2.61	2.62	2.80	2.57	2.56	2.52	2.46	2.73
125 / 95	T.C.	12.0	17.9	11.4	17.7	17.8	12.3	15.7	11.2	15.9	18.2	12.6	13.6	11.0	14.1	18.5
	S.C.	12.0	17.9	11.4	17.7	13.0	12.3	15.7	11.2	15.7	11.7	12.6	13.6	11.0	13.7	10.5
	K.W.	2.91	2.91	2.86	2.92	3.06	2.83	2.82	2.79	2.73	2.99	2.74	2.72	2.72	2.55	2.92

COOLING PERFORMANCE DATA - 3 TON																
PACKAGED UNIT MODEL NO.		PCG4A36														
CONDENSER ENTERING AIR TEMPERATURE	ID CFM	1600					1400					1200				
	IDDB	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	IDWB	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55 / 45	T.C.	45.3	48.1	48.0	53.1	54.6	42.2	46.3	46.2	51.3	53.5	39.2	44.6	44.5	49.5	52.4
	S.C.	45.3	43.2	36.0	36.5	27.9	42.2	39.5	33.3	33.4	26.1	39.2	35.8	30.6	30.4	24.4
	K.W.	2.15	2.16	2.16	2.15	2.15	2.07	2.07	2.07	2.06	2.05	1.99	1.99	1.99	1.97	1.95
65 / 55	T.C.	42.0	43.7	43.8	48.6	52.4	39.4	42.5	42.4	47.1	51.0	36.8	41.2	41.0	45.6	49.5
	S.C.	42.0	40.3	34.1	34.5	26.6	39.4	36.9	31.3	31.5	24.9	36.8	33.5	28.6	28.5	23.1
	K.W.	2.39	2.41	2.40	2.41	2.40	2.30	2.31	2.31	2.32	2.31	2.20	2.22	2.22	2.22	2.21
75 / 63	T.C.	38.7	39.3	39.6	44.1	50.1	36.6	38.6	38.5	42.9	48.4	34.5	37.9	37.4	41.7	46.7
	S.C.	38.7	37.4	32.1	32.4	25.4	36.6	34.3	29.3	29.5	23.6	34.5	31.1	26.6	26.7	21.8
	K.W.	2.63	2.66	2.64	2.67	2.65	2.52	2.55	2.54	2.57	2.56	2.41	2.45	2.44	2.47	2.46
85 / 69	T.C.	35.3	35.4	35.5	39.4	45.0	33.6	34.8	34.8	38.7	43.8	31.9	34.2	34.0	38.0	42.7
	S.C.	35.3	34.4	30.0	30.1	23.6	33.6	32.0	27.5	27.5	21.9	31.9	29.5	25.0	25.0	20.2
	K.W.	2.87	2.90	2.88	2.93	2.93	2.75	2.79	2.77	2.83	2.83	2.64	2.68	2.67	2.72	2.73
95 / 75	T.C.	31.9	31.5	31.5	34.8	39.8	30.5	31.0	31.0	34.6	39.2	29.2	30.5	30.6	34.3	38.6
	S.C.	31.9	31.5	28.0	27.8	21.8	30.5	29.7	25.7	25.5	20.2	29.2	27.9	23.4	23.3	18.7
	K.W.	3.11	3.14	3.12	3.20	3.21	2.99	3.02	3.00	3.08	3.10	2.87	2.91	2.89	2.97	2.99
105 / 83	T.C.	26.5	26.8	26.3	29.0	33.7	26.0	26.5	26.2	29.1	33.5	25.5	26.3	26.0	29.2	33.4
	S.C.	26.5	26.8	24.0	24.4	19.3	26.0	25.7	22.6	22.8	18.0	25.5	24.5	21.2	21.3	16.7
	K.W.	3.43	3.39	3.35	3.43	3.48	3.27	3.27	3.23	3.32	3.37	3.11	3.14	3.11	3.20	3.25
115 / 89	T.C.	21.4	22.3	21.3	23.4	27.7	21.6	22.2	21.4	23.8	28.0	21.8	22.2	21.5	24.2	28.3
	S.C.	21.4	22.3	20.2	21.1	17.0	21.6	21.8	19.7	20.2	15.9	21.8	21.3	19.1	19.3	14.8
	K.W.	3.74	3.65	3.57	3.67	3.75	3.54	3.50	3.44	3.54	3.63	3.34	3.36	3.32	3.42	3.50
125 / 95	T.C.	16.2	17.7	16.3	17.7	21.7	17.2	17.9	16.7	18.5	22.5	18.2	18.0	17.0	19.2	23.2
	S.C.	16.2	17.7	16.3	17.7	14.6	17.2	17.9	16.7	17.6	13.8	18.2	18.0	17.0	17.4	13.0
	K.W.	4.05	3.90	3.79	3.90	4.01	3.81	3.74	3.66	3.77	3.88	3.57	3.58	3.53	3.65	3.76

COOLING PERFORMANCE DATA - 3.5 TON																
PACKAGED UNIT MODEL NO.		PCG4A42														
CONDENSER ENTERING AIR TEMPERATURE	ID CFM	1600					1400					1200				
	IDDB	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	IDWB	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55 / 45	T.C.	49.4	50.2	50.2	55.5	61.9	46.5	48.6	48.5	53.7	59.6	43.7	46.9	46.8	51.8	57.3
	S.C.	47.8	45.0	38.5	39.6	32.6	45.5	42.1	36.2	37.0	30.7	43.1	39.2	33.9	34.4	28.7
	K.W.	2.50	2.52	2.51	2.53	2.56	2.42	2.44	2.43	2.45	2.47	2.35	2.36	2.36	2.38	2.38
65 / 55	T.C.	46.6	47.0	47.0	52.1	58.0	44.4	45.6	45.6	50.5	56.1	42.2	44.1	44.1	48.9	54.1
	S.C.	45.5	43.2	36.4	37.7	30.8	43.7	40.5	34.4	35.3	29.2	41.9	37.7	32.5	32.8	27.5
	K.W.	2.73	2.76	2.74	2.77	2.80	2.55	2.68	2.66	2.70	2.71	2.36	2.61	2.59	2.62	2.61
75 / 63	T.C.	43.8	43.9	43.7	48.7	54.1	42.2	42.6	42.6	47.4	52.5	40.6	41.3	41.4	46.0	51.0
	S.C.	43.3	41.4	34.3	35.9	29.0	41.9	38.8	32.7	33.6	27.6	40.6	36.3	31.0	31.3	26.2
	K.W.	2.97	3.00	2.97	3.01	3.04	2.67	2.93	2.89	2.94	2.94	2.38	2.86	2.82	2.87	2.84
85 / 69	T.C.	40.7	41.8	40.1	44.9	50.0	39.3	40.0	39.3	43.8	48.8	38.0	38.2	38.4	42.7	47.6
	S.C.	40.4	37.7	32.8	33.9	27.3	39.2	36.1	31.0	31.2	25.9	38.0	34.5	29.3	28.5	24.5
	K.W.	3.28	3.30	3.28	3.31	3.36	2.98	3.24	3.20	3.24	3.26	2.69	3.17	3.13	3.18	3.15
95 / 75	T.C.	37.6	39.7	36.5	41.1	46.0	36.5	37.4	35.9	40.2	45.1	35.4	35.1	35.4	39.3	44.1
	S.C.	37.6	33.9	31.3	32.0	25.5	36.5	33.3	29.4	28.9	24.1	35.4	32.7	27.6	25.8	22.8
	K.W.	3.59	3.60	3.59	3.60	3.67	3.29	3.54	3.51	3.54	3.57	3.00	3.48	3.44	3.48	3.47
105 / 83	T.C.	33.3	34.8	31.8	36.1	40.6	32.5	33.0	31.5	35.5	40.0	31.7	31.2	31.2	34.9	39.4
	S.C.	33.3	31.0	28.4	29.5	23.3	32.5	30.3	26.9	27.0	22.1	31.7	29.6	25.4	24.5	20.9
	K.W.	4.01	4.03	4.01	4.03	4.09	3.72	3.97	3.94	3.97	3.99	3.44	3.90	3.86	3.90	3.90
115 / 89	T.C.	29.2	30.1	27.3	31.1	35.3	28.7	28.8	27.2	30.9	35.0	28.2	27.4	27.1	30.7	34.7
	S.C.	29.2	28.2	25.6	27.2	21.2	28.7	27.4	24.4	25.2	20.1	28.2	26.7	23.3	23.1	19.0
	K.W.	4.43	4.45	4.42	4.45	4.50	4.14	4.38	4.35	4.37	4.41	3.86	4.31	4.28	4.30	4.31
125 / 95	T.C.	25.1	25.4	22.8	26.2	30.1	24.9	24.5	22.9	26.4	30.1	24.7	23.7	23.0	26.5	30.1
	S.C.	25.1	25.4	22.8	24.8	19.1	24.9	24.5	22.0	23.3	18.1	24.7	23.7	21.2	21.8	17.2
	K.W.	4.84	4.86	4.83	4.87	4.91	4.57	4.79	4.76	4.78	4.82	4.29	4.71	4.69	4.70	4.73

COOLING PERFORMANCE DATA - 4 TON																
PACKAGED UNIT MODEL NO.		PCG4B48														
CONDENSER ENTERING AIR TEMPERATURE	ID CFM	1600					1400					1200				
	IDDB	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	IDWB	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
	IDWB	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55 / 45	T.C.	58.1	61.5	60.2	66.8	70.0	55.6	59.5	58.7	65.1	70.0	53.1	57.5	57.2	63.4	69.9
	S.C.	57.1	53.6	44.4	44.1	33.9	54.5	49.9	42.1	41.9	33.5	51.9	46.3	39.7	39.6	33.0
	K.W.	2.21	2.21	2.20	2.23	2.25	2.20	2.21	2.20	2.23	2.24	2.18	2.20	2.19	2.22	2.23
65 / 55	T.C.	54.4	56.8	55.7	62.2	66.3	52.1	55.1	54.4	60.9	65.7	49.8	53.4	53.1	59.5	65.1
	S.C.	54.0	51.5	42.4	42.4	32.4	51.6	48.0	40.1	40.2	31.5	49.2	44.5	37.9	38.0	30.6
	K.W.	2.46	2.47	2.46	2.49	2.50	2.44	2.46	2.45	2.49	2.49	2.43	2.46	2.45	2.48	2.49
75 / 63	T.C.	50.8	52.2	51.2	57.6	62.5	48.7	50.7	50.1	56.6	61.4	46.5	49.3	49.0	55.6	60.3
	S.C.	50.8	49.5	40.4	40.6	30.9	48.7	46.0	38.2	38.5	29.5	46.5	42.6	36.0	36.3	28.2
	K.W.	2.71	2.73	2.72	2.75	2.76	2.69	2.72	2.71	2.75	2.75	2.68	2.71	2.70	2.74	2.74
85 / 69	T.C.	46.5	47.2	46.2	52.4	57.6	44.6	46.0	45.1	51.5	56.8	42.8	44.9	44.1	50.6	56.0
	S.C.	46.5	45.8	37.7	38.1	28.7	44.6	42.9	35.5	35.9	27.5	42.8	40.0	33.3	33.8	26.3
	K.W.	3.05	3.06	3.05	3.08	3.09	3.04	3.05	3.04	3.08	3.09	3.02	3.05	3.03	3.07	3.08
95 / 75	T.C.	42.2	42.2	41.2	47.2	52.7	40.6	41.3	40.2	46.4	52.2	39.0	40.5	39.2	45.5	51.7
	S.C.	42.2	42.2	35.0	35.6	26.5	40.6	39.8	32.9	33.4	25.4	39.0	37.4	30.7	31.2	24.3
	K.W.	3.39	3.38	3.38	3.41	3.42	3.38	3.38	3.38	3.41	3.42	3.36	3.38	3.37	3.40	3.42
105 / 83	T.C.	37.2	37.0	35.3	40.9	46.8	36.1	36.2	35.0	40.6	46.5	34.9	35.4	34.8	40.3	46.2
	S.C.	37.2	37.0	31.2	33.3	24.7	36.1	35.2	30.1	31.3	23.7	34.9	33.4	28.9	29.4	22.7
	K.W.	3.85	3.85	3.85	3.88	3.89	3.85	3.85	3.85	3.88	3.89	3.84	3.86	3.84	3.87	3.88
115 / 89	T.C.	32.4	31.9	29.6	34.9	41.1	31.7	31.2	30.1	35.1	41.0	30.9	30.5	30.6	35.3	41.0
	S.C.	32.4	31.9	27.5	31.0	23.0	31.7	30.7	27.3	29.3	22.0	30.9	29.5	27.1	27.6	21.0
	K.W.	4.31	4.31	4.30	4.33	4.35	4.30	4.31	4.30	4.33	4.34	4.30	4.31	4.30	4.33	4.34
125 / 95	T.C.	27.6	26.9	23.9	28.8	35.5	27.3	26.2	25.1	29.6	35.6	27.0	25.5	26.4	30.3	35.7
	S.C.	27.6	26.9	23.9	28.8	21.2	27.3	26.2	24.6	27.4	20.3	27.0	25.5	25.4	25.9	19.4
	K.W.	4.76	4.76	4.76	4.79	4.80	4.76	4.77	4.76	4.79	4.80	4.76	4.77	4.76	4.79	4.79

COOLING PERFORMANCE DATA - 5 TON																
PACKAGED UNIT MODEL NO.		PCG4B60														
CONDENSER ENTERING AIR TEMPERATURE	ID CFM	1600					1400					1200				
	IDDB	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	IDWB	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
	IDWB	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55 / 45	T.C.	63.1	65.4	65.2	68.7	72.9	60.4	64.1	64.4	68.0	71.8	57.6	62.7	63.6	67.2	70.6
	S.C.	63.1	58.0	49.1	46.2	34.9	60.4	54.7	46.3	44.2	33.9	57.6	51.4	43.4	42.2	32.8
	K.W.	3.44	3.44	3.43	3.43	3.41	3.28	3.29	3.33	3.34	3.32	3.12	3.14	3.23	3.24	3.23
65 / 55	T.C.	59.1	61.9	28.9	32.9	36.7	56.7	60.5	28.4	32.2	36.0	54.3	59.1	27.9	31.6	35.4
	S.C.	59.1	57.3	23.1	23.1	17.6	56.7	53.5	21.5	21.6	16.8	54.3	49.7	20.0	20.0	16.0
	K.W.	3.74	3.75	3.74	3.76	3.76	3.57	3.59	3.61	3.63	3.64	3.41	3.43	3.48	3.50	3.52
75 / 63	T.C.	55.1	58.3	57.7	65.7	73.2	53.0	56.9	56.7	64.4	72.0	51.0	55.5	55.7	63.1	70.7
	S.C.	55.1	56.5	46.1	46.2	35.2	53.0	52.3	43.0	43.1	33.6	51.0	48.1	40.0	40.0	32.0
	K.W.	4.03	4.05	4.05	4.09	4.11	3.87	3.88	3.89	3.92	3.96	3.70	3.72	3.73	3.76	3.80
85 / 69	T.C.	27.6	53.5	52.8	60.0	60.4	26.5	52.5	52.2	59.2	63.2	25.5	51.5	51.6	58.4	65.9
	S.C.	27.6	52.6	43.8	44.0	41.4	26.5	49.3	40.9	41.1	35.7	25.5	46.0	38.0	38.1	30.1
	K.W.	4.42	4.44	4.45	4.48	4.47	4.26	4.28	4.29	4.31	4.33	4.11	4.12	4.13	4.15	4.19
95 / 75	T.C.	47.5	48.7	47.9	54.3	47.5	46.0	48.1	47.8	54.0	54.3	44.4	47.5	47.6	53.6	61.1
	S.C.	47.5	48.7	41.5	41.8	47.5	46.0	46.3	38.8	39.0	37.9	44.4	43.9	36.1	36.3	28.2
	K.W.	4.80	4.84	4.84	4.86	4.83	4.66	4.68	4.69	4.71	4.70	4.51	4.52	4.53	4.55	4.57
105 / 83	T.C.	43.0	44.0	39.9	46.0	44.7	41.5	42.6	40.0	46.1	49.5	40.0	41.1	40.1	46.2	54.3
	S.C.	43.0	44.0	35.7	37.8	39.3	41.5	41.4	34.1	35.6	32.5	40.0	38.7	32.5	33.3	25.7
	K.W.	5.37	5.40	5.41	5.42	5.41	5.23	5.25	5.26	5.26	5.27	5.10	5.09	5.11	5.11	5.13
115 / 89	T.C.	38.6	39.6	32.1	38.0	42.0	37.1	37.2	32.5	38.5	44.8	35.6	34.9	32.9	39.0	47.6
	S.C.	38.6	39.6	30.0	33.9	31.3	37.1	36.6	29.5	32.2	27.4	35.6	33.7	29.1	30.5	23.4
	K.W.	5.92	5.96	5.97	5.96	5.98	5.79	5.80	5.82	5.81	5.83	5.66	5.64	5.67	5.66	5.67
125 / 95	T.C.	34.2	35.1	24.4	30.0	39.3	32.7	31.9	25.0	31.0	40.1	31.2	28.7	25.6	31.9	41.0
	S.C.	34.2	35.1	24.4	30.0	23.4	32.7	31.9	25.0	28.8	22.2	31.2	28.7	25.6	27.6	21.0
	K.W.	6.47	6.51	6.53	6.49	6.55	6.35	6.35	6.38	6.35	6.38	6.23	6.19	6.24	6.21	6.21

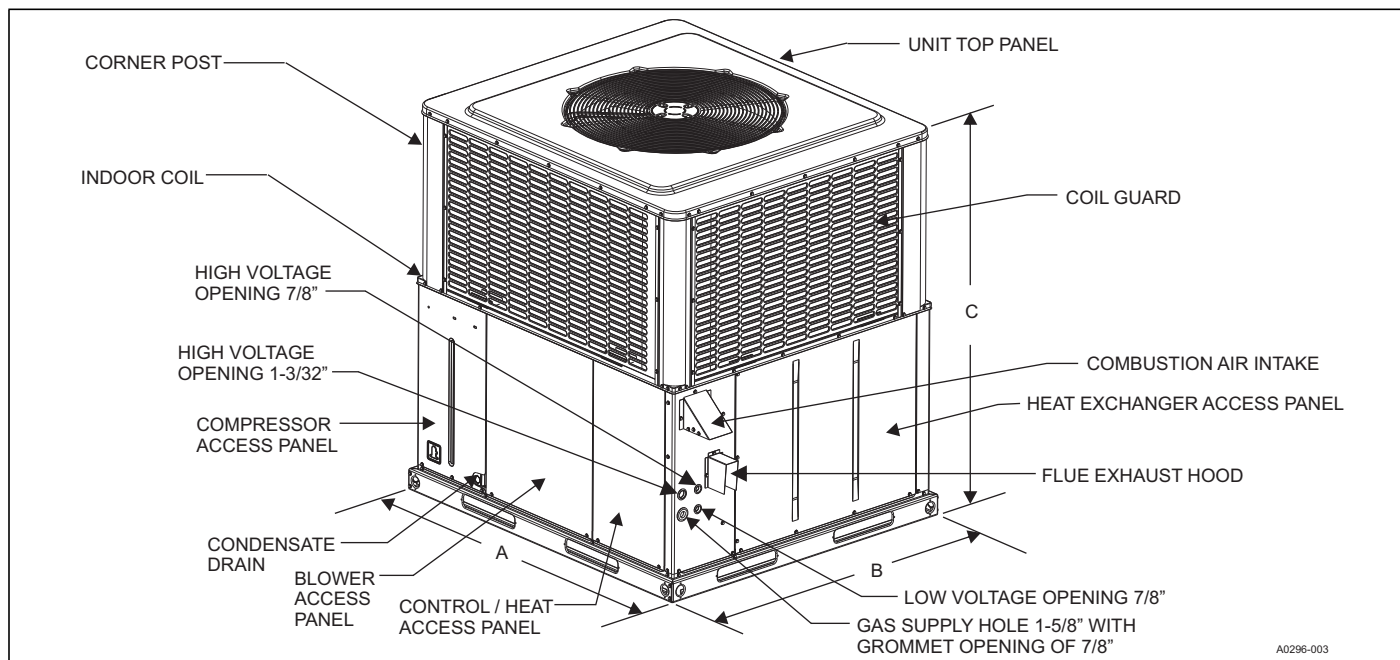

A0296-003

UNIT DIMENSIONS

Model	Dimensions - in inches		
	A	B	C
PCG4A24	51-1/4	35-3/4	47
PCG4A30	51-1/4	35-3/4	47
PCG4A36	51-1/4	35-3/4	47
PCG4A42	51-1/4	35-3/4	49
PCG4B48	51-1/4	45-3/4	53
PCG4B60	51-1/4	45-3/4	55

UNIT CLEARANCES^{1 2}

Direction	Distance (in.)	Direction	Distance (in.)
Top ³	36	Power Entry (Right Side)	36
Side Opposite Ducts	36	Left Side	24
Duct Panel	0	Bottom ⁴	1

1. A 1" clearance must be provided between any combustible material and the supply air duct work.
2. The products of combustion must not be allowed to accumulate within a confined space and recirculate.
3. Units must be installed outdoors. Over hanging structure or shrubs should not obstruct condenser air discharge outlet.
4. Units may be installed on combustible floors made from class A, B or C roof covering materials.

INDOOR BLOWER SPECIFICATIONS

Model	Motor				
	HP	RPM	EFF.	SF	Frame
24050	1/3	Variable	0.8	1.0	48
24075	1/2	Variable	0.8	1.0	48
30050	1/3	Variable	0.8	1.0	48
30075	1/2	Variable	0.8	1.0	48
36050	1/2	Variable	0.8	1.0	48
36075	1/2	Variable	0.8	1.0	48
36100	3/4	Variable	0.8	1.0	48
42075	3/4	Variable	0.8	1.0	48
42100	3/4	Variable	0.8	1.0	48
48065	3/4	Variable	0.8	1.0	48
48100	3/4	Variable	0.8	1.0	48
48125	3/4	Variable	0.8	1.0	48
60065	1	Variable	0.8	1.0	48
60100	1	Variable	0.8	1.0	48
60125	1	Variable	0.8	1.0	48

SOUND PERFORMANCE

Model (Tons)	Sound Rating ¹ dB (A)	Octave Band Centerline Frequency (Hz)						
		125	250	500	1000	2000	4000	8000
PCG4A24	75	62.4	61.5	64.2	67.0	61.0	57.3	49.6
PCG4A30	75	60.5	61.6	64.8	66.9	60.9	56.0	49.7
PCG4A36	74	58.5	61.8	65.4	66.5	60.7	54.8	49.8
PCG4A42	74	63.5	63.9	62.3	65.0	64.0	54.1	46.6
PCG4B48	74	63.5	63.9	62.3	65.0	64.0	54.1	46.6
PCG4B60	76	72.3	65.0	63.9	64.0	60.0	55.5	49.0

1. Rated in accordance with AHRI Standard 270.


ELECTRICAL DATA

Model	Voltage	Compressor			OD Fan Motor	Supply Blower Motor	MCA ¹ (Amps)	Max Fuse ² / Breaker ³ Size (Amps)
		RLA	LRA	MCC	FLA	FLA		
24050	208/230-1-60	8.7	45.0	14.4	1.3	2.6	14.8	20
24075	208/230-1-60	8.7	45.0	14.4	1.3	3.8	16.0	20
30050	208/230-1-60	9.8	57.0	15.1	1.3	2.6	16.2	25
30075	208/230-1-60	9.8	57.0	15.1	1.3	3.8	17.4	25
36050, 36075	208/230-1-60	13.0	78.0	23.0	1.3	3.8	21.4	30
36100	208/230-1-60	13.0	78.0	23.0	1.3	5.4	23.0	35
42075, 42100	208/230-1-60	17.9	112.0	28.0	1.3	5.4	29.1	45
48065, 48100, 48125	208/230-1-60	21.8	117.0	34.0	1.7	5.4	34.4	50
60065, 60100, 60125	208/230-1-60	24.4	144.2	38.0	1.7	7.0	39.2	60

1. Minimum Circuit Ampacity.

2. Maximum Over Current Protection per standard UL 1995.

3. Fuse or HACR circuit breaker size installed at factory or field installed.

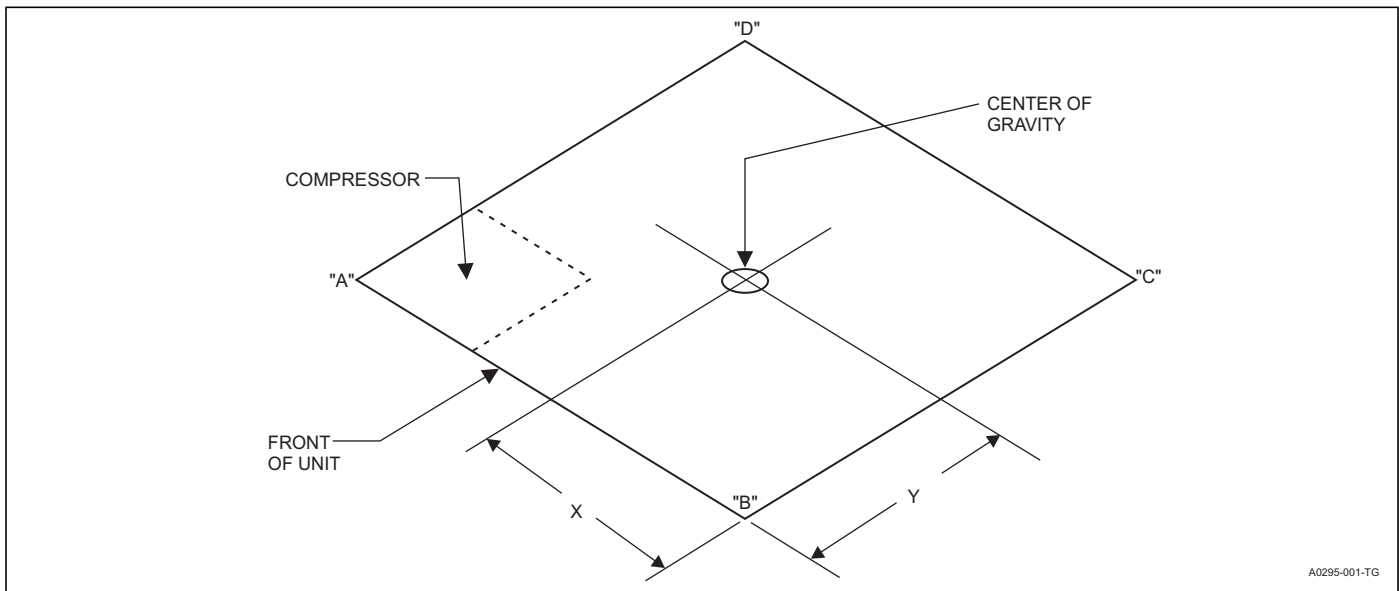

WEIGHTS & DIMENSIONS

Model	Weight (lbs.)		Center of Gravity		4 Point Load Location (lbs.)			
	Shipping	Operating	X	Y	A	B	C	D
24050	372	367	28	15	120	95	81	71
24075	382	377	28	15	124	96	81	76
30050	417	412	28	15	139	99	90	84
30075	421	416	28	15	146	93	82	95
36050	425	420	28	15	141	107	94	78
36075	432	427	28	15	135	115	103	74
36100	436	431	28	15	139	113	99	80
42075	446	441	28	15	145	112	99	85
42100	448	443	28	15	148	110	96	89
48065	520	515	28	15	189	116	93	117
48100	528	523	28	15	169	139	115	100
48125	533	528	28	15	164	145	124	95
60065	537	532	29	15	174	142	124	92
60100	541	536	28	15	177	140	117	102
60125	548	543	27	15	151	167	141	84

AIRFLOW PERFORMANCE - SIDE DUCT APPLICATION

Model	Motor Speed	External Static Pressure (Inches WC)								
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	1.0
		SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM
24050	Low (1)	732	667	624	567	517	470	415	369	277
	Low/Medium (2)	818	771	723	674	628	579	530	482	386
	Medium (3)	823	774	721	676	631	583	533	505	448
	Medium/High (4)	994	948	906	865	823	778	739	700	622
	High (5)	1148	1108	1071	1035	996	960	925	901	853
24075	Low (1)	887	847	802	750	705	664	613	563	463
	Low/Medium (2)	978	941	898	850	803	759	713	667	575
	Medium (3)	1171	1114	1074	1039	993	949	906	864	780
	Medium/High (4)	1349	1297	1265	1224	1185	1146	1107	1063	975
	High (5)	1487	1462	1392	1331	1318	1281	1241	1201	1121
30050	Low (1)	700	657	599	554	512	461	411	365	273
	Low/Medium (2)	906	868	825	779	735	692	650	608	524
	Medium (3)	992	951	911	868	826	787	747	712	642
	Medium/High (4)	1075	1032	1000	958	918	874	837	800	726
	High (5)	1136	1089	1053	1018	978	941	903	869	801
30075	Low (1)	1076	1020	984	943	903	859	819	779	699
	Low/Medium (2)	1102	1048	1010	974	934	890	850	810	730
	Medium (3)	1191	1140	1112	1076	1038	1000	958	919	841
	Medium/High (4)	1201	1225	1187	1151	1118	1080	1041	1002	924
	High (5)	1370	1329	1283	1271	1209	1176	1143	1109	1041
36050	Low (1)	1003	952	904	851	790	730	674	633	551
	Low/Medium (2)	1180	1133	1085	1042	995	942	889	834	724
	Medium (3)	1259	1209	1166	1126	1084	1032	980	928	824
	Medium/High (4)	1314	1271	1229	1186	1144	1097	1049	998	896
	High (5)	1506	1471	1403	1389	1345	1305	1262	1216	1124
36075	Low (1)	1225	1174	1131	1090	1046	993	941	888	782
	Low/Medium (2)	1259	1209	1166	1126	1084	1032	980	928	824
	Medium (3)	1314	1271	1229	1186	1144	1097	1049	998	896
	Medium/High (4)	1348	1306	1259	1222	1179	1133	1086	1036	936
	High (5)	1506	1471	1403	1389	1345	1305	1262	1216	1124
36100	Low (1)	1342	1302	1260	1217	1178	1134	1082	1034	938
	Low/Medium (2)	1425	1368	1332	1293	1251	1208	1163	1113	1013
	Medium (3)	1554	1503	1465	1423	1386	1346	1302	1257	1167
	Medium/High (4)	1658	1599	1588	1530	1495	1454	1414	1373	1291
	High (5)	1966	1914	1862	1810	1757	1705	1653	1600	1496
42075	Low (1)	1315	1266	1229	1194	1156	1117	1080	1036	948
	Low/Medium (2)	1436	1382	1342	1304	1262	1220	1179	1131	1035
	Medium (3)	1458	1406	1365	1327	1286	1244	1203	1155	1059
	Medium/High (4)	1573	1523	1484	1445	1408	1367	1327	1279	1183
	High (5)	1966	1914	1862	1810	1757	1705	1653	1600	1496
42100	Low (1)	1436	1382	1342	1304	1262	1220	1179	1131	1035
	Low/Medium (2)	1544	1492	1455	1416	1376	1336	1294	1248	1156
	Medium (3)	1573	1523	1484	1445	1408	1367	1327	1279	1183
	Medium/High (4)	1681	1640	1599	1557	1517	1478	1436	1393	1307
	High (5)	1935	1887	1834	1788	1743	1701	1651	1591	1471
48065	Low (1)	1046	1009	980	946	915	878	844	779	649
	Low/Medium (2)	1295	1250	1213	1172	1133	1087	1045	964	802
	Medium (3)	1620	1564	1517	1466	1418	1360	1308	1206	1002
	Medium/High (4)	1798	1722	1669	1620	1572	1527	1480	1413	1280
	High (5)	2146	2085	2025	1960	1872	1862	1798	1735	1609

Continued on next page.

AIRFLOW PERFORMANCE - SIDE DUCT APPLICATION (Continued)

Model	Motor Speed	External Static Pressure (Inches WC)								
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	1.0
		SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM
48100	Low (1)	1620	1564	1517	1466	1418	1360	1308	1206	1002
	Low/Medium (2)	1694	1630	1580	1530	1482	1430	1380	1292	1116
	Medium (3)	1798	1722	1669	1620	1572	1527	1480	1413	1280
	Medium/High (4)	1835	1758	1703	1653	1604	1558	1511	1442	1304
	High (5)	2146	2085	2025	1960	1872	1862	1798	1735	1609
48125	Low (1)	1620	1564	1517	1466	1418	1360	1308	1206	1002
	Low/Medium (2)	1798	1722	1669	1620	1572	1527	1480	1413	1280
	Medium (3)	1922	1863	1804	1754	1724	1658	1612	1559	1453
	Medium/High (4)	2001	1952	1890	1839	1820	1742	1696	1651	1561
	High (5)	2146	2085	2025	1960	1872	1862	1798	1735	1609
60065	Low (1)	1073	1043	1009	988	963	941	917	892	842
	Low/Medium (2)	1329	1292	1250	1223	1192	1165	1136	1105	1043
	Medium (3)	2054	1998	1934	1890	1843	1801	1757	1710	1616
	Medium/High (4)	2195	2144	2098	2049	2003	1955	1883	1868	1838
	High (5)	2445	2388	2306	2293	2235	2178	2129	2077	1973
60100	Low (1)	1730	1682	1628	1592	1552	1517	1479	1439	1359
	Low/Medium (2)	1858	1807	1749	1710	1667	1629	1589	1546	1460
	Medium (3)	2054	1998	1934	1890	1843	1801	1757	1710	1616
	Medium/High (4)	2195	2144	2098	2049	2003	1955	1883	1868	1838
	High (5)	2445	2388	2306	2293	2235	2178	2129	2077	1973
60125	Low (1)	2063	2008	1943	1899	1851	1809	1763	1717	1625
	Low/Medium (2)	2130	2084	2032	1983	1927	1951	1860	1815	1725
	Medium (3)	2195	2144	2098	2049	2003	1955	1883	1868	1838
	Medium/High (4)	2275	2252	2169	2154	2112	2065	1989	1976	1950
	High (5)	2445	2388	2306	2293	2235	2178	2129	2077	1973

AIRFLOW PERFORMANCE - BOTTOM DUCT APPLICATION

Model	Motor Speed	External Static Pressure (Inches WC)								
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	1.0
		SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM
24050	Low (1)	754	710	665	611	560	491	445	391	283
	Low/Medium (2)	867	815	773	720	677	622	559	505	397
	Medium (3)	951	908	868	828	781	735	686	631	521
	Medium/High (4)	1024	982	942	902	861	817	775	721	613
	High (5)	1204	1159	1121	1085	1051	1013	975	938	864
24075	Low (1)	899	869	827	782	734	685	630	575	465
	Low/Medium (2)	1033	960	924	879	834	787	735	685	585
	Medium (3)	1186	1133	1095	1056	1016	975	935	891	803
	Medium/High (4)	1357	1322	1284	1248	1211	1174	1127	1087	1007
	High (5)	1480	1439	1404	1367	1369	1299	1264	1226	1150
30050	Low (1)	726	676	622	575	520	467	410	376	308
	Low/Medium (2)	928	886	841	795	745	706	658	607	505
	Medium (3)	1021	983	942	900	855	811	770	729	647
	Medium/High (4)	1109	1071	1029	995	949	908	864	826	750
	High (5)	1170	1134	1096	1061	1020	978	938	899	821
30075	Low (1)	1076	1042	1009	969	930	890	849	808	726
	Low/Medium (2)	1104	1063	1025	987	947	908	869	830	752
	Medium (3)	1205	1170	1136	1098	1060	1025	985	943	859
	Medium/High (4)	1285	1251	1213	1179	1141	1104	1065	1027	951
	High (5)	1406	1375	1341	1306	1271	1236	1198	1163	1093
36050	Low (1)	1008	962	916	861	807	757	700	650	550
	Low/Medium (2)	1190	1148	1106	1055	1008	955	914	863	761
	Medium (3)	1262	1223	1181	1137	1091	1044	994	952	868
	Medium/High (4)	1324	1282	1245	1202	1161	1112	1067	1018	920
	High (5)	1517	1475	1447	1400	1357	1318	1275	1232	1146
36075	Low (1)	1231	1186	1146	1103	1069	1030	977	912	781
	Low/Medium (2)	1270	1225	1189	1140	1098	1046	1008	960	866
	Medium (3)	1317	1286	1245	1198	1151	1110	1064	1024	943
	Medium/High (4)	1358	1317	1275	1238	1197	1148	1105	1057	961
	High (5)	1517	1475	1447	1400	1357	1318	1275	1232	1146
36100	Low (1)	1340	1299	1264	1224	1182	1182	1097	1049	953
	Low/Medium (2)	1409	1368	1334	1291	1253	1201	1173	1128	1038
	Medium (3)	1527	1492	1470	1419	1385	1343	1299	1250	1152
	Medium/High (4)	1663	1585	1594	1601	1521	1480	1440	1400	1320
	High (5)	1930	1892	1853	1805	1760	1696	1625	1553	1409
42075	Low (1)	1332	1295	1263	1222	1185	1148	1110	1063	967
	Low/Medium (2)	1457	1419	1376	1340	1299	1253	1215	1160	1051
	Medium (3)	1451	1412	1371	1339	1296	1257	1211	1165	1072
	Medium/High (4)	1568	1524	1491	1464	1425	1383	1345	1296	1200
	High (5)	1978	1937	1891	1837	1785	1725	1656	1604	1502
42100	Low (1)	1455	1414	1379	1335	1294	1254	1212	1160	1056
	Low/Medium (2)	1566	1532	1492	1455	1416	1372	1333	1280	1174
	Medium (3)	1565	1530	1491	1458	1419	1381	1336	1290	1198
	Medium/High (4)	1675	1641	1606	1578	1535	1495	1455	1412	1326
	High (5)	1946	1909	1863	1815	1771	1721	1654	1595	1477
48065	Low (1)	1032	999	970	938	910	879	843	808	737
	Low/Medium (2)	1272	1236	1204	1165	1129	1081	1037	968	829
	Medium (3)	1611	1574	1518	1494	1439	1405	1357	1266	1083
	Medium/High (4)	1892	1777	1771	1701	1639	1617	1565	1489	1336
	High (5)	2131	2058	1998	1949	1892	1840	1788	1728	1608

Continued on next page.

AIRFLOW PERFORMANCE - BOTTOM DUCT APPLICATION (Continued)



Model	Motor Speed	External Static Pressure (Inches WC)								
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	1.0
		SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM	SCFM
48100	Low (1)	1598	1548	1502	1454	1410	1362	1307	1251	1139
	Low/Medium (2)	1663	1612	1568	1522	1476	1422	1370	1297	1152
	Medium (3)	1789	1733	1670	1650	1596	1578	1535	1483	1379
	Medium/High (4)	1931	1814	1808	1736	1673	1650	1597	1519	1362
	High (5)	2131	2058	1998	1949	1892	1840	1788	1728	1608
48125	Low (1)	1598	1548	1502	1454	1410	1362	1307	1251	1139
	Low/Medium (2)	1766	1703	1656	1611	1566	1518	1469	1419	1319
	Medium (3)	1912	1875	1805	1787	1750	1713	1672	1636	1564
	Medium/High (4)	2105	2014	2006	1931	1898	1845	1793	1739	1631
	High (5)	2131	2058	1998	1949	1892	1840	1788	1728	1608
60065	Low (1)	1026	999	989	950	907	907	886	862	816
	Low/Medium (2)	1263	1230	1192	1165	1167	1101	1099	1071	1015
	Medium (3)	1987	1933	1861	1817	1820	1715	1725	1651	1504
	Medium/High (4)	2114	2050	2047	1974	1899	1889	1920	1866	1758
	High (5)	2369	2308	2249	2183	2126	2088	2034	1990	1902
60100	Low (1)	1655	1612	1596	1531	1461	1462	1429	1391	1316
	Low/Medium (2)	1766	1720	1667	1629	1632	1539	1537	1498	1421
	Medium (3)	1987	1933	1861	1817	1820	1715	1725	1651	1504
	Medium/High (4)	2114	2050	2047	1974	1899	1889	1920	1866	1758
	High (5)	2369	2308	2249	2183	2126	2088	2034	1990	1902
60125	Low (1)	1973	1924	1905	1826	1743	1744	1703	1660	1574
	Low/Medium (2)	2024	1983	1937	1889	1886	1843	1799	1759	1679
	Medium (3)	2123	2075	2019	1970	1978	1862	1849	1804	1714
	Medium/High (4)	2191	2154	2117	2075	2002	1995	2028	1974	1866
	High (5)	2369	2308	2249	2183	2126	2088	2034	1990	1902

1. Airflow tested with dry coil conditions, without air filters, at 230 volts
2. Applications above 0.8" w.c. external static pressure are not recommended.
3. Brushless DC high efficiency standard ECM blower motor used for all indoor blower assemblies.
4. Minimal variations in airflow performance data results from operating at 208 volts. Data above may be used in those cases.
5. Heating applications tested at 0.50" w.c. esp, and cooling applications tested at 0.30" w.c. esp per standards.


ADDITIONAL STATIC RESISTANCE

Size (Tons)	CFM	Wet Indoor Coil	Economizer ¹	Filter/Frame Kit
024 (2.0)	500	0.01	0.00	0.01
	600	0.01	0.00	0.02
	700	0.01	0.00	0.04
	800	0.02	0.01	0.06
	900	0.03	0.01	0.08
	1000	0.04	0.01	0.10
	1100	0.05	0.01	0.13
	1200	0.06	0.02	0.16
030 (2.5)	700	0.01	0.00	0.04
	800	0.02	0.01	0.06
	900	0.03	0.01	0.08
	1000	0.04	0.01	0.10
	1100	0.05	0.01	0.13
	1200	0.06	0.02	0.16
036 (3.0)	1300	0.07	0.03	0.17
	700	0.01	0.00	0.04
	800	0.02	0.01	0.06
	900	0.03	0.01	0.08
	1000	0.04	0.01	0.10
	1100	0.05	0.01	0.13
	1200	0.06	0.02	0.16
042 (3.5)	1300	0.07	0.03	0.17
	1400	0.08	0.04	0.18
	1100	0.02	0.02	0.04
	1200	0.03	0.02	0.04
	1300	0.04	0.02	0.05
	1400	0.05	0.03	0.05
	1500	0.06	0.04	0.06
	1600	0.07	0.04	0.07
	1700	0.07	0.04	0.08
	1800	0.08	0.04	0.09
048 (4.0)	1900	0.09	0.05	0.10
	2000	0.09	0.05	0.11
	1100	0.02	0.02	0.04
	1200	0.03	0.02	0.04
	1300	0.04	0.02	0.05
	1400	0.05	0.03	0.05
	1500	0.06	0.04	0.06
	1600	0.07	0.04	0.07
	1700	0.07	0.04	0.08
	1800	0.08	0.04	0.09
060 (5.0)	1900	0.09	0.05	0.10
	2000	0.09	0.05	0.11
	1100	0.02	0.02	0.04
	1200	0.03	0.02	0.04
	1300	0.04	0.02	0.05
	1400	0.05	0.03	0.05
	1500	0.06	0.04	0.06
	1600	0.07	0.04	0.07
	1700	0.07	0.04	0.08
	1800	0.08	0.04	0.09


1. The pressure drop through the economizer is greater for 100% outdoor air than for 100% return air. If the resistance of the return air duct is less than 0.25 IWG, the unit will deliver less CFM during full economizer operation.
2. Filter pressure drop based on standard filter media tested at velocities not to exceed 300 ft/min.

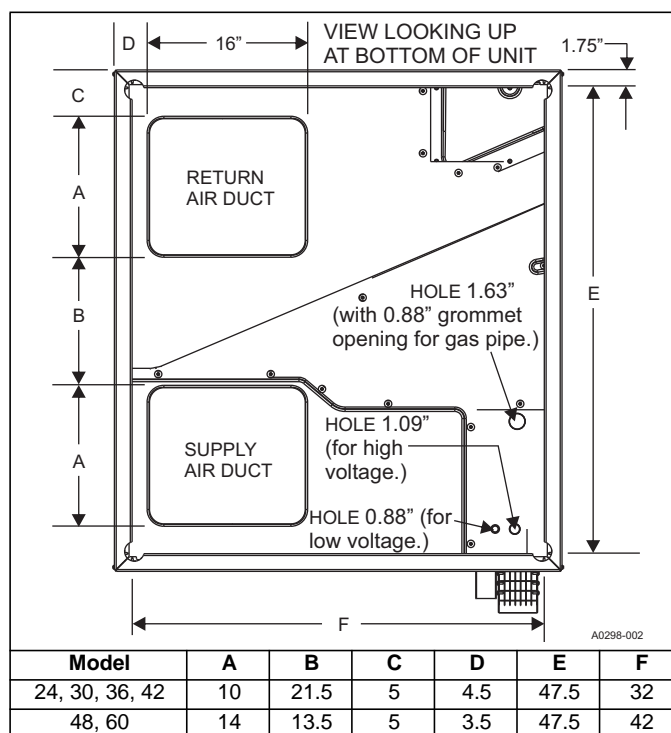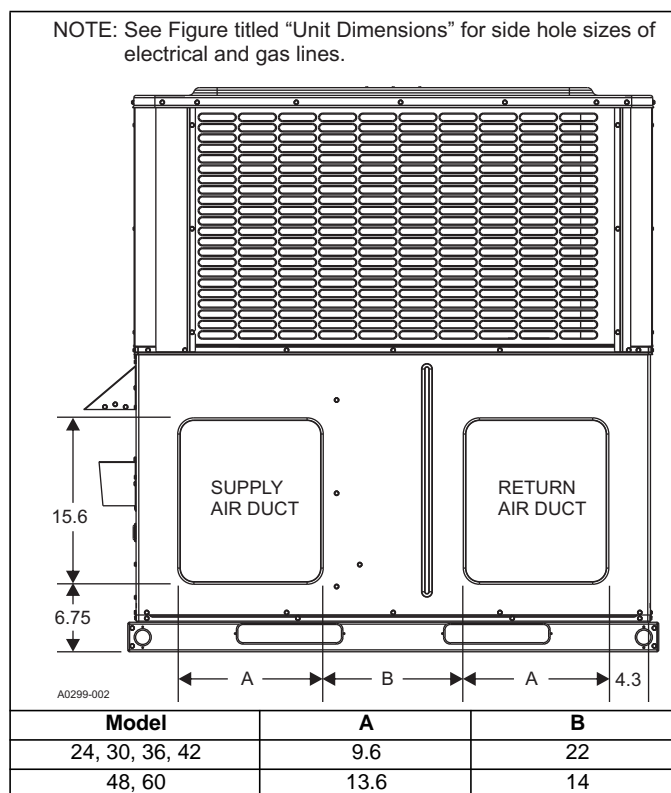BOTTOM DUCT DIMENSIONS (Inches)**REAR DUCT DIMENSIONS (Inches)**

UNIT TYPICAL DUCT APPLICATIONS

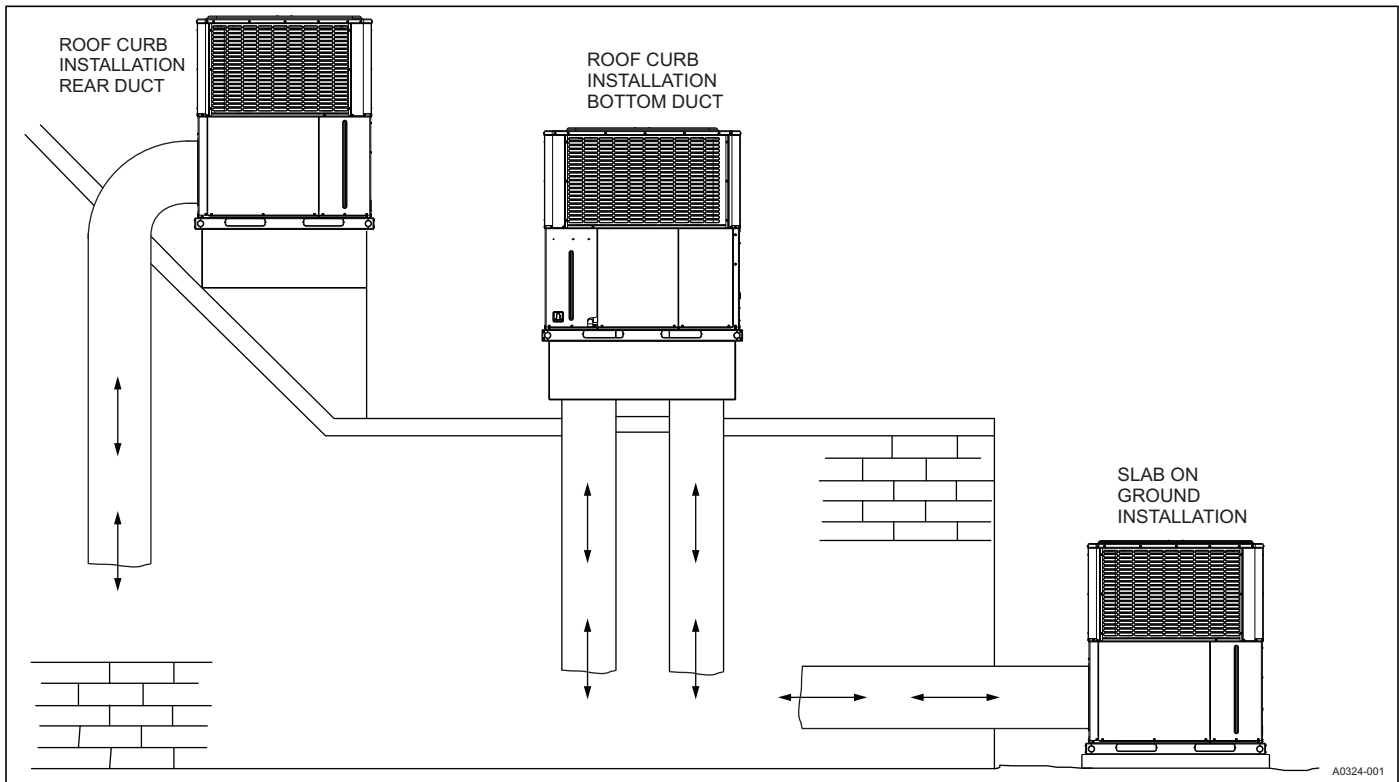

UNIT TYPICAL SLAB ON GROUND INSTALLATION

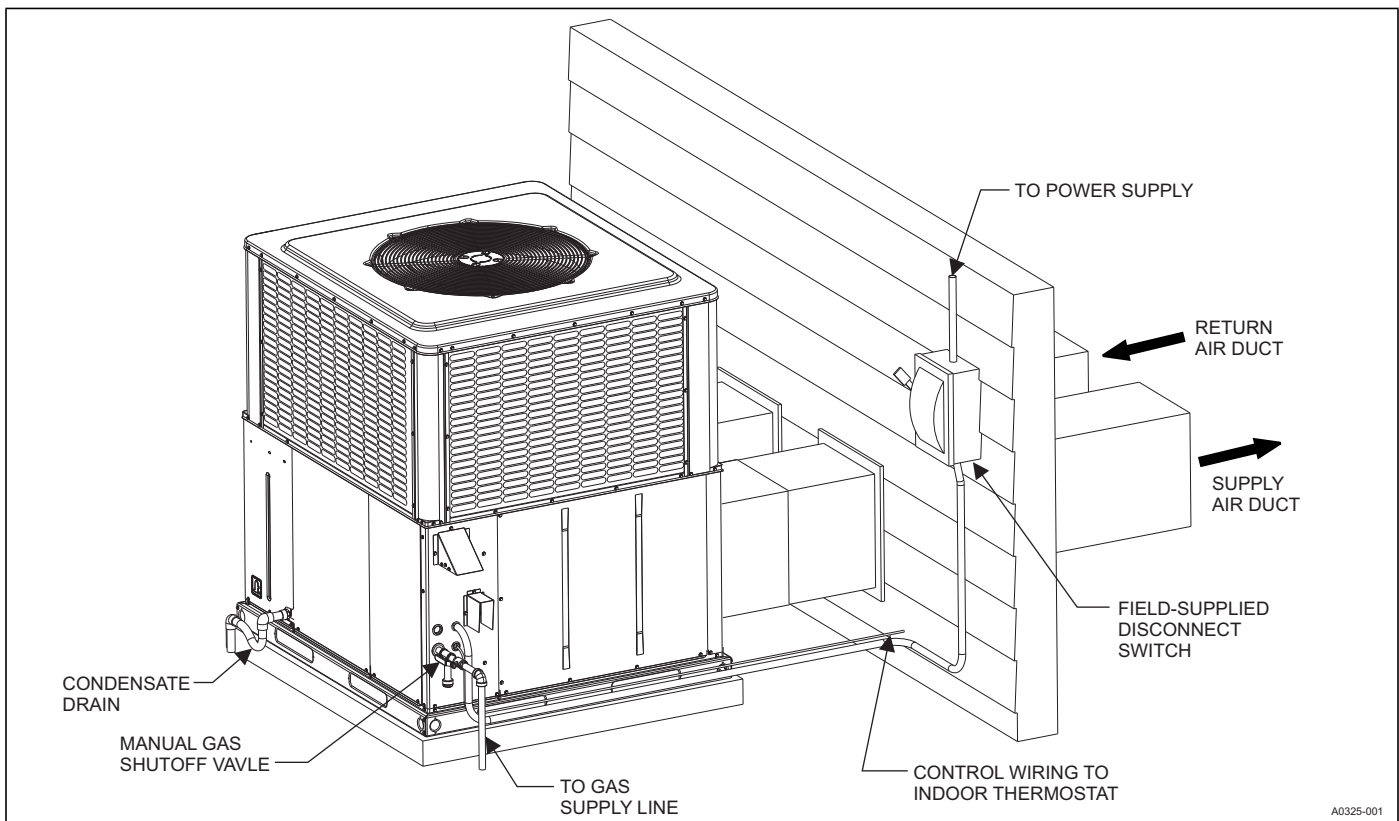

UNIT TYPICAL ROOF CURB INSTALLATION