

## SUBMITTAL - 09KNAS1

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_

Location: \_\_\_\_\_

**R32**

Indoor Unit: **ASLH09KNAS**

Outdoor Unit: **AOLH09KNAS1**



### FEATURES

#### INDOOR UNIT:

- 115V System for applications with limited electrical service
- Compact wall-mounted indoor unit providing superior comfort and a premium aesthetic
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 20dB
- Multiple fan speed options; Auto, High, Med, Low, and Quiet.
- Special Operation modes available:
  - Economy Mode
  - Energy Saving Mode
  - Powerful Mode
  - Minimum Heat Mode (accessible via WLAN only)
  - Auto-restart function
  - Auto Changeover
- Enhanced controls platform for seamless, intuitive operation:
  - Wireless remote controller included with the indoor unit
  - Wi-Fi connectivity with Airstage Mobile App monitoring and control via compatible USB WLAN adapter
  - Extended connectivity with support for third-party interface options

#### OUTDOOR UNIT:

- Low GWP R-32 systems for reduced environmental impact
- INVERTER-driven compressor delivering high efficiency and comfort.
- Compact outdoor unit with extended line set lengths up to 66ft (20m)



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Version: 20250106A

- 1 of 6 -

## SUBMITTAL - 09KNAS1

### SPECIFICATIONS:

Indoor Unit				ASLH09KNAS	
Outdoor Unit				AOLH09KNAS1	
System Name				09KNAS1	
AHRI Number				215422283	
SEER2	Cooling			Btu/hW	17
EER2				kW/kW	3.09
HSPF2				Btu/hW	10.55
COP2	Heating			kW/kW	9
				Btu/hW	3.56
					12.16
Outdoor Operation Range		Cooling		°F (°C)	50 to 126 (10 to 52)
		Heating			5 to 75 (-15 to 24)
Indoor Capacity		Cooling		Rated	9000
				Min.—Max.	3,100—10,500
		Heating		Rated	9000
				Min.—Max.	3,100—12,400
				Rated	5200
				Max.	8550
				Rated	
				Max.	6800
Outdoor Connection pipe	Size	Liquid		in (mm)	Ø1/4 (Ø6.35)
		Gas			Ø3/8 (Ø9.52)
	Method				FLARE
	Pre-charge length			ft (m)	49 (15)
	Min. length				10 (3)
	Max. length				66 (20)
	Max. height difference				49 (15)
Indoor Dimensions (H × W × D)		Net		in (mm)	9-13/16 × 30-5/16 × 8-9/16 (250 × 770 × 218)
		Gross			10-13/16 × 33-1/16 × 12-3/16 (274 × 840 × 310)
Indoor Weight		Net		lb (kg)	15 (7.0)
		Gross			20 (9.0)
Outdoor Dimensions (H × W × D)		Net		in (mm)	21-5/16 × 26-1/8 × 11-7/16 (541 × 663 × 290)
		Gross			23-11/16 × 31-5/8 × 14-3/4 (602 × 804 × 375)
Outdoor Weight		Net		lb (kg)	51 (23)
		Gross			57 (26)
Indoor Fan	Airflow rate	Cooling		High	365 (620)
				Med	288 (490)
				Low	212 (360)
				Quiet	141 (240)
		Heating		High	365 (620)
				Med	300 (510)
				Low	241 (410)
				Quiet	153 (260)
	Type × Qty				CROSSFLOW FAN × 1
	Motor output			W	27
Outdoor Fan	Airflow rate	Cooling		CFM (m³/h)	971 (1,650)
		Heating			853 (1,450)
	Type × Qty				PROPELLER FAN × 1
	Motor output			W	23
Indoor Sound Pressure Level*4		Cooling		High	41
				Med	35
				Low	27
				Quiet	20
		Heating		High	41
				Med	35
				Low	30
				Quiet	22
Outdoor Sound Pressure Level*4		Cooling		45	
		Heating		46	

## SUBMITTAL - 09KNAS1

### SPECIFICATIONS:

Outdoor Refrigerant		Type		R32	
		Charge	lb oz	1 lb 3 oz	
Additional Charge Calculation			g	530	
			oz/ft	0.22	
			g/m	20	
Outdoor Refrigerant Oil		Type		RB74AF	
		Amount	in <sup>3</sup> (cm <sup>3</sup> )	14.6 (240)	
Indoor Moisture removal			pints/h (L/h)	1.9 (0.88)	
Indoor Drain hose		Material		POLYPROPYLENE + HIGH-DENSITY POLYETHYLENE	
		Tip Diameter		I.D.: Ø17/32 (Ø13.8) O.D.: Ø19/32 to 21/32 (Ø15 to 16.8)	
Indoor Operation range		Cooling	*F (°C)	64 to 90 (18 to 32)	
			%RH	80 or less	
		Heating	*F (°C)	60 to 86 (16 to 30)	
Power Supply				115 V~ 60 Hz	
Available Voltage Range				103.5—126.5	
System power supply		Voltage		V	115
		Frequency		Hz	60
		Available voltage range		V	103.5—126.5
Indoor Current	Cooling		Rated	A	8.2
	Heating				7.5
Maximum Operating Current <sup>*3</sup>			Cooling		14.7
			Heating		
Outdoor Starting Current					8.2
MCA <sup>*5</sup>					18.3
Wiring spec. <sup>*6</sup>		MAX. CKT. BKR <sup>*7</sup>			20
Indoor Input Power	Cooling	Rated	kW		0.85
				Min.—Max.	0.24—1.44
		47°FDB (Outdoor temp.)		Rated	0.74
				Min.—Max.	0.20—1.38
	Heating	17°FDB (Outdoor temp.) <sup>*1</sup>		Rated	0.58
				Max.	1.08
		5°FDB (Outdoor temp.) <sup>*2</sup>		Rated	0.94
				Max.	
Indoor Power Factor	Cooling		%	90	
	Heating			86	

#### NOTES

- Cooling: Indoor temperature of 80°F (26.67°CDB)/67°FWB (19.44°CWB), and outdoor temperature of 95°FDB (35°CDB)/75°FWB (23.9°CWB).
- Heating: Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 47°FDB (8.33°CDB)/43°FWB (6.11°CWB).
- \*1: Heating (17°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 17°FDB (–8.33°CDB)/15°FWB (–9.44°CWB).
- \*2: Heating (5°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 5°FDB (–15.0°CDB)/4°FWB (–15.56°CWB).
- Test conditions are based on AHRI 210/240 2023.
- \*4: Indoor Sound Pressure Level.
- Measured values in manufacturer's anechoic chamber.
- Outdoor Sound Pressure Level
- Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.
- \*3: Maximum Operating Current
- Maximum current is maximum value when operated within the operation range.
- The total current of indoor unit and outdoor unit.
- MCA —\*5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)
- Wiring spec. —\*6: Selected sample based on Japan Electrotechnical Standards and Codes Committee ED005.
- As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.
- MAX. CKT. BKR —\*7: Maximum Circuit Breaker

System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.


SUBMITTAL - 09KNAS1

ACCESSORIES:

Model Number	Description
UTY-TFSXH4	Wi-Fi Adapter (WiFi Interface Module USB Type)
FJ-IR-WIFI-1NA	Intesis IR Wireless AC Cloud Control Interface (Intesis Home app)
BM101WA	Cielo - Breez Max IR Controller w/ WiFi (Black)
BM102WA	Cielo - Breez Max IR Controller w/ WiFi (White)

## SUBMITTAL - 09KNAS1



### INDOOR UNIT DIMENSIONS:

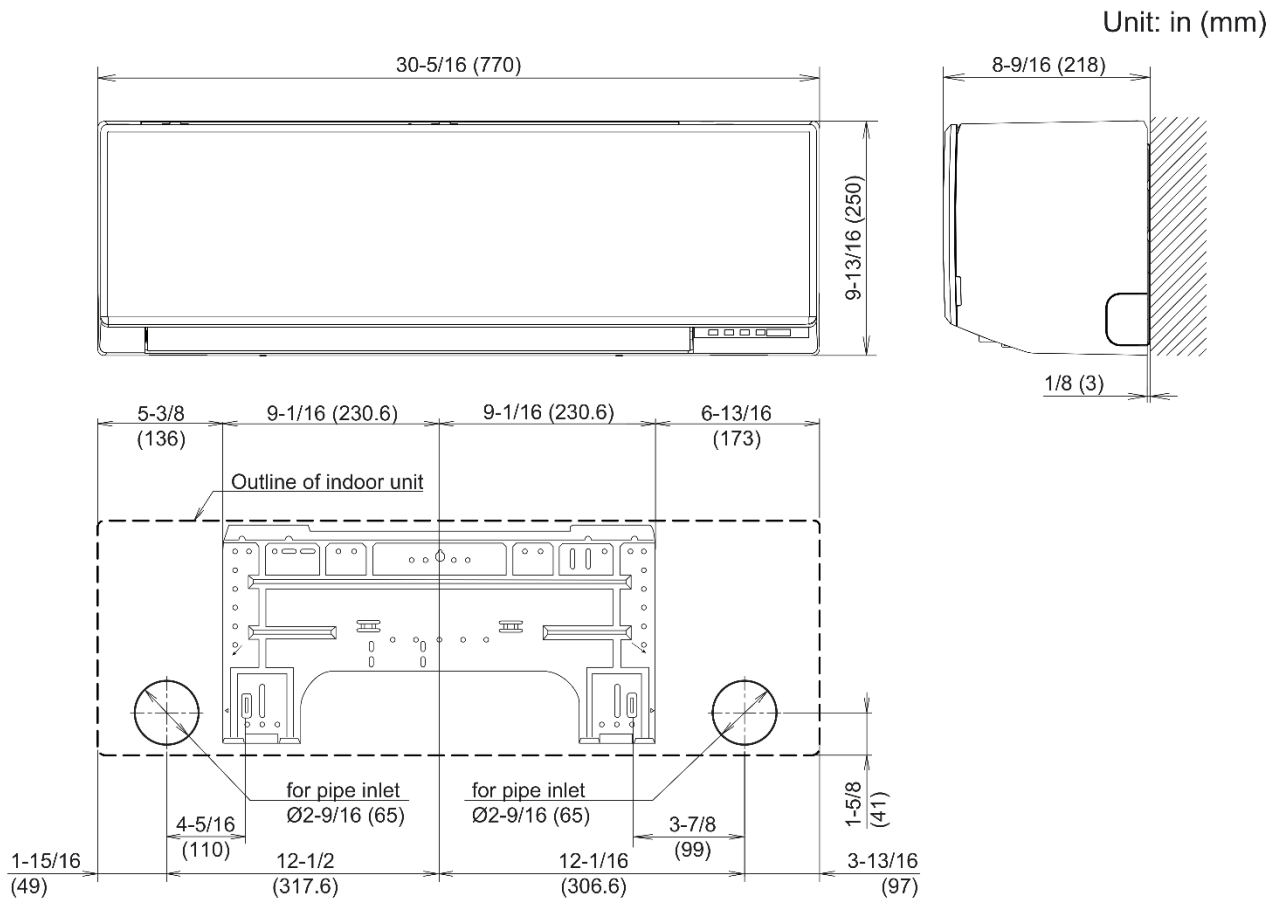





# SUBMITTAL - 09KNAS1

## OUTDOOR UNIT DIMENSIONS:

Unit: in (mm)

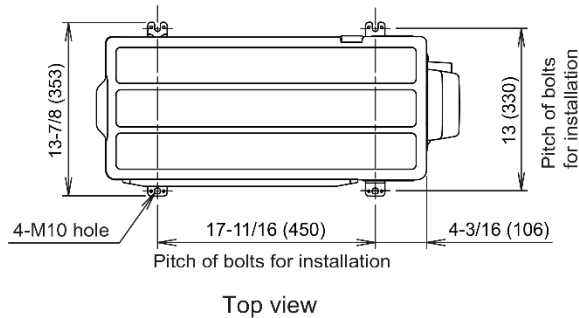

Side view

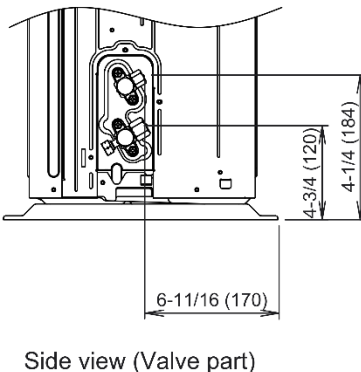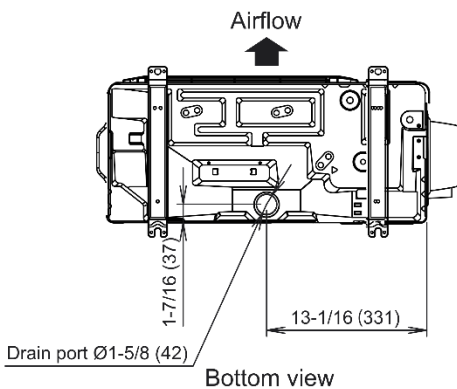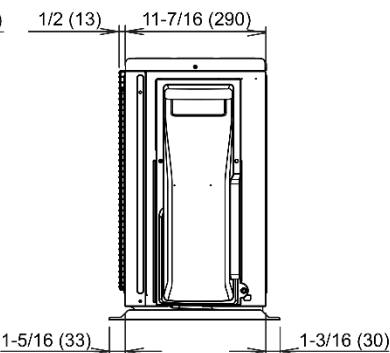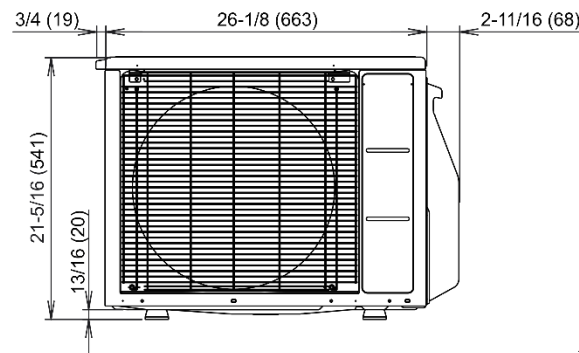

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2024 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.