

Submittal Data: UTY LNHU

Wireless Remote Control

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_

Location: \_\_\_\_\_

Approval: \_\_\_\_\_

Engineer: \_\_\_\_\_

Construction: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Unit #: \_\_\_\_\_

Submitted by: \_\_\_\_\_

Drawing #: \_\_\_\_\_

Reference: \_\_\_\_\_

## General Features

- Group control (up to 16 indoor units)
- Program timer
- Sleep timer
- Economy operation
- Filer reset
- Defrost display
- Automatic clock adjustment
- System addressing
- Can be used with wired remotes
- Wide and precise transmitting range



**Electrical** ..... 3 v DC  
Power consumption..... Max .3 W

## Temperature Setting Range



Cooling..... 64°F - 88°F (18°C - 30°C)  
Heating..... 60°F - 88°F (10°C - 30°C)  
Cooling/Dry..... 64°F - 88°F (18°C - 30°C)

## Dimensions

H x W x D

Uncrated in. (mm)..... 6-11/16" x 2-7/32" x 3/4" (170x56x19)

Weight..... 3 oz.

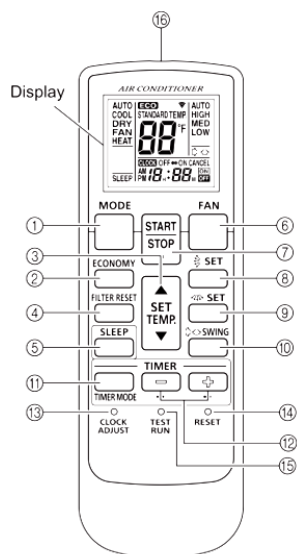

- |                              |                             |
|------------------------------|-----------------------------|
| 1) Mode button               | 16) Signal transmitter      |
| 2) Economy button            | 17) Temperature Set display |
| 3) Set Temp. Up/Down buttons | 18) Economy display         |
| 4) Filter Reset button       | 19) Operating Mode display  |
| 5) Sleep button              | 20) Sleep display           |
| 6) Fan button                | 21) Transmit indicator      |
| 7) Start/Stop button         | 22) Fan Speed display       |
| 8) Set button (vertical)     | 23) Swing display           |
| 9) Set button (horizontal)   | 24) Timer Mode display      |
| 10) Swing button             | 25) Clock display           |
| 11) Timer Mode button        |                             |
| 12) Timer plus/minus buttons |                             |
| 13) Clock adjustment         |                             |
| 14) Reset button             |                             |
| 15) Test-Run button          |                             |