



R-32 Standard Efficiency Air Conditioner Direct-Drive Packaged Rooftop Unit 15-25 Ton DSC Light Commercial

15 - 20 Ton 11 EER / 14.2 IEER

25 Ton 10 EER / 13.2 IEER



R32

* Complete warranty details available from your local distributor or manufacturer's representative
or at www.daikincomfort.com or www.daikinac.com

A woman with blonde hair tied in a bun, wearing a light-colored business suit, is looking down at a clipboard she is holding. She is standing on a staircase with a metal railing. The background is blurred, showing the steps of the staircase.

Our Perfect Package:

Harnessing energy-efficient performance, proven technology, and enhanced comfort for life.

Since becoming the first company in Japan to manufacture packaged air conditioning systems, in 1951, Daikin has supported comfortable indoor living based on the strengths and technologies that have led to the growth of the company becoming one of the world's largest manufacturers of HVAC products, systems and refrigerants.

Today, as a comprehensive global manufacturer of HVAC products and systems, the Daikin brand is committed to being recognized as a truly global and excellent company capable of continually creating new value for its customers. The company plans to pursue sustainable growth and foster business operations that consistently harmonize with the goals of improving indoor comfort.


The group philosophy of the company includes:

- » Creating new value continuously for customers
- » Developing world leading energy-saving technology
- » Being a flexible and dynamic organization
- » Allowing employees to be the driving force for the success of the company
- » Fostering an atmosphere of best practices, boldness, and innovation
- » Thinking and acting globally



Contents

2	Introduction	2
4	Nomenclature	4
5	Features and Benefits	5
	Applications	8
	Serviceability	8
9	Product Specifications	9
	Coil Dimensions	12
	AHRI Ratings	12
	Sound Data	12
13	Dimensional Data	13
14	Expanded Cooling Data	14
20	Air Flow Data	20
39	Electrical Data	39
48	Electric Heat	48
49	Wiring Diagrams	49
59	Unit Clearances	59
60	Installation	60
	Weights	60

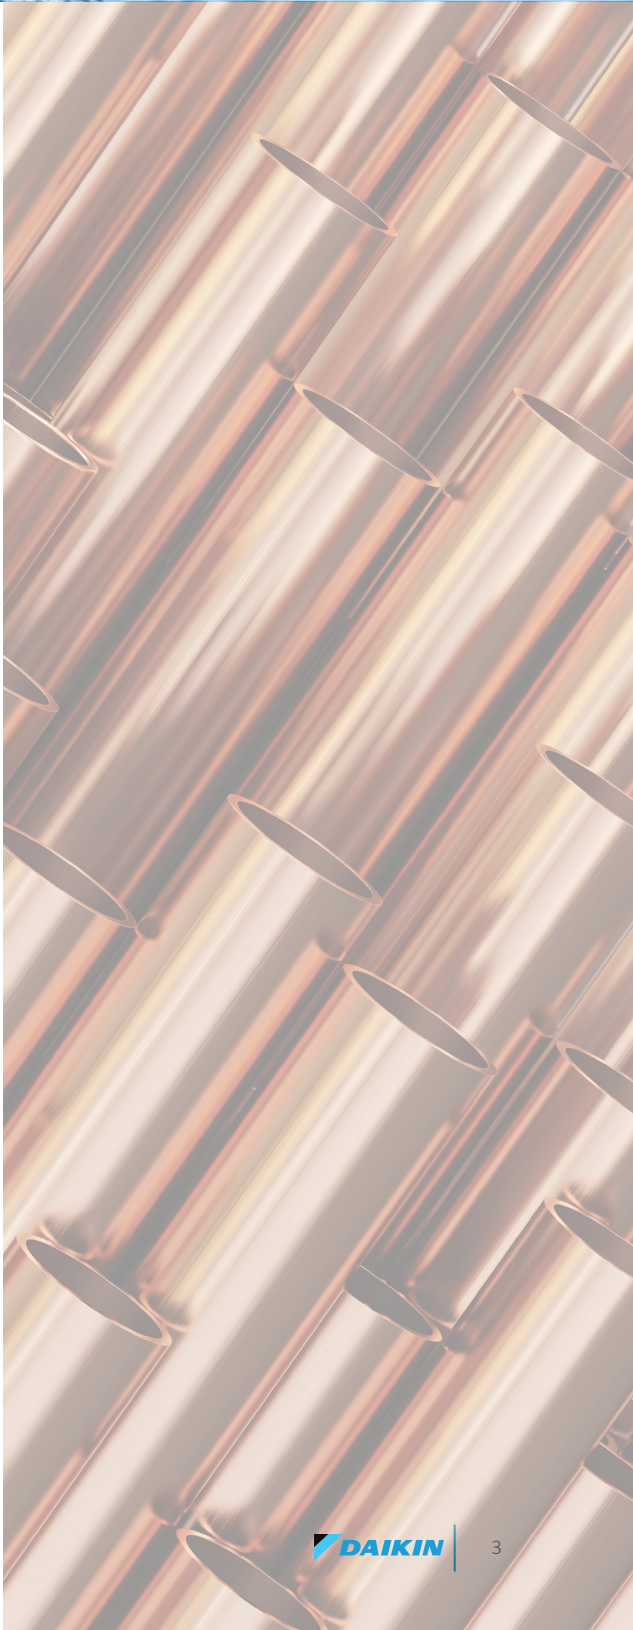

Nomenclature

[illegible]

Daikin Packaged Rooftop Units (RTUs) are built to perform, with features and options that help provide low installation and operation costs, superior indoor air quality, efficient operation, and longevity.

Installation

Daikin Packaged units are designed with fast and easy installation in mind and are ideal for both new construction and retrofit projects.

Cabinet Construction

Daikin packaged rooftop units are made with high quality galvanized steel with a powder-paint finish to provide higher corrosion resistance.

- » Unit fully insulated to prevent sweating and thermal losses, using our foil face fiberglass insulation which also omits exposed filter fibers into the airstream.
- » The full perimeter base rail is built using heavy gauge galvanized steel for a stronger structural installation. The base rails are a minimum of 3 ½" tall and include holes to allow for overhead rigging and lifting with forklifts.
- » Electrical lines can be brought through the base of the unit or through the horizontal knockout for easy installation and accessibility on the field

Compressor

High performance, low noise scroll compressors with stage control to match the required total load for efficient part load control.

- » Resiliently factory-mounted on rubber grommets for vibration isolation.
- » Refrigeration circuits includes both high and low pressure safety switches.
- » Unit is factory charged with environmental friendly and sustainable low GWP R-32 refrigerant.
- » Two single-stage scroll compressors individually circuited for partial load applications.
- » Compressor location outside the condenser section to avoid air bypass.
- » Crankcase heaters and external thermal overload protection are also provided for compressor durability.

Supply Fan

Supply fan will be 2 direct-drive motors. Ball bearing Direct-Drive EEM motor removes the need for belts, sheaves, bearings and lubrication.

- » Slide out forward curb fans for easy maintenance and replacement.
- » High-static drive options for applications with high airflow/static requirements.
- » Each fan assembly is dynamically trim balanced at the factory before shipment for quick start-up and efficient operation.
- » Motor with thermal overload is provided for long lasting operation.

Coils

The indoor coil section is installed in a draw through configuration to provide better dehumidification. These coils are constructed with seamless copper tubes, mechanically bonded into aluminum plate-type fins with full drawn collars to completely cover the tubes for high operating efficiencies.

- » Coils are factory pressure tested to ensure pressure and leak integrity.
- » Coils include a Thermal Expansion Valve per circuit, high- and low pressure switches, service ports and high capacity filter drier.
- » All units use large face area outdoor coils.
- » Copper tube / aluminum fin coils on evaporator
- » Microchannel heat exchanger technology on all condenser coils for improved performance and reduced refrigerant load.



Controls and Wiring

Packaged rooftop units come equipped with a well-organized, large, easy to use, weatherproof internal control box with easy access, for a better user experience.

- » Units are factory-wired with color-coded wires and complete 24-volt Electromechanical controls package.
- » Units include single-point power entry as standard and also available with electric heat kits if selected.
- » Terminal strips are provided as standard for easy installation and field power wiring.

Filtration

Unit provides a draw-through filter section as standard for better air quality and long lasting component maintenance.

- » Filters installed on the units are standard off the shelf sizes for easy replacement.
- » 2" deep filters standard on all units with option for up to 4" on large chassis (15 tons and over).

Heating Section

Wide range of electric heat selections effectively handle most comfort heating demand from morning warm-up control to full heat.

Electric Heat

ETL approved electric heat is factory assembled, installed and tested.


- » Heating control is fully integrated into the unit's control system for quick start-up and reliable control.
- » Multi-stage capability for application flexibility.
- » Durable low watt density, nickel chromium elements provide longer life (compared to units without)..

- » Fuses are provided in each branch circuit to a maximum of 48 Amps per NEC requirements.
- » Single-point power connection reduces installation cost.
- » Operational safeties for electric heat includes automatic reset, and high temperature limit protection to prevent electric heat operation in the event of no airflow.

Electrical

Units are completely wired and tested at the factory to provide faster commissioning and start-up.

- » Wiring complies with NEC requirements and all applicable UL standards.
- » Units are factory-wired with color-coded wires and complete 24-volt electromechanical controls package.
- » A 115 V GFI convenience outlet requiring independent power supply for the receptacle is optional.
- » An optional unit powered 20 amp 115 V convenience outlet, complete with factory mounted transformer, disconnect switch, and primary and secondary overload protection, eliminates the need to pull a separate 115 V power source.
- » Supply air fan, compressor, and condenser fan motor branch circuits have individual short circuit protection. Unit includes knockouts in the bottom of the main control panels for field wiring entrance.
- » A single-point power connection with power block is standard and a terminal strip is provided for connecting low voltage control wiring.
- » For better serviceability an optional non-fused disconnect switch is mounted inside the control panel and operated by an externally mounted handle to disconnect the electrical power at the unit.

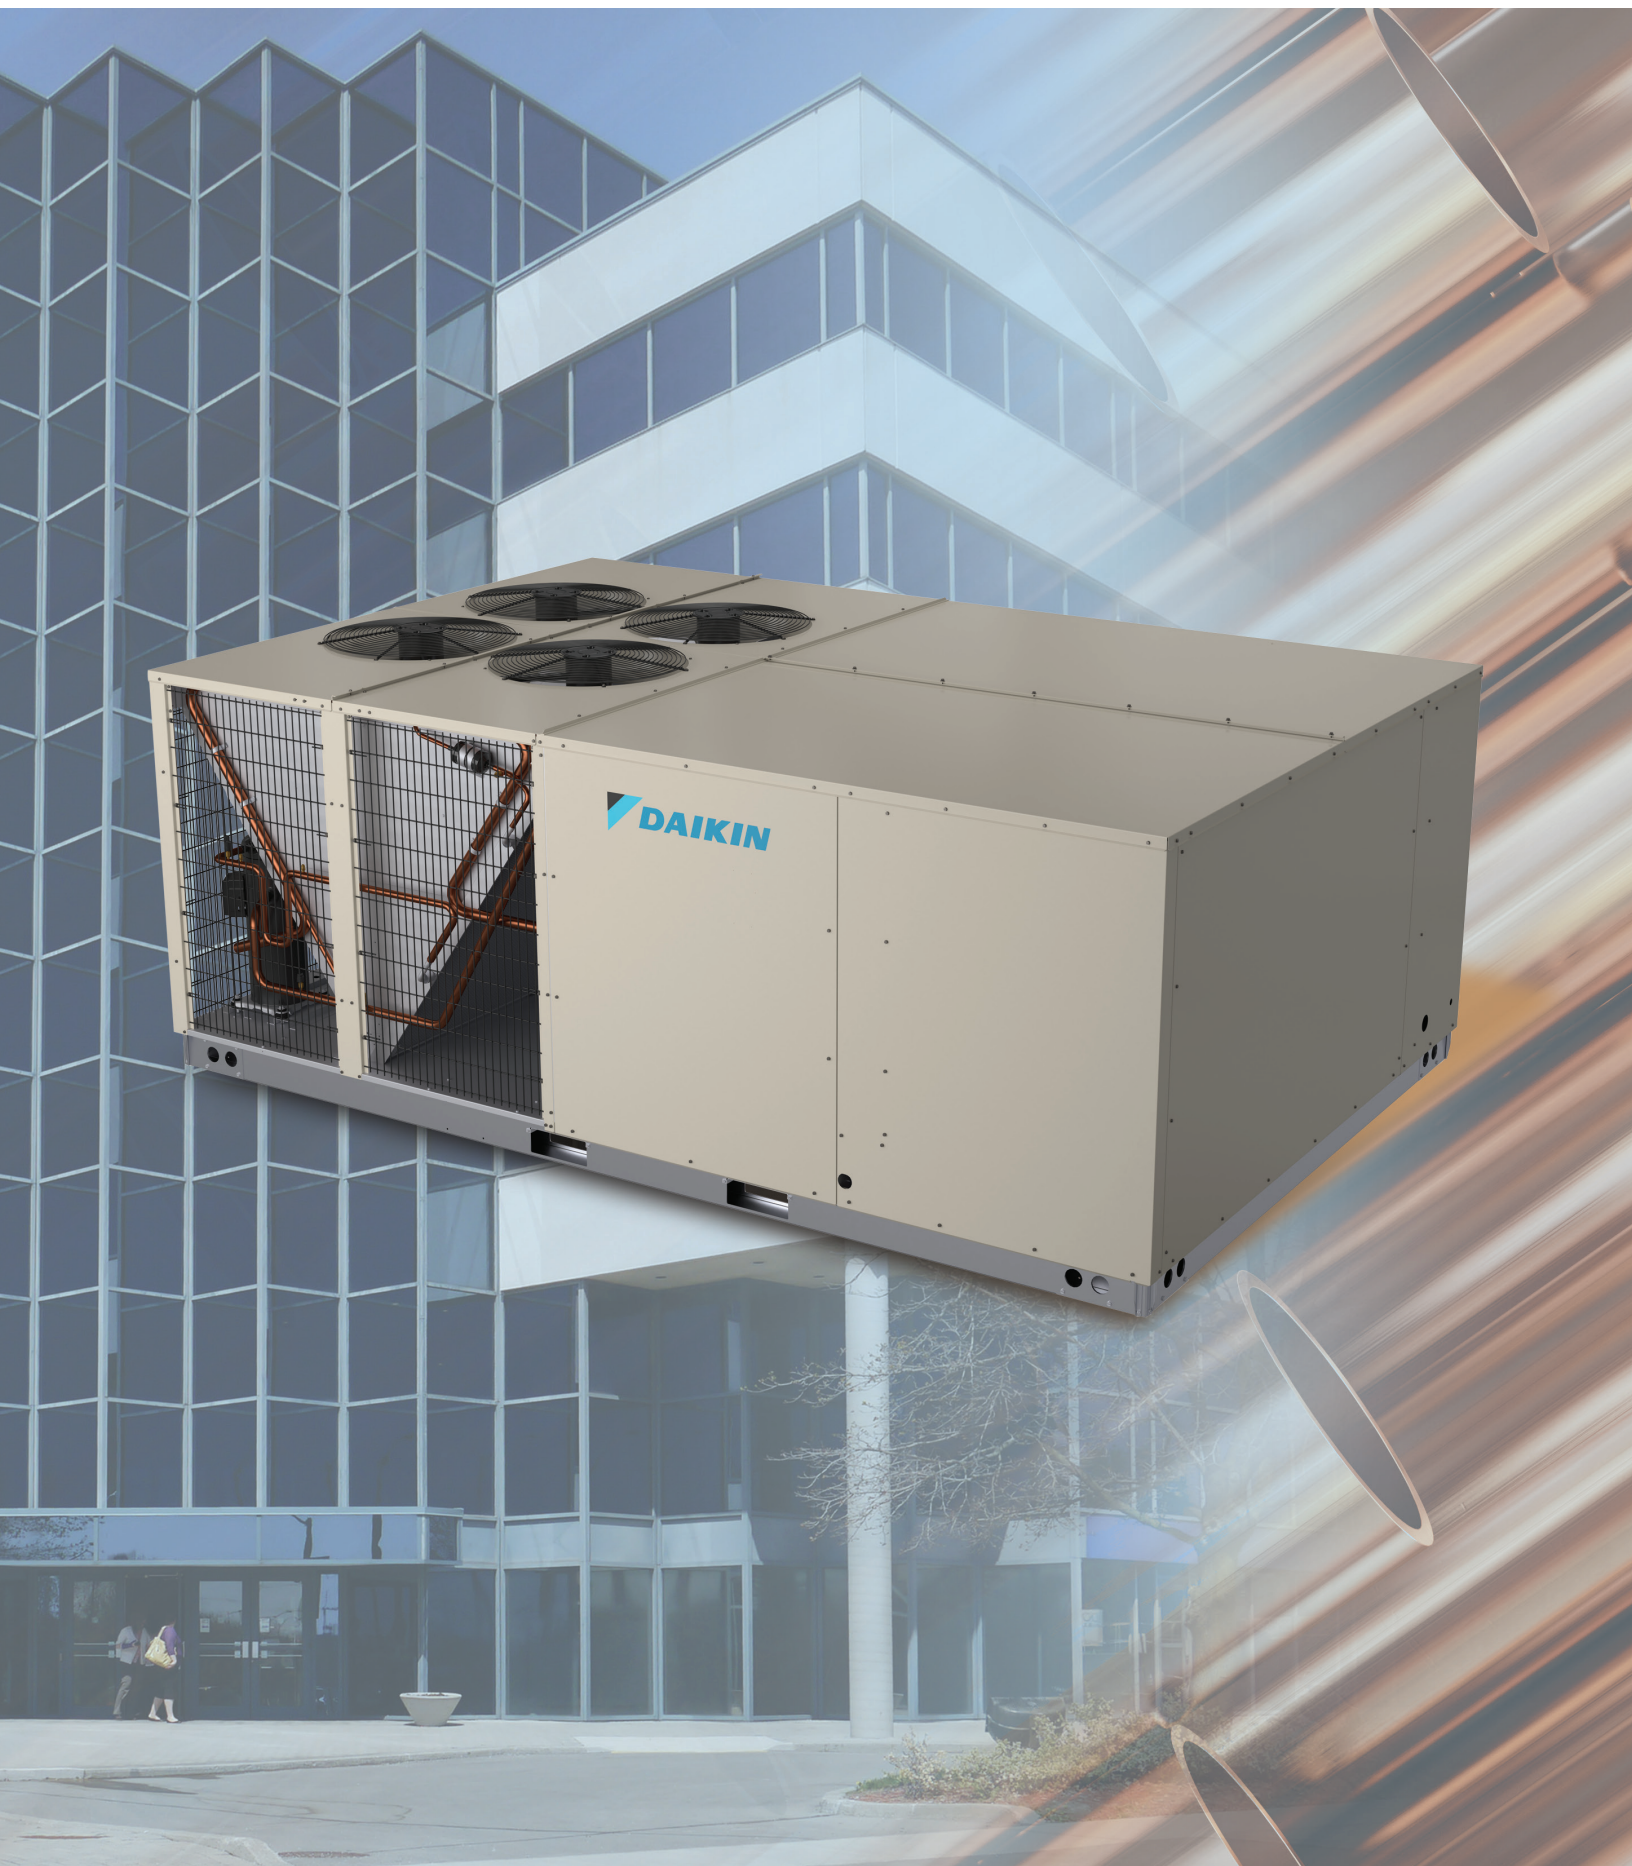

Applications

Daikin Rooftop units are intended for comfort cooling applications in normal heating, ventilating, and air conditioning. Consult your local Daikin sales representative for applications involving operations at high ambient temperatures, high altitudes, non-cataloged voltages, or for job-specific unit selections that fall outside of the range of the catalog tables.

For proper operation, units should be rigged in accordance with instructions stated on the installation manual. Fire dampers, if required, must be installed in the ductwork according to local and/or state codes. No space is allowed for these dampers in the unit.

Follow factory check, test and start procedures explicitly to achieve satisfactory start-up and operation.

Most rooftop applications take advantage of the significant energy savings provided with economizer operation. When an economizer system is used, mechanical refrigeration is typically not required below an ambient temperature of 50°F on most cases.

Serviceability

Daikin packaged rooftop units are built with serviceability in mind, designed to make future maintenance and service on the unit easy and accessible.

- » Our packaged rooftop units offer a slide out blower to facilitate the access and removal of the fan.
- » Independent compressor outside of the air bypass to eliminate component blockage and provide easy access.
- » Color coded wire to identify point-to-point component connections.
- » Condenser clean out from inside-out.
- » Easy access to control panel.



PHYSICAL DATA COOLING			
Model	DSC1803D000001S	DSC1804D000001S	DSC1807D000001S
COOLING CAPACITY			
Total BTU/H	172,000	172,000	172,000
EER	11	11	11
IEER	14.2	14.2	14.2
AHRI Reference #			
EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard
Wheel Dia. X Width	15 x 15	15 x 15	15 x 15
Indoor Nominal CFM	5000	5000	5000
RPM	300-1600	300-1600	300-1600
Indoor Horsepower	3.5	3.5	3.5
Filter Size (in)	20 X 20 X 2 (8)	20 X 20 X 2 (8)	20 X 20 X 2 (8)
Drain Size (NPT)	1"	1"	1"
R-32 Refrigerant Charge (oz.) (1)	105	105	105
R-32 Refrigerant Charge (oz.) (2)	90	90	90
Evaporator Coil Face Area (ft ²)	21.69	21.69	21.69
Rows Deep/ Fins per Inch	2/18	2/18	2/18
CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER)			
Quantity of Condenser Fan Motors	3	3	3
RPM (High/Low stage)	1122	1050	1050
Outdoor Horsepower	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3
Face Area (ft ²)	25.7	25.7	25.7
Rows Deep / Fins per Inch	1/23	1/23	1/23
COMPRESSOR			
Quantity / Type / Stages per Compression	2 / Scroll / 1	2 / Scroll / 1	2 / Scroll / 1
Compressor RLA / LRA	25.0 / 179	10.9 / 103.0	8.4 / 78.0
ELECTRICAL DATA			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	575-3-60
Indoor Blower FLA	10.9	7.2	5
Max External Static (In. W.C.)	1.2	1.2	1.2
Outdoor Fan FLA	2	0.85	0.67
Min. Circuit Ampacity ¹	84.1/84.1	41.4	31
Max. Overcurrent Protection (A) ²	100/100	50	35
Power Supply Conduit Hole Dia. (in)	2.5	2.5	2.5
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)			
	1736	1736	1736
SHIPPING WEIGHT (LBS.)			
	1851	1851	1851

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

PHYSICAL DATA COOLING			
Model	DSC2403D000001S	DSC2404D000001S	DSC2407D000001S
COOLING CAPACITY			
Total BTU/H	230,000	230,000	230,000
EER	11	11	11
IEER	14.2	14.2	14.2
AHRI Reference #			
EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard
Wheel Dia. X Width	15 x 15	15 x 15	15 x 15
Indoor Nominal CFM	6500	6500	6500
RPM	300-1600	300-1600	300-1600
Indoor Horsepower	3.5	3.5	3.5
Filter Size (in)	20 X 20 X 2 (8)	20 X 20 X 2 (8)	20 X 20 X 2 (8)
Drain Size (NPT)	1"	1"	1"
R-32 Refrigerant Charge (oz.) (1)	150	150	150
R-32 Refrigerant Charge (oz.) (2)	140	140	140
Evaporator Coil Face Area (ft²)	21.69	21.69	21.69
Rows Deep/ Fins per Inch	4/18	4/18	4/18
CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER)			
Quantity of Condenser Fan Motors	4	4	4
RPM (High/Low stage)	1130	1115	1075
Outdoor Horsepower	1/2	1/2	1/2
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3
Face Area (ft²)	25.7	25.7	25.7
Rows Deep / Fins per Inch	1/23	1/23	1/23
COMPRESSOR			
Quantity / Type / Stages per Compression	2 / Scroll / 1	2 / Scroll / 1	2 / Scroll / 1
Compressor RLA / LRA	29.4 / 225	13.7 / 130.0	10.9 / 93.7
ELECTRICAL DATA			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	575-3-60
Indoor Blower FLA	10.9	7.2	5
Max External Static (In. W.C.)	1.2	1.2	1.2
Outdoor Fan FLA	2.7	1.4	1
Min. Circuit Ampacity ¹	98.7/98.7	50.8	38.5
Max. Overcurrent Protection (A) ²	125/125	60	45
Power Supply Conduit Hole Dia. (in)	2.5	2.5	2.5
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)			
	2089	2089	2089
SHIPPING WEIGHT (LBS.)			
	2204	2204	2204

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

PHYSICAL DATA COOLING			
Model	DSC3003D000001S	DSC3004D000001S	DSC3007D000001S
COOLING CAPACITY			
Total BTU/H	290,000	290,000	290,000
EER	10	10	10
IEER	13.2	13.2	13.2
AHRI Reference #			
EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard
Wheel Dia. X Width	15 x 15	15 x 15	15 x 15
Indoor Nominal CFM	8200	8200	8200
RPM	300-1600	300-1600	300-1600
Indoor Horsepower	5	5	5
Filter Size (in)	20 X 20 X 2 (8)	20 X 20 X 2 (8)	20 X 20 X 2 (8)
Drain Size (NPT)	1"	1"	1"
R-32 Refrigerant Charge (oz.) (1)	165	165	165
R-32 Refrigerant Charge (oz.) (2)	165	165	165
Evaporator Coil Face Area (ft ²)	21.69	21.69	21.69
Rows Deep/ Fins per Inch	4/18	4/18	4/18
CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER)			
Quantity of Condenser Fan Motors	5	5	5
RPM (High/Low stage)	1130	1115	1075
Outdoor Horsepower	1/2	1/2	1/2
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3
Face Area (ft ²)	25.7	25.7	25.7
Rows Deep / Fins per Inch	1/23	1/23	1/23
COMPRESSOR			
Quantity / Type / Stages per Compression	2 / Scroll / 1	2 / Scroll / 1	2 / Scroll / 1
Compressor RLA / LRA	35.3 / 270	20.5 / 147	13.8 / 109.0
ELECTRICAL DATA			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	575-3-60
Indoor Blower FLA	14.5	10.6	7.2
Max External Static (In. W.C.)	1.2	1.2	1.2
Outdoor Fan FLA	2.7	1.4	1
Min. Circuit Ampacity ¹	122/122	74.3	50.4
Max. Overcurrent Protection (A) ²	150/150	90	60
Power Supply Conduit Hole Dia. (in)	2.5	2.5	2.5
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)			
	2129	2129	2129
SHIPPING WEIGHT (LBS.)			
	2244	2244	2244

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Coil Dimensions

MODEL	SIZE	FIN HEIGHT IN.	FIN LENGTH IN.
DSC	15	40	78.092
DSC	20	40	78.092
DSC	25	40	78.092

AHRI Ratings

MODEL	CAPACITY	EER	IEER
DSC1803D000001S	172,000	11.0	14.2
DSC1804D000001S	172,000	11.0	14.2
DSC1807D000001S	172,000	11.0	14.2
DSC2403D000001S	230,000	11.0	14.2
DSC2404D000001S	230,000	11.0	14.2
DSC2407D000001S	230,000	11.0	14.2
DSC3003D000001S	290,000	10.00	13.2
DSC3004D000001S	290,000	10.00	13.2
DSC3007D000001S	290,000	10.00	13.2

Sound Data

STATIC PRESSURE										
	Component	A-Weighted	63	125	250	500	1000	2000	4000	8000
STD	Discharge	79.1	90.5	82.3	79.7	78.7	73.0	67.6	64.4	53.7
	Inlet	78.5	93.0	87.3	80.9	75.1	72.2	67.6	64.4	53.7
HIGH	Discharge	84.6	91.4	87.3	86.1	84.1	78.7	73.4	69.8	60.0
	Inlet	76.9	91.6	86.6	84.1	70.9	66.5	60.3	58.7	49.7
	Outdoor	80.4	99.9	86.2	78.7	75.3	74.5	72.3	69.3	63.1

STATIC PRESSURE										
	Component	A-Weighted	63	125	250	500	1000	2000	4000	8000
STD	Discharge	79.6	87.9	81.7	81.0	79.0	74.0	67.4	65.0	55.7
	Inlet	70.3	89.7	81.7	74.8	62.4	58.7	54.5	53.6	47.2
HIGH	Discharge	84.6	83.5	84.9	84.4	83.8	79.9	73.4	70.1	62.6
	Inlet	72.3	82.1	79.3	75.0	71.2	64.5	61.6	59.1	51.9
	Outdoor	92.1	109.4	96.5	96.5	87.7	84.3	81.2	75.0	68.7

STATIC PRESSURE										
	Component	A-Weighted	63	125	250	500	1000	2000	4000	8000
STD	Discharge	86.4	85.7	87.4	88.4	85.6	81.2	74.5	70.5	61.1
	Inlet	74.4	88.1	82.8	81.4	68.1	66.2	59.1	56.1	46.5
HIGH	Discharge	86.5	89.7	88.3	88.0	85.3	81.7	75.4	71.0	61.7
	Inlet	76.0	89.8	87.4	80.0	69.7	68.3	61.7	58.0	48.6
	Outdoor	91.3	107.7	94.7	92.5	87.9	85.2	82.5	78.3	68.7


dB - decibel

¹ Indoor sound data is measured in accordance with AHRI 260. Outdoor sound is measured in accordance with AHRI 370

² Measurements are expressed in terms of sound power. Do not compare these values to sound pressure values because sound pressure depends on specific environment factors which normally do not match individual applications. Sound power values are independent of the environment and therefore more accurate.


³ A-weighted sound ratings filter out high and very low frequencies, to better approximate the response of "average" human ear. A-weighted measurements for Daikin units are taken in accordance with AHRI standard 260 for the indoor sound and AHRI 370 for the outdoor sound.

Dimensional Data

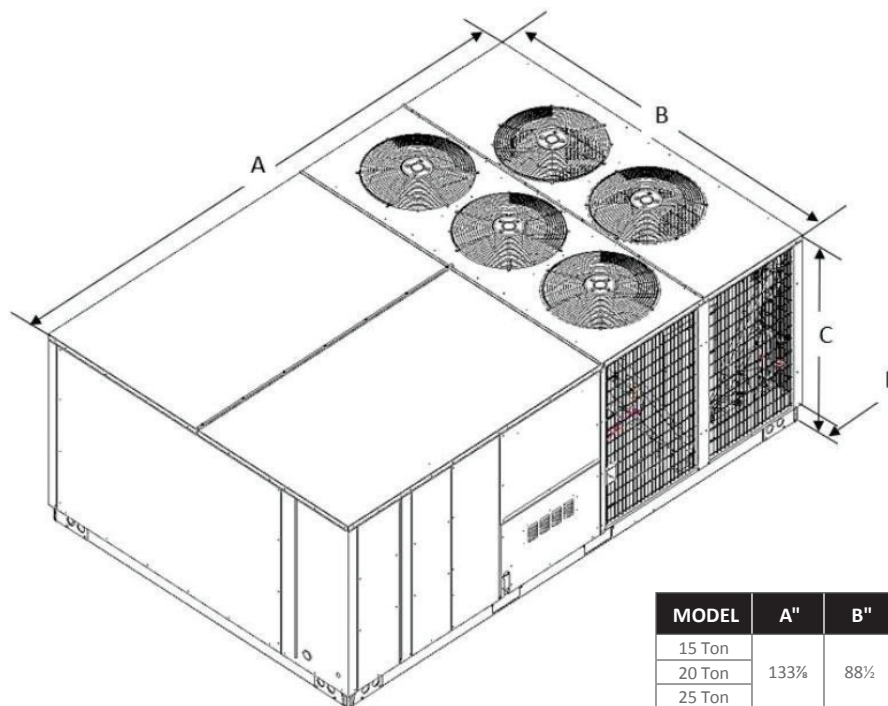


MODEL	A"	B"	C"	D"
15 Ton	133 $\frac{3}{8}$	88 $\frac{1}{2}$	51 $\frac{11}{16}$	5 $\frac{5}{32}$
20 Ton			51	
25 Ton			51	


NOTE: 15 ton has 3 fans; 20 ton has 4 fans; 25 ton has 5 fans

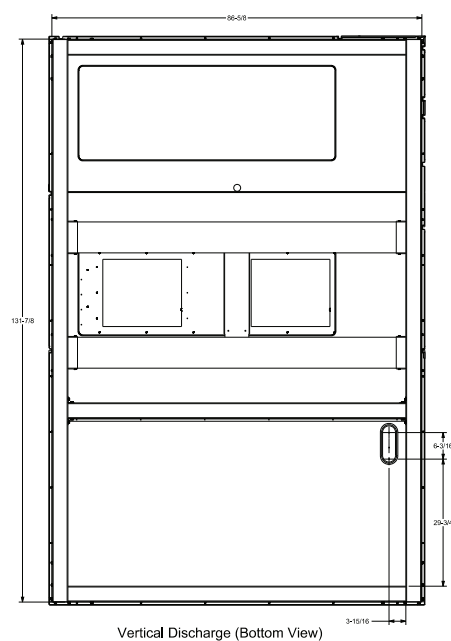

Vertical Discharge (Bottom View)

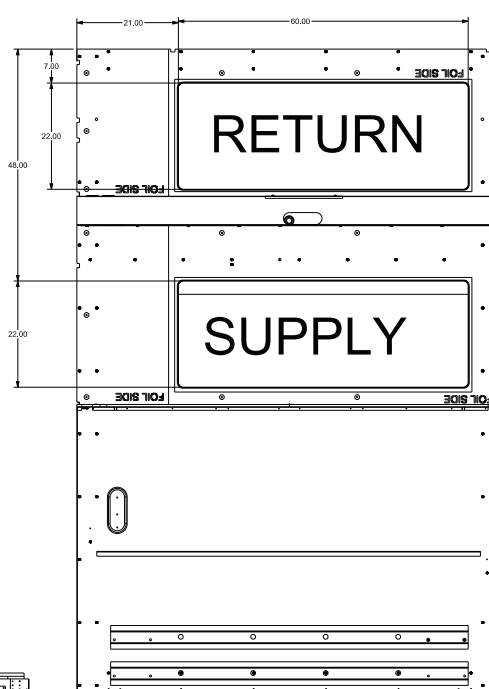

Vertical Discharge (Top View)

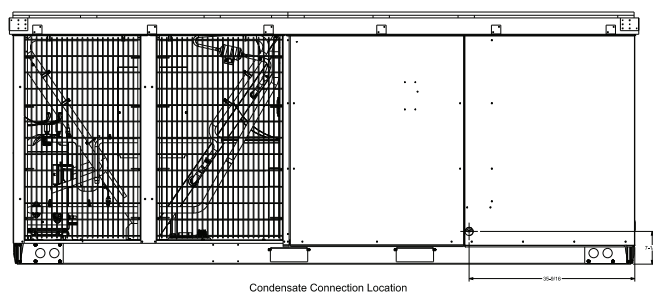

Condensate Connection Location

		Outdoor Ambient Temperature																		115													
		65						75						85						95						105							
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
4500	MBh	175.4	177.9	183.1	-	173.8	176.3	181.5	-	169.2	171.7	176.9	-	161.4	163.9	169.1	-	151.8	154.2	159.5	-	143.0	145.5	150.7	-	143.0	145.5	150.7	-	143.0	145.5	150.7	-
	S/T	0.59	0.51	0.39	-	0.59	0.52	0.39	-	0.62	0.54	0.42	-	0.64	0.56	0.43	-	0.66	0.58	0.46	-	0.70	0.63	0.50	-	0.70	0.63	0.50	-	0.70	0.63	0.50	-
	ΔT	21.09	19.11	15.43	-	21.03	19.06	15.38	-	21.31	19.34	15.66	-	21.01	19.04	15.36	-	20.75	18.78	15.09	-	21.98	20.01	16.33	-	21.98	20.01	16.33	-	21.98	20.01	16.33	-
	kW	10.92	10.91	10.89	-	12.33	12.32	12.30	-	13.91	13.90	13.87	-	15.61	15.60	15.58	-	17.52	17.51	17.48	-	19.75	19.74	19.72	-	19.75	19.74	19.72	-	19.75	19.74	19.72	-
	Hi PR	263	264	266	-	304	305	307	-	348	349	351	-	394	396	397	-	445	446	448	-	499	500	502	-	499	500	502	-	499	500	502	-
5012	Lo PR	114	115	118	-	121	122	125	-	127	128	131	-	132	133	136	-	137	138	141	-	143	144	147	-	143	144	147	-	143	144	147	-
	MBh	177.3	179.8	185.0	-	175.7	178.2	183.4	-	171.2	173.6	178.9	-	163.3	165.8	171.0	-	153.7	156.2	161.4	-	144.9	147.4	152.6	-	144.9	147.4	152.6	-	144.9	147.4	152.6	-
	S/T	0.63	0.56	0.43	-	0.64	0.57	0.44	-	0.66	0.59	0.46	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	1.00	0.68	0.55	-	1.00	0.68	0.55	-	1.00	0.68	0.55	-
	ΔT	20.13	18.16	14.48	-	20.08	18.10	14.42	-	20.35	18.38	14.70	-	20.06	18.08	14.40	-	19.79	17.82	14.14	-	21.03	19.06	15.37	-	21.03	19.06	15.37	-	21.03	19.06	15.37	-
	kW	10.98	10.97	10.95	-	12.39	12.38	12.36	-	13.97	13.96	13.93	-	15.67	15.66	15.64	-	17.58	17.56	17.54	-	19.81	19.80	19.77	-	19.81	19.80	19.77	-	19.81	19.80	19.77	-
6000	Hi PR	265	266	268	-	306	307	309	-	349	351	352	-	396	397	399	-	447	448	450	-	500	501	503	-	500	501	503	-	500	501	503	-
	Lo PR	115	116	119	-	122	123	126	-	128	129	132	-	133	134	137	-	138	139	142	-	144	146	149	-	144	146	149	-	144	146	149	-
	MBh	181.9	184.4	189.6	-	180.3	182.8	188.0	-	175.8	178.2	183.5	-	167.9	170.4	175.6	-	158.3	160.8	166.0	-	149.5	152.0	157.2	-	149.5	152.0	157.2	-	149.5	152.0	157.2	-
	S/T	0.67	0.60	0.47	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	0.72	0.65	0.52	-	0.74	0.67	0.54	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-
	ΔT	18.60	16.63	12.95	-	18.55	16.58	12.90	-	18.83	16.86	13.17	-	18.53	16.56	12.88	-	18.27	16.29	12.61	-	19.50	17.53	13.85	-	19.50	17.53	13.85	-	19.50	17.53	13.85	-
75	kW	11.07	11.06	11.04	-	12.48	12.47	12.45	-	14.06	14.05	14.02	-	15.76	15.75	15.73	-	17.67	17.66	17.63	-	19.90	19.89	19.87	-	19.90	19.89	19.87	-	19.90	19.89	19.87	-
	Hi PR	268	269	271	-	310	311	313	-	353	354	356	-	400	401	403	-	450	451	453	-	504	505	507	-	504	505	507	-	504	505	507	-
	Lo PR	118	119	122	-	125	126	129	-	131	132	135	-	136	137	140	-	141	142	145	-	147	149	152	-	147	149	152	-	147	149	152	-
	MBh	175.5	178.0	183.2	191.2	173.9	176.4	181.6	189.6	169.3	171.8	177.0	185.0	161.5	164.0	169.2	177.2	151.9	154.3	159.6	167.6	143.1	145.6	150.8	158.8	143.1	145.6	150.8	158.8	143.1	145.6	150.8	158.8
	S/T	0.71	0.64	0.51	0.4	0.72	0.64	0.51	0.4	0.74	0.67	0.54	0.4	0.76	0.69	0.56	0.4	1.00	0.71	0.58	0.4	1.00	0.76	0.63	0.5	1.00	0.76	0.63	0.5	1.00	0.76	0.63	0.5
4500	ΔT	25.42	23.45	19.77	16.0	25.37	23.40	19.71	15.9	25.64	23.67	19.99	16.2	25.35	23.37	19.69	15.9	25.08	23.11	19.43	15.6	26.32	24.35	20.66	16.8	26.32	24.35	20.66	16.8	26.32	24.35	20.66	16.8
	kW	10.91	10.90	10.88	11.0	12.32	12.31	12.29	12.4	13.90	13.89	13.86	14.0	15.60	15.59	15.57	15.7	17.51	17.50	17.47	17.6	19.74	19.73	19.71	19.8	19.74	19.73	19.71	19.8	19.74	19.73	19.71	19.8
	Hi PR	263	264	266	270.7	305	306	308	312.1	348	349	351	355.5	395	396	398	402.2	445	446	448	452.6	499	500	502	506.3	499	500	502	506.3	499	500	502	506.3
	Lo PR	114	115	118	122.8	121	122	125	129.7	127	128	131	135.7	132	133	136	140.8	137	138	141	145.8	143	144	147	152.1	143	144	147	152.1	143	144	147	152.1
	MBh	177.4	179.9	185.1	193.1	175.8	178.3	183.5	191.5	171.3	173.7	179.0	186.9	163.4	165.9	171.1	179.1	153.8	156.3	161.5	169.5	145.0	147.5	152.7	160.7	145.0	147.5	152.7	160.7	145.0	147.5	152.7	160.7
5012	S/T	0.75	0.68	0.55	0.4	0.76	0.69	0.56	0.4	0.78	0.71	0.58	0.4	0.80	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.80	0.67	0.5	1.00	0.80	0.67	0.5	1.00	0.80	0.67	0.5
	ΔT	24.47	22.49	18.81	15.0	24.41	22.44	18.76	14.9	24.69	22.72	19.04	15.2	24.39	22.42	18.74	14.9	24.13	22.16	18.47	14.7	25.36	23.39	19.71	15.9	25.36	23.39	19.71	15.9	25.36	23.39	19.71	15.9
	kW	10.97	10.96	10.94	11.0	12.38	12.37	12.35	12.5	13.96	13.95	13.92	14.0	15.66	15.65	15.63	15.7	17.57	17.56	17.53	17.6	19.80	19.79	19.77	19.9	19.80	19.79	19.77	19.9	19.80	19.79	19.77	19.9
	Hi PR	265	266	268	272.5	306	307	309	313.9	350	351	353	357.3	396	398	399	404.0	447	448	450	454.4	501	502	504	508.1	501	502	504	508.1	501	502	504	508.1
	Lo PR	115	116	119	124.1	122	123	126	131.0	128	129	132	137.1	133	134	137	142.2	138	139	142	147.2	144	146	149	153.5	144	146	149	153.5	144	146	149	153.5
6000	MBh	182.0	184.5	189.7	197.7	180.4	182.9	188.1	196.1	175.9	178.3	183.6	191.5	168.0	170.5	175.7	183.7	158.4	160.9	166.1	174.1	149.6	152.1	157.3	165.3	149.6	152.1	157.3	165.3	149.6	152.1	157.3	165.3
	S/T	0.79	0.72	0.59	0.5	0.80	0.73	0.60	0.5	0.82	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	0.84	0.71	0.6	1.00	0.84	0.71	0.6	1.00	0.84	0.71	0.6
	ΔT	22.94	20.97	17.29	13.5	22.89	20.91	17.23	13.4	23.16	21.19	17.51	13.7	22.87	20.89	17.21	13.4	22.60	20.63	16.95	13.1	23.84	21.86	18.18	14.4	23.84	21.86	18.18	14.4	23.84	21.86	18.18	14.4
	kW	11.06	11.05	11.03	11.1	12.48	12.46	12.44	12.5	14.05	14.04	14.02	14.1	15.76	15.74	15.72	15.8	17.66	17.65	17.62	17.7	19.89	19.88	19.86	20.0	19.89	19.88	19.86	20.0	19.89	19.88	19.86	20.0
	Hi PR	268	269	271	275.9	310	311	313	317.3	353	354	356	360.7	400	401	403	407.4	450	451	453	457.8	504	505	507	511.6	504	505	507	511.6	504	505	507	511.6
75	Lo PR	118	119	122	127.2	125	126	129	134.1	131	132	135	140.1	136	137	140	145.2	141	142	145	150.2	147	149	152	156.5	147	149	152	156.5	147	149	152	156.5

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature

		Outdoor Ambient Temperature																							
		65				75				85				95				105				115			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
4500	MBh	176.4	178.9	184.1	192.1	174.8	177.3	182.5	190.5	170.3	172.7	178.0	185.9	162.4	164.9	240.0	178.1	152.8	155.3	160.5	168.5	144.0	146.5	151.7	159.7
	S/T	0.83	0.76	0.63	0.5	0.83	0.76	0.63	0.5	1.00	0.79	0.66	0.5	1.00	0.80	0.68	0.5	1.00	0.83	0.70	0.6	1.00	0.87	0.75	0.6
	ΔT	29.79	27.81	24.13	20.3	29.73	27.76	24.08	20.3	30.01	28.04	24.36	20.5	29.71	27.74	24.06	20.2	29.45	27.48	23.79	20.0	30.68	28.71	25.03	21.2
	kW	10.92	10.91	10.88	11.0	12.33	12.32	12.30	12.4	13.91	13.90	13.87	14.0	15.61	15.60	15.58	15.7	17.51	17.50	17.48	17.6	19.75	19.74	19.71	19.8
	Hi PR	264	265	267	271.1	305	306	308	312.6	348	350	351	356.0	395	396	398	402.7	445	447	448	453.0	499	500	502	506.8
5012	Lo PR	114	116	118	123.3	121	122	125	130.2	127	128	131	136.2	132	134	136	141.3	137	139	141	146.3	143	145	148	152.6
	MBh	178.3	180.8	186.0	194.0	176.7	179.2	184.4	192.4	172.2	174.6	179.9	187.8	164.3	166.8	172.0	180.0	154.7	157.2	162.4	170.4	145.9	148.4	153.6	161.6
	S/T	0.87	0.80	0.67	0.5	0.88	0.81	0.68	0.5	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.79	0.7
	ΔT	28.83	26.86	23.18	19.4	28.78	26.81	23.12	19.3	29.05	27.08	23.40	19.6	28.76	26.79	23.10	19.3	28.49	26.52	22.84	19.0	29.73	27.76	24.07	20.3
	kW	10.98	10.97	10.94	11.1	12.39	12.38	12.35	12.5	13.96	13.95	13.93	14.0	15.67	15.66	15.63	15.7	17.57	17.56	17.54	17.6	19.81	19.80	19.77	19.9
6000	Hi PR	265	267	268	273.0	307	308	310	314.4	350	351	353	357.8	397	398	400	404.5	447	448	450	454.9	501	502	504	508.6
	Lo PR	116	117	120	124.6	122	124	127	131.5	128	130	133	137.6	134	135	138	142.7	139	140	143	147.7	145	146	149	154.0
	MBh	182.9	185.4	190.6	198.6	181.3	183.8	189.0	197.0	176.8	179.2	184.5	192.4	168.9	171.4	176.6	184.6	159.3	161.8	167.0	175.0	150.5	153.0	158.2	166.2
	S/T	0.91	0.84	0.71	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.6	1.00	0.91	0.78	0.6	1.00	1.00	0.83	0.7
	ΔT	27.30	25.33	21.65	17.8	27.25	25.28	21.60	17.8	27.53	25.56	21.87	18.1	27.23	25.26	21.58	17.7	26.97	25.00	21.31	17.5	28.20	26.23	22.55	18.7
85	kW	11.07	11.06	11.04	11.1	12.48	12.47	12.45	12.6	14.06	14.05	14.02	14.1	15.76	15.75	15.73	15.8	17.67	17.66	17.63	17.7	19.90	19.89	19.87	20.0
	Hi PR	269	270	272	276.4	310	311	313	317.8	354	355	357	361.2	400	401	403	407.9	451	452	454	458.3	504	506	507	512.0
	Lo PR	119	120	123	127.7	125	127	130	134.6	131	133	136	140.6	137	138	141	145.7	142	143	146	150.7	148	149	152	157.0
	MBh	179.3	181.8	187.0	195.0	177.8	180.2	185.5	193.5	173.2	175.7	180.9	188.9	165.3	167.8	173.0	181.0	155.7	158.2	163.4	171.4	147.0	149.4	154.7	162.6
	S/T	1.00	0.85	0.72	0.6	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.6	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.7
4500	ΔT	33.66	31.69	28.00	24.2	33.60	31.63	27.95	24.1	33.88	31.91	28.23	24.4	33.58	31.61	27.93	24.1	33.32	31.35	27.67	23.9	34.55	32.58	28.90	25.1
	kW	10.95	10.94	10.91	11.0	12.36	12.35	12.32	12.4	13.93	13.92	13.90	14.0	15.64	15.63	15.60	15.7	17.54	17.53	17.51	17.6	19.78	19.77	19.74	19.8
	Hi PR	265	266	268	272.4	306	307	309	313.8	350	351	353	357.2	396	397	399	403.9	447	448	450	454.3	500	502	503	508.0
	Lo PR	116	117	120	125.0	123	124	127	131.9	129	130	133	137.9	134	135	138	143.0	139	140	143	148.0	145	147	149	154.3
	MBh	181.2	183.7	188.9	196.9	179.7	182.2	187.4	195.4	175.1	177.6	182.8	190.8	167.2	169.7	174.9	182.9	157.6	160.1	165.3	173.3	148.9	151.3	156.6	164.6
5012	S/T	1.00	0.90	0.77	0.6	1.00	0.90	0.77	0.6	1.00	0.93	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.89	0.8
	ΔT	32.70	30.73	27.05	23.2	32.65	30.68	26.99	23.2	32.93	30.95	27.27	23.5	32.63	30.66	26.97	23.2	32.36	30.39	26.71	22.9	33.60	31.63	27.95	24.1
	kW	11.01	10.99	10.97	11.1	12.42	12.41	12.38	12.5	13.99	13.98	13.96	14.1	15.70	15.69	15.66	15.8	17.60	17.59	17.57	17.7	19.83	19.82	19.80	19.9
	Hi PR	267	268	270	274.2	308	309	311	315.6	351	353	354	359.0	398	399	401	405.7	449	450	452	456.1	502	503	505	509.8
	Lo PR	117	119	122	126.3	124	126	128	133.2	130	132	134	139.3	135	137	140	144.4	140	142	145	149.4	147	148	151	155.7
6000	MBh	185.8	188.3	193.5	201.5	184.3	186.8	192.0	200.0	179.7	182.2	187.4	195.4	171.8	174.3	179.5	187.5	162.2	164.7	169.9	177.9	153.5	155.9	161.2	169.2
	S/T	1.00	0.94	0.81	0.7	1.00	0.94	0.81	0.7	1.00	0.97	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.93	0.8
	ΔT	31.18	29.20	25.52	21.7	31.12	29.15	25.47	21.7	31.40	29.43	25.75	21.9	31.10	29.13	25.45	21.6	30.84	28.87	25.18	21.4	32.07	30.10	26.42	22.6
	kW	11.10	11.09	11.06	11.2	12.51	12.50	12.47	12.6	14.09	14.07	14.05	14.2	15.79	15.78	15.75	15.9	17.69	17.68	17.66	17.8	19.93	19.92	19.89	20.0
	Hi PR	270	271	273	277.6	311	313	314	319.0	355	356	358	362.4	402	403	405	409.1	452	453	455	459.5	506	507	509	513.3
	Lo PR	120	122	125	129.4	127	129	131	136.2	133	135	137	142.3	138	140	143	147.4	143	145	148	152.4	150	151	154	158.7

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature

		Outdoor Ambient Temperature																															
		65				75				85				95				105				115											
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
6000	MBh	235.5	238.8	245.8	-	233.4	236.7	243.7	-	227.3	230.6	237.6	-	216.7	220.1	227.0	-	203.9	207.2	214.2	-	192.2	195.5	202.5	-								
	S/T	0.61	0.53	0.41	-	0.61	0.54	0.41	-	0.64	0.56	0.44	-	0.65	0.58	0.45	-	1.00	0.60	0.47	-	1.00	0.65	0.52	-								
	ΔT	20.70	18.72	15.04	-	20.64	18.67	14.99	-	20.92	18.95	15.27	-	20.62	18.65	14.97	-	20.36	18.39	14.71	-	21.59	19.62	15.94	-								
	kW	15.14	15.13	15.10	-	16.87	16.86	16.83	-	18.79	18.78	18.75	-	20.88	20.87	20.84	-	23.21	23.19	23.16	-	25.94	25.93	25.90	-								
	Hi PR	266	267	269	-	308	309	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-								
70	Lo PR	121	122	125	-	128	129	133	-	134	136	139	-	140	141	144	-	145	147	150	-	152	153	156	-								
	MBh	237.1	240.4	247.4	-	235.0	238.3	245.3	-	228.9	232.2	239.2	-	218.4	221.7	228.7	-	205.5	208.8	215.8	-	193.8	197.1	204.1	-								
	S/T	0.63	0.56	0.43	-	0.64	0.57	0.44	-	0.66	0.59	0.46	-	0.68	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.68	0.55	-								
	ΔT	20.13	18.16	14.48	-	20.08	18.10	14.42	-	20.35	18.38	14.70	-	20.06	18.08	14.40	-	19.79	17.82	14.14	-	21.03	19.06	15.37	-								
	kW	15.19	15.17	15.14	-	16.91	16.90	16.87	-	18.84	18.82	18.79	-	20.92	20.91	20.88	-	23.25	23.24	23.21	-	25.98	25.97	25.94	-								
8000	Hi PR	267	268	270	-	309	310	312	-	353	354	356	-	400	401	403	-	451	452	454	-	505	506	508	-								
	Lo PR	122	123	126	-	129	130	133	-	135	137	140	-	141	142	145	-	146	147	151	-	153	154	157	-								
	MBh	245.2	248.5	255.5	-	243.1	246.4	253.4	-	237.0	240.3	247.3	-	226.5	229.8	236.8	-	213.6	216.9	223.9	-	201.9	205.2	212.2	-								
	S/T	0.67	0.60	0.47	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-								
	ΔT	18.24	16.27	12.58	-	18.18	16.21	12.53	-	18.46	16.49	12.81	-	18.16	16.19	12.51	-	17.90	15.93	12.25	-	19.14	17.16	13.48	-								
75	kW	15.33	15.31	15.28	-	17.05	17.04	17.01	-	18.98	18.96	18.94	-	21.06	21.05	21.02	-	23.39	23.38	23.35	-	26.12	26.11	26.08	-								
	Hi PR	272	273	275	-	313	315	316	-	357	358	360	-	404	406	407	-	455	456	458	-	510	511	513	-								
	Lo PR	126	127	130	-	133	135	138	-	139	141	144	-	145	146	149	-	150	152	155	-	157	158	161	-								
	MBh	235.6	238.9	245.9	256.6	233.5	236.8	243.8	254.5	227.4	230.7	237.7	248.4	216.9	220.2	227.2	237.9	204.0	207.3	214.3	225.0	192.3	195.6	202.6	213.3								
	S/T	0.73	0.66	0.53	0.4	0.73	0.66	0.53	0.4	1.00	0.69	0.56	0.4	1.00	0.70	0.58	0.4	1.00	0.73	0.60	0.5	1.00	0.77	0.65	0.5								
6000	ΔT	25.03	23.06	19.38	15.6	24.98	23.01	19.32	15.5	25.26	23.28	19.60	15.8	24.96	22.99	19.30	15.5	24.69	22.72	19.04	15.2	25.93	23.96	20.28	16.5								
	kW	15.13	15.12	15.09	15.2	16.86	16.84	16.81	16.9	18.78	18.77	18.74	18.9	20.87	20.85	20.82	21.0	23.20	23.18	23.15	23.3	25.93	25.92	25.89	26.0								
	Hi PR	266	267	269	274.0	308	309	311	315.8	352	353	355	359.6	399	400	402	406.8	450	451	453	457.6	504	505	507	511.9								
	Lo PR	121	122	125	130.4	128	129	133	137.7	134	136	139	144.0	140	141	144	149.4	145	147	150	154.7	152	153	156	161.4								
	MBh	237.2	240.5	247.5	258.2	235.1	238.4	245.4	256.1	229.0	232.3	239.3	250.0	218.5	221.8	228.8	239.5	205.6	208.9	215.9	226.6	193.9	197.2	204.2	214.9								
6400	S/T	0.75	0.68	0.55	0.4	0.76	0.69	0.56	0.4	1.00	0.71	0.58	0.4	1.00	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.80	0.67	0.5								
	ΔT	24.47	22.49	18.81	15.0	24.41	22.44	18.76	14.9	24.69	22.72	19.04	15.2	24.39	22.42	18.74	14.9	24.13	22.16	18.47	14.7	25.36	23.39	19.71	15.9								
	kW	15.17	15.16	15.13	15.3	16.90	16.89	16.86	17.0	18.83	18.81	18.78	18.9	20.91	20.90	20.87	21.0	23.24	23.23	23.20	23.3	25.97	25.96	25.93	26.1								
	Hi PR	267	269	270	275.1	309	310	312	316.9	353	354	356	360.7	400	401	403	407.9	451	452	454	458.7	505	507	508	513.0								
	Lo PR	122	123	126	131.3	129	130	133	138.6	135	137	140	144.9	141	142	145	150.3	146	147	151	155.6	153	154	157	162.3								
8000	MBh	245.3	248.6	255.6	266.3	243.2	246.5	253.5	264.2	237.1	240.4	247.4	258.1	226.6	229.9	236.9	247.6	213.8	217.1	224.1	234.7	202.0	205.3	212.3	223.0								
	S/T	0.80	0.72	0.60	0.5	0.80	0.73	0.60	0.5	1.00	0.75	0.63	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.67	0.5	1.00	1.00	0.71	0.6								
	ΔT	22.57	20.60	16.92	13.1	22.52	20.55	16.87	13.1	22.80	20.83	17.14	13.3	22.50	20.53	16.85	13.0	22.24	20.26	16.58	12.8	23.47	21.50	17.82	14.0								
	kW	15.32	15.30	15.27	15.4	17.04	17.03	17.00	17.1	18.97	18.95	18.92	19.1	21.05	21.04	21.01	21.1	23.38	23.37	23.34	23.5	26.11	26.10	26.07	26.2								
	Hi PR	272	273	275	279.5	314	315	317	321.3	357	359	361	365.1	405	406	408	412.3	456	457	459	463.1	510	511	513	517.4								
	Lo PR	126	127	130	135.4	133	135	138	142.7	139	141	144	149.1	145	146	149	154.5	150	152	155	159.8	157	158	161	166.4								
	IDB: Entering Indoor Dry Bulb Temperature												Shaded area reflects ACCA (TVA) conditions										High and low pressures are measured at the liquid and suction access fittings.										

		Outdoor Ambient Temperature																							
		65				75				85				95				105				115			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
6000	MBh	236.8	240.1	247.1	257.8	234.7	238.0	245.0	255.7	228.6	231.9	238.9	249.6	218.1	221.4	240.0	239.1	205.2	208.6	215.5	226.2	193.5	196.8	203.8	214.5
	S/T	0.85	0.78	0.65	0.5	1.00	0.78	0.65	0.5	1.00	0.81	0.68	0.5	1.00	0.82	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.76	0.6
	ΔT	29.40	27.43	23.74	19.9	29.34	27.37	23.69	19.9	29.62	27.65	23.97	20.2	29.32	27.35	23.67	19.9	29.06	27.09	23.41	19.6	30.29	28.32	24.64	20.8
	kW	15.14	15.13	15.10	15.2	16.87	16.85	16.82	17.0	18.79	18.78	18.75	18.9	20.88	20.86	20.83	21.0	23.21	23.19	23.16	23.3	25.94	25.92	25.90	26.0
	Hi PR	267	268	270	274.5	309	310	312	316.3	352	354	355	360.1	400	401	403	407.2	450	452	453	458.1	505	506	508	512.4
80	Lo PR	121	123	126	130.9	129	130	133	138.2	135	136	139	144.6	140	142	145	150.0	146	147	150	155.3	152	154	157	161.9
	MBh	238.4	241.7	248.7	259.4	236.3	239.6	246.6	257.3	230.2	233.5	240.5	251.2	219.7	223.0	230.0	240.7	206.9	210.2	217.2	227.8	195.1	198.4	205.4	216.1
	S/T	0.87	0.80	0.67	0.5	1.00	0.81	0.68	0.5	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.7
	ΔT	28.83	26.86	23.18	19.4	28.78	26.81	23.12	19.3	29.05	27.08	23.40	19.6	28.76	26.79	23.10	19.3	28.49	26.52	22.84	19.0	29.73	27.76	24.07	20.3
	kW	15.18	15.17	15.14	15.3	16.91	16.90	16.87	17.0	18.84	18.82	18.79	18.9	20.92	20.91	20.88	21.0	23.25	23.23	23.21	23.3	25.98	25.97	25.94	26.1
8000	Hi PR	268	269	271	275.6	310	311	313	317.4	354	355	357	361.2	401	402	404	408.3	452	453	455	459.2	506	507	509	513.5
	Lo PR	122	124	127	131.8	129	131	134	139.1	136	137	140	145.5	141	143	146	150.9	147	148	151	156.2	153	155	158	162.8
	MBh	246.5	249.9	256.8	267.5	244.5	247.8	254.7	265.4	238.3	241.6	248.6	259.3	227.8	231.1	238.1	248.8	215.0	218.3	225.3	236.0	203.3	206.6	213.5	224.2
	S/T	1.00	0.84	0.71	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.7
	ΔT	26.94	24.97	21.29	17.5	26.89	24.91	21.23	17.4	27.16	25.19	21.51	17.7	26.86	24.89	21.21	17.4	26.60	24.63	20.95	17.1	27.84	25.86	22.18	18.4
6000	kW	15.32	15.31	15.28	15.4	17.05	17.04	17.01	17.1	18.98	18.96	18.93	19.1	21.06	21.05	21.02	21.1	23.39	23.38	23.35	23.5	26.12	26.11	26.08	26.2
	Hi PR	272	274	275	280.0	314	315	317	321.8	358	359	361	365.6	405	406	408	412.8	456	457	459	463.6	510	511	513	517.9
	Lo PR	126	128	131	136.0	134	135	138	143.3	140	141	145	149.6	145	147	150	155.0	151	152	155	160.3	157	159	162	167.0
85	MBh	240.8	244.1	251.1	261.7	238.7	242.0	249.0	259.6	232.6	235.9	242.8	253.5	222.0	225.3	232.3	243.0	209.2	212.5	219.5	230.2	197.5	200.8	207.8	218.4
	S/T	1.00	0.87	0.74	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.81	0.7	1.00	1.00	1.00	0.7
	ΔT	33.27	31.30	27.61	23.8	33.21	31.24	27.56	23.7	33.49	31.52	27.84	24.0	33.19	31.22	27.54	23.7	32.93	30.96	27.28	23.5	34.17	32.19	28.51	24.7
	kW	15.17	15.16	15.13	15.3	16.90	16.89	16.86	17.0	18.83	18.81	18.78	18.9	20.91	20.90	20.87	21.0	23.24	23.23	23.20	23.3	25.97	25.96	25.93	26.1
	Hi PR	268	269	271	275.7	310	311	313	317.5	354	355	357	361.3	401	402	404	408.5	452	453	455	459.3	506	507	509	513.6
6400	Lo PR	123	125	128	132.7	130	132	135	140.0	137	138	141	146.4	142	144	147	151.8	147	149	152	157.1	154	156	159	163.7
	MBh	242.4	245.7	252.7	263.3	240.3	243.6	250.6	261.2	234.2	237.5	244.5	255.1	223.6	227.0	233.9	244.6	210.8	214.1	221.1	231.8	199.1	202.4	209.4	220.0
	S/T	1.00	0.90	0.77	0.6	1.00	0.90	0.77	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	1.00	0.8
	ΔT	32.70	30.73	27.05	23.2	32.65	30.68	26.99	23.2	32.93	30.95	27.27	23.5	32.63	30.66	26.97	23.2	32.36	30.39	26.71	22.9	33.60	31.63	27.95	24.1
	kW	15.22	15.20	15.17	15.3	16.94	16.93	16.90	17.0	18.87	18.85	18.83	19.0	20.95	20.94	20.91	21.0	23.28	23.27	23.24	23.4	26.01	26.00	25.97	26.1
8000	Hi PR	269	270	272	276.8	311	312	314	318.6	355	356	358	362.4	402	403	405	409.6	453	454	456	460.4	507	508	510	514.7
	Lo PR	124	125	128	133.6	131	133	136	140.9	138	139	142	147.3	143	145	148	152.7	148	150	153	158.0	155	156	159	164.6
	MBh	250.5	253.8	260.8	271.5	248.4	251.7	258.7	269.4	242.3	245.6	252.6	263.3	231.8	235.1	242.1	252.7	218.9	222.2	229.2	239.9	207.2	210.5	217.5	228.2
	S/T	1.00	0.94	0.81	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.8
	ΔT	30.81	28.84	25.16	21.3	30.76	28.78	25.10	21.3	31.03	29.06	25.38	21.6	30.74	28.76	25.08	21.3	30.47	28.50	24.82	21.0	31.71	29.74	26.05	22.2
8000	kW	15.36	15.34	15.31	15.4	17.08	17.07	17.04	17.2	19.01	19.00	18.97	19.1	21.09	21.08	21.05	21.2	23.42	23.41	23.38	23.5	26.15	26.14	26.11	26.2
	Hi PR	274	275	277	281.2	315	317	318	323.1	359	360	362	366.9	406	408	409	414.0	457	458	460	464.9	512	513	515	519.1
	Lo PR	128	130	133	137.8	135	137	140	145.1	142	143	146	151.4	147	149	152	156.8	153	154	157	162.1	159	161	164	168.8

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (ITVA) conditions

IDB: Entering Indoor Dry Bulb Temperature

		Outdoor Ambient Temperature																											
		65				75				85				95				105				115							
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	7500	MBh	296.9	301.1	309.9	-	294.3	298.4	307.2	-	286.5	290.7	299.5	-	273.3	277.5	286.3	-	257.1	261.3	270.1	-	242.3	246.5	255.3	-			
		S/T	0.59	0.52	0.39	-	0.60	0.53	0.40	-	0.62	0.55	0.42	-	0.64	0.57	0.44	-	0.66	0.59	0.46	-	1.00	0.63	0.51	-			
		ΔT	20.52	18.56	14.91	-	20.46	18.51	14.86	-	20.74	18.78	15.13	-	20.44	18.49	14.84	-	20.18	18.23	14.58	-	21.41	19.45	15.80	-			
		kW	21.17	21.15	21.11	-	23.52	23.50	23.46	-	26.15	26.13	26.09	-	28.99	28.97	28.93	-	32.16	32.14	32.10	-	35.88	35.86	35.82	-			
		Hi PR	271	273	274	-	314	315	317	-	359	360	362	-	407	408	410	-	459	460	462	-	514	515	517	-			
8000	Lo PR	118	119	122	-	125	126	129	-	131	132	135	-	136	138	141	-	141	143	146	-	148	149	152	-				
	MBh	298.9	303.1	311.9	-	296.3	300.4	309.3	-	288.6	292.7	301.6	-	275.3	279.5	288.3	-	259.1	263.3	272.1	-	244.3	248.5	257.3	-				
	S/T	0.61	0.54	0.42	-	0.62	0.55	0.42	-	0.64	0.57	0.45	-	0.66	0.59	0.47	-	0.68	0.61	0.49	-	1.00	0.66	0.53	-				
	ΔT	19.96	18.00	14.35	-	19.90	17.95	14.30	-	20.18	18.22	14.57	-	19.88	17.93	14.28	-	19.62	17.67	14.02	-	20.84	18.89	15.24	-				
	kW	21.23	21.21	21.17	-	23.58	23.56	23.52	-	26.20	26.19	26.15	-	29.04	29.03	28.98	-	32.22	32.20	32.16	-	35.94	35.92	35.88	-				
10000	Hi PR	273	274	276	-	315	316	318	-	360	361	363	-	408	409	411	-	460	461	463	-	515	516	518	-				
	Lo PR	119	120	123	-	126	127	130	-	132	133	136	-	137	139	142	-	142	144	147	-	149	150	153	-				
	MBh	309.2	313.3	322.1	-	306.5	310.7	319.5	-	298.8	303.0	311.8	-	285.6	289.7	298.5	-	269.4	273.5	282.3	-	254.6	258.7	267.6	-				
	S/T	0.66	0.59	0.46	-	0.66	0.59	0.47	-	0.68	0.61	0.49	-	0.70	0.63	0.51	-	1.00	0.65	0.53	-	1.00	0.70	0.58	-				
	ΔT	18.08	16.12	12.48	-	18.03	16.07	12.42	-	18.30	16.35	12.70	-	18.01	16.05	12.40	-	17.75	15.79	12.14	-	18.97	17.01	13.36	-				
75	7500	kW	21.42	21.40	21.36	-	23.77	23.75	23.71	-	26.40	26.38	26.34	-	29.24	29.22	29.18	-	32.41	32.39	32.35	-	36.13	36.11	36.07	-			
		Hi PR	277	278	280	-	320	321	323	-	364	366	367	-	412	414	416	-	464	466	467	-	520	521	523	-			
		Lo PR	123	124	127	-	130	131	134	-	136	137	140	-	141	143	146	-	146	148	151	-	153	154	157	-			
		MBh	297.1	301.2	310.0	323.5	294.4	298.6	307.4	320.9	286.7	290.9	299.7	313.2	273.5	277.6	286.4	299.9	257.3	261.4	270.2	283.7	242.5	246.6	255.5	268.9			
		S/T	0.71	0.64	0.51	0.4	0.71	0.64	0.52	0.4	0.74	0.67	0.54	0.4	1.00	0.69	0.56	0.4	1.00	0.71	0.58	0.4	1.00	0.75	0.63	0.5			
8000	ΔT	24.81	22.86	19.21	15.4	24.76	22.81	19.16	15.4	25.04	23.08	19.43	15.6	24.74	22.79	19.14	15.4	24.48	22.52	18.88	15.1	25.70	23.75	20.10	16.3				
	kW	21.16	21.14	21.10	21.3	23.51	23.49	23.45	23.6	26.13	26.11	26.07	26.3	28.97	28.95	28.91	29.1	32.14	32.12	32.08	32.3	35.87	35.85	35.81	36.0				
	Hi PR	272	273	275	279.4	314	315	317	322.1	359	360	362	366.8	407	408	410	414.9	459	460	462	466.7	514	515	517	522.1				
	Lo PR	118	119	122	127.1	125	126	129	134.2	131	132	135	140.4	136	138	141	145.7	141	143	146	150.9	148	149	152	157.3				
	MBh	299.1	303.3	312.1	325.5	296.4	300.6	309.4	322.9	288.7	292.9	301.7	315.2	275.5	279.7	288.5	301.9	259.3	263.5	272.3	285.7	244.5	248.7	257.5	270.9				
10000	S/T	0.73	0.66	0.54	0.4	0.74	0.67	0.54	0.4	0.76	0.69	0.57	0.4	1.00	0.71	0.58	0.5	1.00	0.73	0.60	0.5	1.00	0.78	0.65	0.5				
	ΔT	24.25	22.30	18.65	14.9	24.20	22.25	18.60	14.8	24.47	22.52	18.87	15.1	24.18	22.23	18.58	14.8	23.92	21.96	18.31	14.5	25.14	23.19	19.54	15.8				
	kW	21.21	21.20	21.16	21.3	23.56	23.55	23.51	23.7	26.19	26.17	26.13	26.3	29.03	29.01	28.97	29.1	32.20	32.18	32.14	32.3	35.92	35.90	35.86	36.0				
	Hi PR	273	274	276	280.6	315	317	319	323.2	360	361	363	367.9	408	409	411	416.0	460	461	463	467.9	515	517	519	523.2				
	Lo PR	119	120	123	128.0	126	127	130	135.1	132	133	136	141.3	137	139	142	146.6	142	144	147	151.7	149	150	153	158.2				
IDB: Entering Indoor Dry Bulb Temperature	MBh	309.3	313.5	322.3	335.8	306.7	310.9	319.7	333.1	299.0	303.2	312.0	325.4	285.7	289.9	298.7	312.2	269.5	273.7	282.5	296.0	254.7	258.9	267.7	281.2				
	S/T	0.77	0.70	0.58	0.4	0.78	0.71	0.59	0.5	1.00	0.73	0.61	0.5	1.00	0.75	0.63	0.5	1.00	0.77	0.65	0.5	1.00	0.82	0.69	0.6				
	ΔT	22.38	20.42	16.77	13.0	22.32	20.37	16.72	12.9	22.60	20.64	16.99	13.2	22.30	20.35	16.70	12.9	22.04	20.09	16.44	12.7	23.27	21.31	17.66	13.9				
	kW	21.41	21.39	21.35	21.5	23.76	23.74	23.70	23.9	26.38	26.36	26.32	26.5	29.22	29.20	29.16	29.3	32.39	32.37	32.33	32.5	36.12	36.10	36.06	36.2				
	Hi PR	277	278	280	285.1	320	321	323	327.7	365	366	368	372.4	413	414	416	420.5	465	466	468	472.4	520	521	523	527.7				
	Lo PR	123	124	127	132.0	130	131	134	139.1	136	137	140	145.4	141	143	146	150.6	146	148	151	155.8	153	154	157	162.3				
		Shaded area reflects ACCA (TVA) conditions												High and low pressures are measured at the liquid and suction access fittings.															

		Outdoor Ambient Temperature																							
		65				75				85				95				105				115			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
7500	MBh	298.6	302.8	311.6	325.0	296.0	300.1	308.9	322.4	288.2	292.4	301.2	314.7	275.0	279.2	240.0	301.4	258.8	263.0	271.8	285.2	244.0	248.2	257.0	270.4
	S/T	0.82	0.75	0.63	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.66	0.5	1.00	0.80	0.68	0.5	1.00	0.82	0.70	0.6	1.00	1.00	0.74	0.6
	ΔT	29.14	27.19	23.54	19.8	29.09	27.13	23.48	19.7	29.36	27.41	23.76	20.0	29.07	27.11	23.46	19.7	28.81	26.85	23.20	19.4	30.03	28.08	24.43	20.6
	kW	21.17	21.15	21.11	21.3	23.52	23.50	23.46	23.6	26.14	26.12	26.08	26.3	28.98	28.96	28.92	29.1	32.16	32.14	32.10	32.3	35.88	35.86	35.82	36.0
	Hi PR	272	273	275	279.9	315	316	318	322.6	359	361	363	367.3	408	409	411	415.4	459	461	463	467.2	515	516	518	522.6
80	Lo PR	118	120	123	127.6	125	127	130	134.7	132	133	136	140.9	137	138	141	146.2	142	143	146	151.4	148	150	153	157.8
	MBh	300.6	304.8	313.6	327.1	298.0	302.1	311.0	324.4	290.3	294.4	303.3	316.7	277.0	281.2	290.0	303.5	260.8	265.0	273.8	287.3	246.0	250.2	259.0	272.5
	S/T	0.85	0.78	0.65	0.5	1.00	0.78	0.66	0.5	1.00	0.81	0.68	0.6	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	1.00	0.77	0.6
	ΔT	28.58	26.63	22.98	19.2	28.53	26.57	22.92	19.1	28.80	26.85	23.20	19.4	28.51	26.55	22.90	19.1	28.25	26.29	22.64	18.9	29.47	27.51	23.87	20.1
	kW	21.23	21.21	21.17	21.3	23.58	23.56	23.52	23.7	26.20	26.18	26.14	26.3	29.04	29.02	28.98	29.2	32.21	32.19	32.15	32.3	35.94	35.92	35.88	36.1
10000	Hi PR	273	274	276	281.1	316	317	319	323.7	361	362	364	368.4	409	410	412	416.5	461	462	464	468.4	516	517	519	523.7
	Lo PR	119	121	124	128.5	126	128	131	135.6	132	134	137	141.8	138	139	142	147.1	143	144	147	152.3	149	151	154	158.7
	MBh	310.9	315.0	323.8	337.3	308.2	312.4	321.2	334.7	300.5	304.7	313.5	327.0	287.3	291.4	300.2	313.7	271.1	275.2	284.0	297.5	256.3	260.4	269.3	282.7
	S/T	1.00	0.82	0.70	0.6	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7
	ΔT	26.70	24.75	21.10	17.3	26.65	24.70	21.05	17.3	26.93	24.97	21.32	17.5	26.63	24.68	21.03	17.2	26.37	24.42	20.77	17.0	27.59	25.64	21.99	18.2
85	kW	21.42	21.40	21.36	21.5	23.77	23.75	23.71	23.9	26.39	26.38	26.33	26.5	29.23	29.21	29.17	29.4	32.41	32.39	32.35	32.5	36.13	36.11	36.07	36.2
	Hi PR	278	279	281	285.6	320	322	324	328.2	365	366	368	372.9	413	414	416	421.0	465	466	468	472.9	520	522	524	528.2
	Lo PR	123	125	128	132.6	130	132	135	139.7	136	138	141	145.9	142	143	146	151.2	147	148	151	156.3	153	155	158	162.8
	MBh	303.6	307.7	316.5	330.0	300.9	305.1	313.9	327.4	293.2	297.4	306.2	319.7	280.0	284.1	292.9	306.4	263.8	267.9	276.7	290.2	249.0	253.1	262.0	275.4
	S/T	1.00	0.85	0.72	0.6	1.00	0.85	0.73	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.7
7500	ΔT	32.98	31.02	27.37	23.6	32.93	30.97	27.32	23.5	33.20	31.25	27.60	23.8	32.91	30.95	27.30	23.5	32.64	30.69	27.04	23.3	33.87	31.91	28.26	24.5
	kW	21.21	21.20	21.15	21.3	23.56	23.55	23.51	23.7	26.19	26.17	26.13	26.3	29.03	29.01	28.97	29.1	32.20	32.18	32.14	32.3	35.92	35.90	35.86	36.0
	Hi PR	273	275	276	281.2	316	317	319	323.9	361	362	364	368.5	409	410	412	416.6	461	462	464	468.5	516	517	519	523.9
	Lo PR	120	121	124	129.4	127	129	131	136.5	133	135	138	142.7	139	140	143	148.0	144	145	148	153.1	150	152	155	159.6
	MBh	305.6	309.8	318.6	332.0	302.9	307.1	315.9	329.4	295.2	299.4	308.2	321.7	282.0	286.2	295.0	308.4	265.8	270.0	278.8	292.2	251.0	255.2	264.0	277.4
8000	S/T	1.00	0.87	0.75	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.7
	ΔT	32.42	30.46	26.81	23.0	32.36	30.41	26.76	23.0	32.64	30.68	27.03	23.3	32.34	30.39	26.74	23.0	32.08	30.13	26.48	22.7	33.31	31.35	27.70	23.9
	kW	21.27	21.25	21.21	21.4	23.62	23.60	23.56	23.7	26.25	26.23	26.19	26.4	29.09	29.07	29.03	29.2	32.26	32.24	32.20	32.4	35.98	35.96	35.92	36.1
	Hi PR	275	276	278	282.3	317	318	320	325.0	362	363	365	369.7	410	411	413	417.8	462	463	465	469.6	517	518	520	525.0
	Lo PR	121	122	125	130.2	128	129	132	137.3	134	136	139	143.6	139	141	144	148.8	145	146	149	154.0	151	153	155	160.5
10000	MBh	315.8	320.0	328.8	342.3	313.2	317.4	326.2	339.6	305.5	309.7	318.5	331.9	292.2	296.4	305.2	318.7	276.0	280.2	289.0	302.5	261.2	265.4	274.2	287.7
	S/T	1.00	0.91	0.79	0.7	1.00	0.92	0.79	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	1.00	0.8
	ΔT	30.54	28.59	24.94	21.2	30.49	28.53	24.88	21.1	30.76	28.81	25.16	21.4	30.47	28.51	24.86	21.1	30.21	28.25	24.60	20.8	31.43	29.48	25.83	22.0
	kW	21.46	21.45	21.41	21.6	23.81	23.80	23.76	23.9	26.44	26.42	26.38	26.6	29.28	29.26	29.22	29.4	32.45	32.43	32.39	32.6	36.17	36.15	36.11	36.3
	Hi PR	279	280	282	286.9	322	323	325	329.5	366	368	369	374.2	414	416	418	422.3	466	468	469	474.1	522	523	525	529.5
	Lo PR	125	126	129	134.3	132	133	136	141.4	138	140	143	147.6	144	145	148	152.9	149	150	153	158.1	155	157	160	164.5

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature

DSC1803W High Static						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1*	0.2	6622	626	626	0.25	0.25
	0.4	6195	666	667	0.27	0.27
	0.6	5791	709	706	0.28	0.28
	0.8	5392	749	748	0.30	0.30
	1	4960	789	792	0.31	0.32
	1.2	4503	836	836	0.33	0.33
	1.4	3515	956	911	0.38	0.36
	1.6	2887	998	978	0.40	0.39
	1.8	2360	1047	1020	0.42	0.41
	2	1807	1082	1067	0.43	0.43
T2*	2.2	1305	1109	1103	0.44	0.44
	0.2	6622	626	626	0.25	0.25
	0.4	6195	666	667	0.27	0.27
	0.6	5791	709	706	0.28	0.28
	0.8	5392	749	748	0.30	0.30
	1	4960	789	792	0.31	0.32
	1.2	4503	836	836	0.33	0.33
	1.4	3515	956	911	0.38	0.36
	1.6	2887	998	978	0.40	0.39
	1.8	2360	1047	1020	0.42	0.41
T3	2	1807	1082	1067	0.43	0.43
	2.2	1305	1109	1103	0.44	0.44
	0.2	8201	738	736	0.84	0.84
	0.4	7841	776	774	0.89	0.88
	0.6	7516	814	811	0.93	0.93
	0.8	7185	852	849	0.97	0.97
	1	6864	887	885	1.01	1.01
	1.2	6517	926	923	1.06	1.05
	1.4	5970	991	973	1.13	1.11
	1.6	5502	1033	1020	1.18	1.16
T4	1.8	5050	1082	1059	1.24	1.21
	2	4609	1122	1101	1.28	1.26
	2.2	4136	1164	1141	1.33	1.30
	0.2	8778	780	776	1.12	1.12
	0.4	8441	816	813	1.17	1.17
	0.6	8141	852	850	1.23	1.22
	0.8	7832	889	887	1.28	1.28
	1	7543	924	921	1.33	1.32
	1.2	7231	960	957	1.38	1.38
	1.4	6814	1009	998	1.45	1.44
	1.6	6401	1051	1039	1.51	1.50
	1.8	5980	1098	1077	1.58	1.55
	2	5580	1139	1117	1.64	1.61
	2.2	5126	1184	1157	1.70	1.67

DSC1803W HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T5	0.2	9286	816	811	1.40	1.39
	0.4	8969	851	848	1.46	1.46
	0.6	8688	886	884	1.52	1.52
	0.8	8398	923	920	1.58	1.58
	1	8132	956	952	1.64	1.63
	1.2	7849	990	987	1.70	1.69
	1.4	7530	1028	1022	1.76	1.75
	1.6	7162	1068	1059	1.83	1.82
	1.8	6771	1114	1096	1.91	1.88
	2	6407	1155	1134	1.98	1.95
T6	2.2	5974	1201	1173	2.06	2.01
	0.2	8163	925	854	1.33	1.23
	0.4	7902	953	880	1.37	1.27
	0.6	7642	979	913	1.41	1.31
	0.8	7399	1006	944	1.45	1.36
	1	7146	1033	976	1.49	1.41
	1.2	6893	1061	1010	1.53	1.45
	1.4	6626	1090	1047	1.57	1.51
	1.6	6349	1122	1082	1.61	1.56
	1.8	6035	1154	1118	1.66	1.61
T7	2	5765	1184	1148	1.70	1.65
	2.2	5401	1215	1189	1.75	1.71
	0.2	9129	805	800	2.63	1.63
	0.4	8806	840	837	2.75	1.71
	0.6	8519	876	873	2.86	1.78
	0.8	8224	912	910	2.98	1.86
	1	7951	946	942	3.09	1.92
	1.2	7659	981	977	3.21	1.99
	1.4	7312	1022	1015	3.34	2.07
	1.6	6930	1063	1053	3.47	2.15
T8	1.8	6530	1109	1090	3.62	2.22
	2	6154	1150	1128	3.76	2.30
	2.2	5715	1196	1168	3.91	2.38
	0.2	9286	816	811	2.67	1.65
	0.4	8969	851	848	2.78	1.73
	0.6	8688	886	884	2.90	1.80
	0.8	8398	923	920	3.02	1.88
	1	8132	956	952	3.12	1.94
	1.2	7849	990	987	3.24	2.01
	1.4	7530	1028	1022	3.36	2.08
T9	1.6	7162	1068	1059	3.49	2.16
	1.8	6771	1114	1096	3.64	2.23
	2	6407	1155	1134	3.78	2.31
	2.2	5974	1201	1173	3.93	2.39

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

DSC1803W HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T9	0.2	9405	825	820	2.70	1.67
	0.4	9091	860	856	2.81	1.75
	0.6	8815	894	892	2.92	1.82
	0.8	8529	930	928	3.04	1.89
	1	8268	963	960	3.15	1.96
	1.2	7991	997	994	3.26	2.03
	1.4	7692	1033	1028	3.38	2.10
	1.6	7334	1073	1064	3.51	2.17
	1.8	6951	1118	1100	3.65	2.24
	2	6595	1159	1138	3.79	2.32
T10	2.2	6168	1205	1177	3.94	2.40
	0.2	9495	831	826	2.72	1.68
	0.4	9185	866	862	2.83	1.76
	0.6	8911	901	898	2.94	1.83
	0.8	8629	936	934	3.06	1.90
	1	8371	969	965	3.17	1.97
	1.2	8098	1003	999	3.28	2.04
	1.4	7814	1037	1033	3.39	2.11
	1.6	7464	1076	1068	3.52	2.18
	1.8	7086	1121	1104	3.66	2.25
	2	6737	1162	1141	3.80	2.33
	2.2	6314	1208	1180	3.95	2.41

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

DFC2403W HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1*	0.2	6412	631	616	0.71	0.69
	0.4	6081	683	673	0.77	0.76
	0.6	5697	729	745	0.82	0.84
	0.8	5360	778	796	0.88	0.90
	1	4895	846	859	0.95	0.97
	1.2	4519	884	900	1.00	1.01
	1.4	4139	927	948	1.04	1.07
	1.6	3635	987	981	1.11	1.10
	1.8	3278	1034	1012	1.16	1.14
	2	2968	1070	1043	1.21	1.18
T2*	2.2	2662	1098	1083	1.24	1.22
	0.2	6797	651	632	0.81	0.79
	0.4	6471	700	688	0.88	0.86
	0.6	6099	746	753	0.93	0.94
	0.8	5784	793	804	0.99	1.00
	1	5368	855	868	1.07	1.08
	1.2	5006	893	911	1.12	1.14
	1.4	4638	934	962	1.17	1.20
	1.6	4160	992	997	1.24	1.25
	1.8	3810	1039	1029	1.30	1.29
T3	2	3510	1076	1060	1.34	1.33
	2.2	3192	1106	1099	1.38	1.37
	0.2	9468	859	811	1.95	1.84
	0.4	9181	894	850	2.03	1.93
	0.6	8911	930	878	2.11	1.99
	0.8	8724	966	925	2.19	2.10
	1	8554	992	980	2.25	2.22
	1.2	8298	1025	1027	2.33	2.33
	1.4	8015	1054	1082	2.39	2.45
	1.6	7718	1094	1128	2.48	2.56
T4	1.8	7441	1133	1158	2.57	2.63
	2	7210	1171	1189	2.66	2.70
	2.2	6884	1209	1218	2.74	2.76
	0.2	9881	909	854	2.24	2.11
	0.4	9602	941	890	2.32	2.20
	0.6	9353	976	915	2.41	2.26
	0.8	9179	1008	959	2.49	2.37
	1	9025	1032	1009	2.55	2.49
	1.2	8787	1063	1055	2.62	2.60
	1.4	8519	1090	1107	2.69	2.73
	1.6	8248	1127	1151	2.78	2.84
	1.8	7989	1163	1181	2.87	2.92
	2	7770	1199	1211	2.96	2.99
	2.2	7460	1237	1239	3.05	3.06

DFC2403W HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T5	0.2	10268	963	902	2.58	2.41
	0.4	9996	993	935	2.66	2.50
	0.6	9769	1025	957	2.74	2.56
	0.8	9604	1055	997	2.82	2.67
	1	9456	1077	1042	2.88	2.79
	1.2	9235	1106	1084	2.96	2.90
	1.4	8983	1132	1133	3.03	3.03
	1.6	8736	1164	1175	3.11	3.14
	1.8	8496	1197	1204	3.20	3.22
	2	8288	1232	1233	3.29	3.30
T6	2.2	8001	1267	1259	3.39	3.37
	0.2	9125	822	779	1.74	1.65
	0.4	8832	860	821	1.82	1.74
	0.6	8546	898	852	1.90	1.80
	0.8	8348	935	901	1.98	1.91
	1	8158	964	958	2.04	2.03
	1.2	7887	998	1007	2.11	2.13
	1.4	7592	1029	1063	2.18	2.25
	1.6	7272	1072	1109	2.27	2.35
	1.8	-	-	-	-	-
T7	2	-	-	-	-	-
	2.2	-	-	-	-	-
	0.2	9412	852	805	1.91	1.81
	0.4	9124	888	845	1.99	1.90
	0.6	8851	925	874	2.08	1.96
	0.8	8663	960	920	2.15	2.07
	1	8490	987	976	2.22	2.19
	1.2	8232	1020	1024	2.29	2.30
	1.4	7947	1050	1079	2.36	2.42
	1.6	7646	1090	1124	2.45	2.52
T8	1.8	7366	1129	1155	2.53	2.59
	2	7134	1168	1186	2.62	2.66
	2.2	-	-	-	-	-
	0.2	9695	885	834	2.10	1.98
	0.4	9412	919	871	2.19	2.07
	0.6	9153	954	897	2.27	2.13
	0.8	8974	988	942	2.35	2.24
	1	8814	1013	995	2.41	2.37
	1.2	8568	1045	1042	2.48	2.48
	1.4	8293	1073	1095	2.55	2.60
	1.6	8010	1111	1140	2.64	2.71
	1.8	7743	1148	1170	2.73	2.78
	2	7518	1186	1201	2.82	2.86
	2.2	7200	1223	1229	2.91	2.92

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

DFC2403W HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T9	0.2	9881	909	854	2.29	2.16
	0.4	9602	941	890	2.38	2.25
	0.6	9353	976	915	2.46	2.31
	0.8	9179	1008	959	2.55	2.42
	1	9025	1032	1009	2.61	2.55
	1.2	8787	1063	1055	2.68	2.66
	1.4	8519	1090	1107	2.75	2.79
	1.6	8248	1127	1151	2.85	2.91
	1.8	7989	1163	1181	2.94	2.98
	2	7770	1199	1211	3.03	3.06
T10	2.2	7460	1237	1239	3.12	3.13
	0.2	10268	963	902	2.58	2.05
	0.4	9996	993	935	2.66	2.12
	0.6	9769	1025	957	2.74	2.17
	0.8	9604	1055	997	2.82	2.26
	1	9456	1077	1042	2.88	2.37
	1.2	9235	1106	1084	2.96	2.46
	1.4	8983	1132	1133	3.03	2.57
	1.6	8736	1164	1175	3.11	2.67
	1.8	8496	1197	1204	3.20	2.73
	2	8288	1232	1233	3.29	2.80
	2.2	8001	1267	1259	3.39	2.86

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

DSC3003W HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1*	0.2	7629	701	674	1.07	1.03
	0.4	7314	746	725	1.14	1.11
	0.6	6969	789	777	1.21	1.19
	0.8	6701	833	829	1.28	1.27
	1	6380	882	892	1.35	1.37
	1.2	6049	919	939	1.41	1.44
	1.4	5706	956	994	1.46	1.52
	1.6	5285	1010	1035	1.55	1.58
	1.8	4952	1055	1066	1.62	1.63
	2	4673	1094	1098	1.68	1.68
T2*	2.2	4339	1128	1134	1.73	1.74
	0.2	7900	719	690	1.17	1.12
	0.4	7588	763	739	1.24	1.20
	0.6	7253	805	787	1.31	1.28
	0.8	6999	848	839	1.38	1.37
	1	6706	893	902	1.45	1.47
	1.2	6386	929	949	1.51	1.55
	1.4	6051	966	1005	1.57	1.64
	1.6	5649	1018	1048	1.66	1.71
	1.8	5322	1063	1079	1.73	1.76
T3	2	5050	1102	1111	1.79	1.81
	2.2	4712	1137	1146	1.85	1.87
	0.2	9468	859	811	1.95	1.84
	0.4	9181	894	850	2.03	1.93
	0.6	8911	930	878	2.11	1.99
	0.8	8724	966	925	2.19	2.10
	1	8554	992	980	2.25	2.22
	1.2	8298	1025	1027	2.33	2.33
	1.4	8015	1054	1082	2.39	2.45
	1.6	7718	1094	1128	2.48	2.56
T4	1.8	7441	1133	1158	2.57	2.63
	2	7210	1171	1189	2.66	2.70
	2.2	6884	1209	1218	2.74	2.76
	0.2	9881	909	854	2.24	2.11
	0.4	9602	941	890	2.32	2.20
	0.6	9353	976	915	2.41	2.26
	0.8	9179	1008	959	2.49	2.37
	1	9025	1032	1009	2.55	2.49
	1.2	8787	1063	1055	2.62	2.60
	1.4	8519	1090	1107	2.69	2.73
	1.6	8248	1127	1151	2.78	2.84
	1.8	7989	1163	1181	2.87	2.92
	2	7770	1199	1211	2.96	2.99
	2.2	7460	1237	1239	3.05	3.06

DSC3003W HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T5	0.2	10259	962	901	2.57	2.41
	0.4	9987	992	934	2.65	2.49
	0.6	9759	1024	956	2.73	2.55
	0.8	9594	1054	996	2.81	2.66
	1	9446	1075	1041	2.87	2.78
	1.2	9224	1105	1084	2.95	2.89
	1.4	8972	1131	1132	3.02	3.02
	1.6	8724	1163	1175	3.11	3.14
	1.8	8484	1196	1203	3.19	3.21
	2	8276	1231	1233	3.29	3.29
T6	2.2	7988	1267	1259	3.38	3.36
	0.2	10268	963	902	2.58	2.41
	0.4	9996	993	935	2.66	2.50
	0.6	9769	1025	957	2.74	2.56
	0.8	9604	1055	997	2.82	2.67
	1	9456	1077	1042	2.88	2.79
	1.2	9235	1106	1084	2.96	2.90
	1.4	8983	1132	1133	3.03	3.03
	1.6	8736	1164	1175	3.11	3.14
	1.8	8496	1197	1204	3.20	3.22
T7	2	8288	1232	1233	3.29	3.30
	2.2	8001	1267	1259	3.39	3.37
	0.2	10626	1022	955	2.95	2.75
	0.4	10361	1049	984	3.03	2.84
	0.6	10156	1080	1004	3.11	2.90
	0.8	9995	1107	1040	3.19	3.00
	1	9842	1127	1079	3.25	3.11
	1.2	9638	1155	1117	3.33	3.22
	1.4	9402	1179	1160	3.40	3.35
	1.6	9176	1207	1199	3.48	3.46
T8	1.8	8958	1236	1227	3.57	3.54
	2	8760	1269	1255	3.66	3.62
	2.2	8502	1302	1280	3.76	3.69
	0.2	10979	1092	1017	3.41	3.17
	0.4	10723	1116	1042	3.48	3.25
	0.6	10544	1144	1062	3.57	3.31
	0.8	10382	1168	1093	3.65	3.41
	1	10209	1190	1123	3.71	3.51
	1.2	10023	1216	1155	3.79	3.60
	1.4	9804	1237	1191	3.86	3.72
T8	1.6	9598	1261	1225	3.93	3.82
	1.8	9406	1285	1252	4.01	3.91
	2	9218	1314	1278	4.10	3.99
	2.2	9000	1344	1301	4.19	4.06

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

DSC3003W HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T9	0.2	11348	1185	1101	4.05	3.76
	0.4	11101	1206	1120	4.11	3.82
	0.6	10956	1230	1142	4.20	3.90
	0.8	10785	1250	1165	4.27	3.97
	1	10567	1275	1183	4.35	4.04
	1.2	10402	1298	1205	4.43	4.11
	1.4	10203	1317	1230	4.49	4.20
	1.6	10015	1335	1257	4.56	4.29
	1.8	9858	1353	1281	4.62	4.37
	2	9682	1376	1305	4.70	4.45
T10	2.2	9524	1400	1326	4.78	4.52
	0.2	11679	1301	1205	4.88	4.52
	0.4	11444	1317	1219	4.94	4.57
	0.6	11337	1338	1246	5.02	4.67
	0.8	11145	1353	1257	5.07	4.71
	1	10847	1386	1260	5.20	4.72
	1.2	10703	1405	1267	5.27	4.75
	1.4	10526	1421	1277	5.33	4.79
	1.6	10353	1432	1291	5.37	4.84
	1.8	10238	1441	1313	5.40	4.93
	2	10074	1457	1333	5.47	5.00
	2.2	10002	1473	1353	5.52	5.07

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

DSC1803D STANDARD STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1*	0.2	3198	422	434	0.19	0.20
	0.4	2752	503	498	0.23	0.22
	0.6	2055	609	564	0.27	0.25
	0.8	1372	674	648	0.30	0.29
	1	-	-	-	-	-
	1.2	-	-	-	-	-
T2*	0.2	4368	496	509	0.35	0.35
	0.4	3945	567	568	0.39	0.40
	0.6	3374	654	626	0.46	0.44
	0.8	3899	714	696	0.50	0.48
	1	2318	761	751	0.53	0.52
	1.2	1766	791	826	0.55	0.57
T3	0.2	5124	544	558	0.50	0.51
	0.4	4716	609	613	0.56	0.56
	0.6	4222	685	667	0.63	0.61
	0.8	3643	741	728	0.68	0.67
	1	3264	788	778	0.72	0.71
	1.2	2756	827	845	0.76	0.77
T4	0.2	7370	685	705	1.33	1.37
	0.4	7008	733	750	1.43	1.46
	0.6	6703	779	791	1.52	1.54
	0.8	6574	826	829	1.61	1.61
	1	6021	873	868	1.70	1.69
	1.2	5643	928	911	1.80	1.77
T5	0.2	7626	702	722	1.27	1.31
	0.4	7265	749	766	1.36	1.39
	0.6	6970	793	806	1.44	1.46
	0.8	4105	837	843	1.51	1.53
	1	6316	882	881	1.60	1.59
	1.2	5955	936	922	1.69	1.67
T6	0.2	7227	677	695	1.11	1.14
	0.4	6858	726	741	1.19	1.22
	0.6	6540	774	783	1.27	1.29
	0.8	6188	820	823	1.35	1.35
	1	-	-	-	-	-
	1.2	-	-	-	-	-
T7	0.2	7431	690	709	1.19	1.22
	0.4	7065	738	754	1.27	1.30
	0.6	6760	784	795	1.35	1.37
	0.8	6423	829	833	1.43	1.44
	1	6084	875	872	1.51	1.51
	1.2	-	-	-	-	-
T8	0.2	7669	705	724	1.29	1.32
	0.4	7308	751	769	1.37	1.41
	0.6	7016	795	809	1.45	1.48
	0.8	6696	839	846	1.53	1.55
	1	6366	884	883	1.62	1.61
	1.2	6007	938	923	1.71	1.69
T9	0.2	7783	712	732	1.34	1.38
	0.4	7424	758	776	1.42	1.46
	0.6	7138	800	815	1.50	1.53
	0.8	6826	843	851	1.59	1.60
	1	6501	888	888	1.67	1.67
	1.2	6149	942	928	1.77	1.74
T10	0.2	7885	719	739	1.38	1.42
	0.4	7527	764	782	1.47	1.51
	0.6	7247	805	821	1.55	1.58
	0.8	6941	848	857	1.63	1.65
	1	6620	892	893	1.72	1.72
	1.2	6275	946	932	1.82	1.79

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

DSC2403D STANDARD STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1*	0.2	4426	504	521	0.29	0.30
	0.4	4019	574	579	0.33	0.33
	0.6	3466	660	636	0.38	0.37
	0.8	2911	717	701	0.41	0.40
	1	2424	772	756	0.44	0.43
	1.2	1881	809	825	0.47	0.47
T2*	0.2	5830	591	608	0.62	0.64
	0.4	5453	649	659	0.68	0.69
	0.6	5056	711	707	0.75	0.74
	0.8	4597	771	757	0.81	0.80
	1	4141	832	803	0.88	0.85
	1.2	3702	867	861	0.91	0.91
T3	0.2	6929	659	677	0.98	1.00
	0.4	6571	709	724	1.05	1.07
	0.6	6269	756	765	1.12	1.13
	0.8	5883	815	806	1.21	1.19
	1	5461	876	845	1.30	1.25
	1.2	5096	910	895	1.35	1.32
T4	0.2	9133	798	821	2.08	2.14
	0.4	8793	837	860	2.19	2.25
	0.6	8538	871	895	2.28	2.34
	0.8	8286	912	929	2.38	2.43
	1	7991	947	960	2.48	2.51
	1.2	7739	984	992	2.57	2.59
T5	0.2	9371	813	837	2.26	2.33
	0.4	9030	852	875	2.37	2.43
	0.6	8756	888	912	2.47	2.53
	0.8	8516	924	946	2.57	2.63
	1	8245	953	977	2.65	2.71
	1.2	8000	990	1007	2.75	2.80
T6	0.2	7986	725	745	1.42	1.46
	0.4	7641	769	787	1.51	1.54
	0.6	7394	805	824	1.58	1.61
	0.8	7076	860	859	1.68	1.68
	1	-	-	-	-	-
	1.2	-	-	-	-	-
T7	0.2	8329	746	767	1.59	1.64
	0.4	7987	789	808	1.68	1.73
	0.6	7748	823	844	1.76	1.80
	0.8	7450	875	878	1.87	1.87
	1	7096	925	911	1.98	1.95
	1.2	-	-	-	-	-
T8	0.2	8663	768	789	1.78	1.83
	0.4	8323	808	829	1.88	1.92
	0.6	8083	842	865	1.95	2.01
	0.8	7806	890	898	2.06	2.08
	1	7473	935	930	2.17	2.16
	1.2	7204	970	966	2.25	2.24
T9	0.2	9133	798	821	2.08	2.14
	0.4	8793	837	860	2.19	2.25
	0.6	8538	871	895	2.28	2.34
	0.8	8286	912	929	2.38	2.43
	1	7991	947	960	2.48	2.51
	1.2	7739	984	992	2.57	2.59
T10	0.2	9371	813	837	2.26	2.33
	0.4	9030	852	875	2.37	2.43
	0.6	8756	888	912	2.47	2.53
	0.8	8516	924	946	2.57	2.63
	1	8245	953	977	2.65	2.71
	1.2	8000	990	1007	2.75	2.80

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

DSC3003D STANDARD STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1*	0.2	5835	605	594	0.57	0.56
	0.4	5496	659	654	0.63	0.62
	0.6	5095	706	736	0.67	0.70
	0.8	4723	757	785	0.72	0.75
	1	4182	836	848	0.79	0.81
	1.2	3784	874	884	0.83	0.84
T2*	0.2	7123	669	647	0.91	0.88
	0.4	6801	717	701	0.97	0.95
	0.6	6439	761	761	1.03	1.03
	0.8	6144	808	813	1.10	1.10
	1	5766	864	877	1.17	1.19
	1.2	5416	902	921	1.22	1.25
T3	0.2	8988	809	767	1.66	1.58
	0.4	8693	847	810	1.74	1.67
	0.6	8401	885	843	1.82	1.73
	0.8	8197	923	892	1.90	1.83
	1	7998	954	951	1.96	1.96
	1.2	7722	988	1000	2.03	2.06
T4	0.2	10778	1051	980	3.13	2.92
	0.4	10516	1077	1007	3.21	3.00
	0.6	10323	1106	1027	3.30	3.06
	0.8	10162	1132	1061	3.37	3.16
	1	10002	1152	1097	3.44	3.27
	1.2	9806	1179	1132	3.52	3.38
T5	0.2	10958	1088	1013	3.38	3.15
	0.4	10701	1112	1038	3.45	3.22
	0.6	10521	1140	1058	3.54	3.29
	0.8	10359	1164	1089	3.61	3.38
	1	10187	1186	1120	3.68	3.48
	1.2	10000	1211	1152	3.76	3.58
T6	0.2	9218	832	787	1.79	1.70
	0.4	8927	869	828	1.87	1.79
	0.6	-	-	-	-	-
	0.8	-	-	-	-	-
	1	-	-	-	-	-
	1.2	-	-	-	-	-
T7	0.2	9642	879	828	2.07	1.95
	0.4	9358	913	866	2.15	2.04
	0.6	9096	949	893	2.23	2.10
	0.8	8916	983	938	2.31	2.21
	1	8754	1008	991	2.37	2.33
	1.2	-	-	-	-	-
T8	0.2	9934	1083	971	2.68	2.40
	0.4	9735	1110	999	2.75	2.47
	0.6	9559	1138	1027	2.82	2.54
	0.8	9379	1162	1056	2.88	2.61
	1	9201	1187	1086	2.94	2.69
	1.2	9006	1212	1120	3.00	2.77
T9	0.2	10398	1123	1008	3.04	2.73
	0.4	10203	1149	1034	3.11	2.80
	0.6	10034	1176	1060	3.18	2.87
	0.8	9863	1199	1087	3.24	2.94
	1	9698	1222	1116	3.30	3.02
	1.2	9516	1245	1147	3.37	3.10
T10	0.2	10958	1088	1013	3.38	3.15
	0.4	10701	1112	1038	3.45	3.22
	0.6	10521	1140	1058	3.54	3.29
	0.8	10359	1164	1089	3.61	3.38
	1	10187	1186	1120	3.68	3.48
	1.2	10000	1211	1152	3.76	3.58

Shaded speed tap- Airflow for supplemental heat.

** (T1) and (T2) are part load only

MODELS: DSC1803D, DSC1804D, DSC1807D • STANDARD STATIC TO 3.5HP (0.2 ~1.2 ESP)															
CFM	0.2					0.4					0.6				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
3600	449	462	27	0.36	0.38	554	551	29	0.41	0.41	667	640	31	0.52	0.50
3900	468	480	28	0.36	0.37	568	568	30	0.43	0.43	674	652	32	0.54	0.52
4200	486	499	29	0.37	0.38	583	584	31	0.45	0.46	682	665	33	0.58	0.56
4500	505	518	30	0.39	0.40	598	601	32	0.49	0.50	691	678	34	0.63	0.61
4800	523	537	32	0.42	0.44	613	618	34	0.54	0.55	700	692	36	0.69	0.68
5100	542	556	33	0.47	0.48	628	635	35	0.60	0.61	710	706	38	0.76	0.75
5400	561	575	35	0.52	0.54	644	652	37	0.67	0.68	721	721	40	0.84	0.84
5700	579	595	37	0.59	0.60	660	670	39	0.76	0.77	733	736	42	0.93	0.94
6000	598	614	39	0.67	0.68	676	687	42	0.85	0.86	745	751	44	1.04	1.05
6300	617	634	41	0.76	0.77	693	705	44	0.96	0.97	758	767	47	1.15	1.17
6600	636	653	43	0.86	0.88	709	724	47	1.07	1.09	772	784	50	1.28	1.30
CFM	0.8					1					1.2				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
3600	758	745	36	0.76	0.75	798	784	34	0.74	0.71	861	855	37	0.90	0.87
3900	756	742	36	0.74	0.73	808	791	36	0.80	0.77	872	861	38	0.98	0.95
4200	756	741	36	0.74	0.72	817	800	37	0.87	0.84	883	868	40	1.06	1.03
4500	758	742	36	0.76	0.74	827	809	39	0.94	0.91	893	876	42	1.15	1.12
4800	761	745	37	0.79	0.77	836	819	41	1.03	1.00	904	884	44	1.25	1.22
5100	765	750	38	0.84	0.82	846	829	43	1.13	1.10	913	892	46	1.36	1.33
5400	772	758	39	0.91	0.89	856	840	45	1.23	1.21	923	902	49	1.48	1.44
5700	779	767	41	0.99	0.98	866	852	48	1.35	1.33	932	912	51	1.60	1.57
6000	789	778	43	1.10	1.09	875	865	50	1.47	1.46	941	922	54	1.73	1.71
6300	800	792	46	1.22	1.22	885	878	53	1.61	1.61	949	934	57	1.87	1.86
6600	812	807	48	1.36	1.36	895	892	56	1.75	1.76	957	946	60	2.02	2.01


MODELS: DSC2403D, DSC2404D, DSC2407D • STANDARD STATIC TO 3.5HP (0.2 ~1.2 ESP)															
CFM	0.2					0.4					0.6				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
4800	525	539	31	0.42	1.18	615	621	33	0.53	1.07	699	693	35	0.66	1.05
5200	550	566	33	0.48	1.17	635	644	35	0.61	1.07	712	712	37	0.75	1.05
5600	576	593	35	0.56	1.16	656	668	38	0.71	1.06	726	731	40	0.86	1.04
6000	601	620	38	0.65	1.15	678	691	40	0.82	1.05	742	752	43	1.00	1.03
6400	627	646	41	0.77	1.14	700	715	44	0.96	1.04	759	773	46	1.15	1.02
6800	652	672	44	0.91	1.13	722	739	47	1.12	1.03	778	794	50	1.32	1.01
7200	677	698	48	1.06	1.12	744	763	51	1.30	1.03	798	817	54	1.52	1.01
7600	702	724	52	1.24	1.11	767	788	55	1.49	1.02	819	840	59	1.73	1.00
8000	727	750	56	1.43	1.11	791	812	60	1.71	1.01	842	865	64	1.97	0.99
8400	752	775	61	1.65	1.10	814	836	65	1.95	1.00	867	890	69	2.22	0.99
8800	777	800	66	1.88	1.09	838	861	70	2.21	0.99	892	915	74	2.50	0.98
CFM	0.8					1					1.2				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
4800	777	761	37	0.84	0.92	860	820	40	1.05	0.75	908	884	43	1.22	0.71
5200	791	776	40	0.95	0.91	874	834	43	1.18	0.75	920	896	46	1.36	0.71
5600	806	792	43	1.08	0.91	888	849	46	1.32	0.74	932	908	49	1.51	0.70
6000	821	809	46	1.23	0.90	900	866	49	1.48	0.74	944	922	52	1.68	0.70
6400	836	828	50	1.39	0.89	911	883	53	1.65	0.74	954	937	56	1.87	0.70
6800	852	848	53	1.57	0.89	922	902	57	1.84	0.73	964	953	60	2.07	0.70
7200	868	869	58	1.78	0.88	931	921	61	2.04	0.73	973	971	64	2.28	0.69
7600	885	892	62	2.00	0.88	939	942	66	2.26	0.72	981	989	69	2.50	0.69
8000	902	915	67	2.23	0.87	947	964	71	2.49	0.72	989	1009	74	2.74	0.69
8400	919	940	72	2.49	0.87										
8800															

MODELS: DSC3003D, DSC3004D, DSC3007D • STANDARD STATIC TO 5HP (0.2 ~1.2 ESP)															
CFM	0.2					0.4					0.6				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
7000	648	629	25	0.76	0.75	715	699	28	0.93	0.91	781	767	31	1.13	1.11
7500	680	656	29	0.92	0.89	748	726	33	1.12	1.09	816	792	36	1.35	1.32
8000	719	689	35	1.13	1.09	788	760	38	1.37	1.32	857	823	42	1.62	1.56
8500	765	730	40	1.40	1.33	835	800	44	1.66	1.59	904	859	48	1.94	1.84
9000	819	777	47	1.72	1.63	889	847	51	2.01	1.91	957	902	54	2.29	2.17
9500	880	830	54	2.10	1.97	950	899	58	2.41	2.27	1015	952	61	2.70	2.53
10000	949	891	61	2.53	2.37	1018	958	65	2.86	2.68	1079	1007	68	3.14	2.93
10500	1025	958	69	3.01	2.81	1093	1023	73	3.36	3.14	1149	1069	76	3.63	3.38
11000	1109	1032	77	3.55	3.30	1175	1094	82	3.91	3.64	1225	1137	84	4.16	3.86
CFM	0.8					1					1.2				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
7000	840	831	34	1.30	1.29	894	908	36	1.48	1.50	947	972	39	1.69	1.73
7500	874	856	39	1.54	1.51	925	933	41	1.73	1.74	979	996	44	1.96	1.98
8000	914	886	44	1.82	1.77	963	961	47	2.03	2.01	1018	1024	50	2.27	2.26
8500	959	922	50	2.15	2.06	1007	993	53	2.37	2.31	1062	1053	56	2.62	2.57
9000	1010	963	57	2.52	2.39	1058	1029	59	2.75	2.65	1112	1086	62	3.01	2.91
9500	1067	1009	64	2.93	2.76	1115	1069	66	3.18	3.02	1168	1121	69	3.44	3.28
10000	1129	1061	71	3.38	3.17	1179	1113	74	3.65	3.43	1230	1159	77	3.91	3.68
10500	1197	1118	79	3.88	3.62	1250	1161	82	4.16	3.88	1298	1200	84	4.41	4.11
11000	1270	1181	87	4.42	4.11	1328	1213	90	4.71	4.36					

MODELS: DSC1803W, DSC1804W, DSC1807W • HIGH STATIC TO 5HP (0.8 ~2.2 ESP)																				
CFM	0.8					1					1.2					1.4				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
4200	689	688	17	1.72	0.41	761	770	20	1.89	0.54	836	838	22	1.77	0.60	994	948	27	2.26	0.81
4500	704	704	18	1.71	0.41	774	782	21	1.87	0.54	846	847	23	1.76	0.61	990	949	28	2.25	0.82
4800	720	719	19	1.70	0.41	787	793	22	1.86	0.55	857	857	24	1.74	0.63	987	951	29	2.23	0.84
5100	736	735	21	1.68	0.44	801	805	23	1.85	0.57	868	867	26	1.73	0.67	985	955	30	2.22	0.87
5400	752	751	22	1.67	0.47	814	818	25	1.83	0.61	879	878	27	1.72	0.72	985	959	31	2.21	0.92
5700	768	767	24	1.66	0.52	829	831	27	1.82	0.66	891	889	29	1.71	0.78	986	965	32	2.19	0.99
6000	785	783	26	1.65	0.58	843	844	28	1.81	0.72	903	901	31	1.70	0.86	989	971	34	2.18	1.07
6300	801	799	28	1.63	0.66	858	858	30	1.79	0.80	916	913	33	1.68	0.96	992	978	36	2.16	1.16
6600	818	816	30	1.62	0.75	873	872	32	1.78	0.90	929	926	35	1.67	1.06	998	986	38	2.15	1.27
CFM	1.6					1.8					2					2.2				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
4200	1025	1009	29	1.82	0.90	1070	1049	30	1.36	0.99	1114	1095	32	1.10	1.13	1164	1140	34	0.77	1.29
4500	1024	1009	30	1.81	0.93	1073	1051	31	1.35	1.04	1119	1098	34	1.10	1.20	1170	1145	36	0.77	1.39
4800	1025	1010	31	1.79	0.97	1076	1054	33	1.34	1.11	1124	1101	35	1.09	1.28	1177	1150	38	0.77	1.49
5100	1027	1013	32	1.78	1.02	1080	1058	34	1.34	1.18	1129	1106	37	1.09	1.37	1183	1155	40	0.77	1.60
5400	1029	1016	33	1.77	1.09	1085	1062	36	1.33	1.27	1135	1111	38	1.09	1.47	1190	1161	41	0.77	1.72
5700	1033	1020	35	1.76	1.17	1090	1067	38	1.32	1.37	1141	1116	40	1.08	1.59	1196	1167	43	0.77	1.85
6000	1037	1025	37	1.75	1.26	1096	1073	40	1.32	1.49	1147	1122	42	1.08	1.71	1203	1173	45	0.77	1.98
6300	1043	1031	39	1.74	1.37	1102	1080	42	1.31	1.61	1153	1129	44	1.07	1.84	1209	1180	48	0.77	2.13
6600	1049	1038	41	1.73	1.50	1109	1088	44	1.30	1.75	1160	1136	47	1.07	1.99	1216	1187	50	0.76	2.29

MODELS: DSC2403W, DSC2404W, DSC2407W • HIGH STATIC TO 5HP (0.8 ~2.2 ESP)																				
CFM	0.8					1					1.2					1.4				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
5600	775	789	22	0.86	0.88	842	861	24	0.99	1.04	889	918	27	1.14	1.21	938	985	30	1.31	1.41
6000	789	797	25	0.95	0.97	852	871	27	1.10	1.14	901	931	30	1.26	1.33	953	999	33	1.46	1.55
6400	807	808	28	1.07	1.08	866	884	31	1.23	1.27	916	946	33	1.42	1.48	970	1015	36	1.63	1.72
6800	828	822	32	1.22	1.21	883	900	34	1.39	1.42	936	963	37	1.59	1.64	991	1032	40	1.82	1.90
7200	853	840	36	1.39	1.37	906	918	38	1.57	1.59	959	981	41	1.79	1.83	1015	1050	44	2.04	2.10
7600	882	861	40	1.59	1.56	932	938	42	1.79	1.79	987	1002	45	2.02	2.03	1043	1069	49	2.28	2.31
8000	914	886	44	1.82	1.77	963	961	47	2.03	2.01	1018	1024	50	2.27	2.26	1074	1090	53	2.54	2.54
8400	950	914	49	2.08	2.00	998	986	52	2.30	2.25	1052	1047	55	2.55	2.50	1108	1111	58	2.82	2.79
8800	989	946	54	2.36	2.26	1037	1014	57	2.59	2.51										
CFM	1.6					1.8					2					2.2				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
5600	1008	1042	33	1.54	1.63	1066	1086	36	1.75	1.82	1116	1129	38	1.94	1.98	1165	1175	41	2.16	2.19
6000	1023	1058	36	1.71	1.79	1081	1101	39	1.93	1.98	1132	1143	41	2.12	2.16	1182	1189	45	2.35	2.38
6400	1040	1074	40	1.89	1.97	1099	1117	43	2.12	2.17	1149	1159	45	2.32	2.35	1199	1203	48	2.56	2.57
6800	1060	1091	44	2.09	2.16	1118	1134	47	2.33	2.36	1168	1175	49	2.54	2.55	1219	1217	52	2.78	2.78
7200	1083	1108	48	2.31	2.36	1139	1150	51	2.56	2.57	1189	1191	53	2.77	2.77	1239	1232	56	3.02	2.99
7600	1109	1127	52	2.56	2.58	1163	1168	55	2.80	2.80	1212	1208	58	3.02	3.00	1261	1247	61	3.28	3.22
8000	1137	1146	57	2.82	2.82	1189	1186	60	3.06	3.03	1237	1225	62	3.29	3.24	1285	1262	65	3.55	3.46
8400																				
8800																				

MODELS: DSC3003W, DSC3004W, DSC3007W • STANDARD STATIC TO 5HP (0.8 ~2.2 ESP)																				
CFM	0.8					1					1.2					1.4				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
7000	840	831	34	1.30	1.29	894	908	36	1.48	1.50	947	972	39	1.69	1.73	1003	1041	42	1.93	2.00
7500	874	856	39	1.54	1.51	925	933	41	1.73	1.74	979	996	44	1.96	1.98	1036	1064	48	2.21	2.26
8000	914	886	44	1.82	1.77	963	961	47	2.03	2.01	1018	1024	50	2.27	2.26	1074	1090	53	2.54	2.54
8500	959	922	50	2.15	2.06	1007	993	53	2.37	2.31	1062	1053	56	2.62	2.57	1117	1117	59	2.90	2.86
9000	1010	963	57	2.52	2.39	1058	1029	59	2.75	2.65	1112	1086	62	3.01	2.91	1165	1146	66	3.29	3.20
9500	1067	1009	64	2.93	2.76	1115	1069	66	3.18	3.02	1168	1121	69	3.44	3.28	1218	1177	73	3.72	3.57
10000	1129	1061	71	3.38	3.17	1179	1113	74	3.65	3.43	1230	1159	77	3.91	3.68	1276	1209	80	4.18	3.96
10500	1197	1118	79	3.88	3.62	1250	1161	82	4.16	3.88	1298	1200	84	4.41	4.11	1340	1244	88	4.68	4.38
11000	1270	1181	87	4.42	4.11	1328	1213	90	4.71	4.36	1371	1243	93	4.96	4.58	1408	1280	96	5.21	4.82
CFM	1.6					1.8					2					2.2				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
7000	1072	1099	46	2.20	2.26	1128	1142	49	2.44	2.47	1179	1183	51	2.65	2.66	1229	1225	54	2.90	2.88
7500	1102	1122	51	2.50	2.52	1157	1164	54	2.74	2.74	1206	1203	56	2.96	2.94	1256	1243	59	3.21	3.16
8000	1137	1146	57	2.82	2.82	1189	1186	60	3.06	3.03	1237	1225	62	3.29	3.24	1285	1262	65	3.55	3.46
8500	1175	1171	63	3.18	3.13	1224	1210	65	3.42	3.35	1270	1247	68	3.65	3.56	1316	1282	71	3.90	3.78
9000	1218	1197	69	3.56	3.47	1262	1234	72	3.80	3.68	1306	1270	74	4.03	3.90	1350	1302	77	4.28	4.11
9500	1265	1224	76	3.98	3.83	1303	1260	78	4.21	4.04	1344	1294	81	4.45	4.26	1386	1323	83	4.69	4.46
10000	1316	1252	83	4.43	4.21	1348	1286	85	4.64	4.42	1386	1318	87	4.88	4.63	1424	1343	89	5.11	4.83
10500																				
11000																				

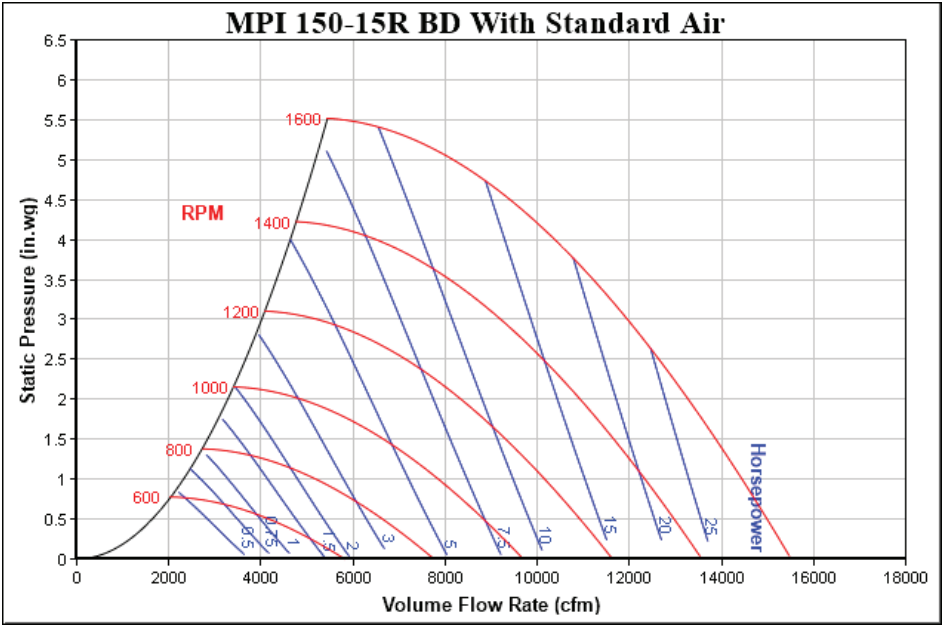

AIRFLOW PRESSURE DROP OF DOWNFLOW ECONOMIZER FOR 15 TO 25 TON ROOFTOP UNITS (100% RETURN AIR)												
SCFM	4500	5000	5500	6000	6500	7000	7500	8000	8500	9000	9500	10000
(In WG)	0.15	0.18	0.22	0.27	0.32	0.37	0.42	0.48	0.55	0.61	0.69	0.76

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC1803D	208/230/3/60	2	25.0	179	3	0.33	2.0	2	3.5	10.9	-	-	-	-	-	-	84.1/84.1	100/100
											-	-	-	-	4.8	-	88.9/88.9	110/110
											-	-	-	-	-	13.9	98.0/98.0	110/110
											-	-	-	9.6/8.7	-	-	93.7/92.8	110/110
											-	-	-	9.6/8.7	4.8	-	98.5/97.6	110/110
											-	-	-	9.6/8.7	-	13.9	108/107	125/125
											EH**-3L30	21.6/28.8	60.0/69.3	-	-	-	102/114	110/125
														-	4.8	-	108/120	110/125
														-	-	13.9	120/131	125/150
														9.6/8.7	-	-	114/125	125/125
														9.6/8.7	4.8	-	120/131	125/150
														9.6/8.7	-	13.9	132/142	150/150
											EH**-3L45	32.4/43.2	90.1/104	-	-	-	140/157	150/175
														-	4.8	-	146/163	150/175
														-	-	13.9	157/175	175/175
														9.6/8.7	-	-	152/168	175/175
														9.6/8.7	4.8	-	158/174	175/175
														9.6/8.7	-	13.9	169/185	175/200
											EH**-3L60	43.3/57.6	120/139	-	-	-	177/166	200/175
														-	4.8	-	183/172	200/175
														-	-	13.9	195/183	200/200
														9.6/8.7	-	-	189/177	200/200
														9.6/8.7	4.8	-	195/183	200/200
														9.6/8.7	-	13.9	207/194	225/200
DSC1803W	208/230/3/60	2	25.0	179	3	0.33	2.0	2	5.0	14.5	-	-	-	-	-	-	91.3/91.3	110/110
											-	-	-	-	4.8	-	96.1/96.1	110/110
											-	-	-	-	-	13.9	105/105	125/125
											-	-	-	9.6/8.7	-	-	101/100	125/125
											-	-	-	9.6/8.7	4.8	-	106/105	125/125
											-	-	-	9.6/8.7	-	13.9	115/114	125/125
											EH**-3L30	21.6/28.8	60.0/69.3	-	-	-	111/123	125/125
														-	4.8	-	117/129	125/150
														-	-	13.9	129/140	150/150
														9.6/8.7	-	-	123/134	125/150
														9.6/8.7	4.8	-	129/140	150/150
														9.6/8.7	-	13.9	141/151	150/175
											EH**-3L45	32.4/43.2	90.1/104	-	-	-	149/166	150/175
														-	4.8	-	155/172	175/175
														-	-	13.9	166/184	175/200
														9.6/8.7	-	-	161/177	175/200
														9.6/8.7	4.8	-	167/183	175/200
														9.6/8.7	-	13.9	178/194	200/200
											EH**-3L60	43.3/57.6	120/139	-	-	-	186/175	200/175
														-	4.8	-	192/181	200/200
														-	-	13.9	204/192	225/200
														9.6/8.7	-	-	198/186	200/200
														9.6/8.7	4.8	-	204/192	225/200
														9.6/8.7	-	13.9	216/203	225/225

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC1804D	460/3/60	2	10.9	103	3	0.33	0.85	2	3.5	7.2	-	-	-	-	-	-	41.4	50
											-	-	-	-	2.4	-	43.8	50
											-	-	-	-	-	8.1	49.5	60
											-	-	-	4.3	-	-	45.7	50
											-	-	-	4.3	2.4	-	48.1	50
											-	-	-	4.3	-	8.1	53.8	60
											EH**-4L30	28.8	34.6	-	-	-	61.3	70
														-	2.4	-	64.3	70
														-	-	8.1	71.4	80
														4.3	-	-	66.7	70
														4.3	2.4	-	69.7	70
														4.3	-	8.1	76.8	80
											EH**-4L45	43.2	52.0	-	-	-	83.0	90
														-	2.4	-	86.0	90
														-	-	8.1	93.1	100
														4.3	-	-	88.3	90
														4.3	2.4	-	91.3	100
														4.3	-	8.1	98.5	100
											EH**-4L60	57.6	69.3	-	-	-	87.3	90
														-	2.4	-	90.3	100
														-	-	8.1	97.4	100
														4.3	-	-	92.7	100
														4.3	2.4	-	95.7	100
														4.3	-	8.1	103	110
DSC1804W	460/3/60	2	10.9	103	3	0.33	0.85	2	5.0	10.6	-	-	-	-	-	-	48.2	50
											-	-	-	-	2.4	-	50.6	60
											-	-	-	-	-	8.1	56.3	60
											-	-	-	4.3	-	-	52.5	60
											-	-	-	4.3	2.4	-	54.9	60
											-	-	-	4.3	-	8.1	60.6	70
											EH**-4L30	28.8	34.6	-	-	-	69.8	70
														-	2.4	-	72.8	80
														-	-	8.1	79.9	80
														4.3	-	-	75.2	80
														4.3	2.4	-	78.2	80
														4.3	-	8.1	85.3	90
											EH**-4L45	43.2	52.0	-	-	-	91.5	100
														-	2.4	-	94.5	100
														-	-	8.1	102	110
														4.3	-	-	96.8	100
														4.3	2.4	-	99.8	100
														4.3	-	8.1	107	110
											EH**-4L60	57.6	69.3	-	-	-	95.8	100
														-	2.4	-	98.8	100
														-	-	8.1	106	110
														4.3	-	-	101	110
														4.3	2.4	-	104	110
														4.3	-	8.1	111	125

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC1807D	575/3/60	2	8.4	78.0	3	0.33	0.67	2	3.5	5.0	-	-	-	-	-	-	31.0	35
											-	-	-	-	2.0	-	33.0	40
											-	-	-	-	-	8.3	39.3	45
											-	-	-	3.5	-	-	34.5	40
											-	-	-	3.5	2.0	-	36.5	40
											-	-	-	3.5	-	8.3	42.8	50
											EH**-7L30	28.8	27.7	-	-	-	47.1	50
														-	2.0	-	49.6	50
														-	-	8.3	57.5	60
														3.5	-	-	51.5	60
														3.5	2.0	-	54.0	60
														3.5	-	8.3	61.9	70
											EH**-7L45	43.2	41.6	-	-	-	64.5	70
														-	2.0	-	67.0	70
														-	-	8.3	74.8	80
														3.5	-	-	68.8	70
														3.5	2.0	-	71.3	80
														3.5	-	8.3	79.2	80
											EH**-7L60	57.6	55.4	-	-	-	67.9	70
														-	2.0	-	70.4	80
														-	-	8.3	78.3	80
														3.5	-	-	72.3	80
														3.5	2.0	-	74.8	80
														3.5	-	8.3	82.7	90
DSC1807W	575/3/60	2	8.4	78.0	3	0.33	0.67	2	5.0	7.2	-	-	-	-	-	-	35.4	40
											-	-	-	-	2.0	-	37.4	45
											-	-	-	-	-	8.3	43.7	50
											-	-	-	3.5	-	-	38.9	45
											-	-	-	3.5	2.0	-	40.9	45
											-	-	-	3.5	-	8.3	47.2	50
											EH**-7L30	28.8	27.7	-	-	-	52.6	60
														-	2.0	-	55.1	60
														-	-	8.3	63.0	70
														3.5	-	-	57.0	60
														3.5	2.0	-	59.5	60
														3.5	-	8.3	67.4	70
											EH**-7L45	43.2	41.6	-	-	-	70.0	70
														-	2.0	-	72.5	80
														-	-	8.3	80.3	90
														3.5	-	-	74.3	80
														3.5	2.0	-	76.8	80
														3.5	-	8.3	84.7	90
											EH**-7L60	57.6	55.4	-	-	-	73.4	80
														-	2.0	-	75.9	80
														-	-	8.3	83.8	90
														3.5	-	-	77.8	80
														3.5	2.0	-	80.3	90
														3.5	-	8.3	88.2	90

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC2403D	208/230/3/60	2	29.4	225	4	0.5	2.7	2	3.5	10.9	-	-	-	-	-	-	98.7/98.7	125/125
											-	-	-	-	4.8	-	103/103	125/125
											-	-	-	-	-	13.9	113/113	125/125
											-	-	-	9.6/8.7	-	-	108/107	125/125
											-	-	-	9.6/8.7	4.8	-	113/112	125/125
											-	-	-	9.6/8.7	-	13.9	122/121	150/150
											EH**-3L30	21.6/28.8	60.0/69.3	-	-	-	102/114	125/125
														-	4.8	-	108/120	125/125
														-	-	13.9	120/131	125/150
														9.6/8.7	-	-	114/125	125/125
														9.6/8.7	4.8	-	120/131	125/150
														9.6/8.7	-	13.9	132/142	150/150
											EH**-3L45	32.4/43.2	90.1/104	-	-	-	140/157	150/175
														-	4.8	-	146/163	150/175
														-	-	13.9	157/175	175/175
														9.6/8.7	-	-	152/168	175/175
														9.6/8.7	4.8	-	158/174	175/175
														9.6/8.7	-	13.9	169/185	175/200
											EH**-3L60	43.3/57.6	120/139	-	-	-	177/166	200/175
														-	4.8	-	183/172	200/175
														-	-	13.9	195/183	200/200
														9.6/8.7	-	-	189/177	200/200
														9.6/8.7	4.8	-	195/183	200/200
														9.6/8.7	-	13.9	207/194	225/200
											EH**-3L75	54.1/72.0	150/173	-	-	-	177/200	200/225
														-	4.8	-	183/206	200/225
														-	-	13.9	195/218	200/225
														9.6/8.7	-	-	189/211	200/225
														9.6/8.7	4.8	-	195/217	200/225
														9.6/8.7	-	13.9	207/229	225/250
DSC2403W	208/230/3/60	2	29.4	225	4	0.5	2.7	2	5.0	14.5	-	-	-	-	-	-	106/106	125/125
											-	-	-	-	4.8	-	111/111	125/125
											-	-	-	-	-	13.9	120/120	125/125
											-	-	-	9.6/8.7	-	-	115/115	125/125
											-	-	-	9.6/8.7	4.8	-	120/119	125/125
											-	-	-	9.6/8.7	-	13.9	129/128	150/150
											EH**-3L30	21.6/28.8	60.0/69.3	-	-	-	111/123	125/125
														-	4.8	-	117/129	125/150
														-	-	13.9	129/140	150/150
														9.6/8.7	-	-	123/134	125/150
														9.6/8.7	4.8	-	129/140	150/150
														9.6/8.7	-	13.9	141/151	150/175
											EH**-3L45	32.4/43.2	90.1/104	-	-	-	149/166	150/175
														-	4.8	-	155/172	175/175
														-	-	13.9	166/184	175/200
														9.6/8.7	-	-	161/177	175/200
														9.6/8.7	4.8	-	167/183	175/200
														9.6/8.7	-	13.9	178/194	200/200
											EH**-3L60	43.3/57.6	120/139	-	-	-	186/175	200/175
														-	4.8	-	192/181	200/200
														-	-	13.9	204/192	225/200
														9.6/8.7	-	-	198/186	200/200
														9.6/8.7	4.8	-	204/192	225/200
														9.6/8.7	-	13.9	216/203	225/225
											EH**-3L75	54.1/72.0	150/173	-	-	-	186/209	200/225
														-	4.8	-	192/215	200/225
														-	-	13.9	204/227	225/250
														9.6/8.7	-	-	198/220	200/225
														9.6/8.7	4.8	-	204/226	225/250
														9.6/8.7	-	13.9	216/238	225/250

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC2404D	460/3/60	2	13.7	130	4	0.5	1.4	2	3.5	7.2	-	-	-	-	-	-	50.8	60
											-	-	-	-	2.4	-	53.2	60
											-	-	-	-	-	8.1	58.9	70
											-	-	-	4.3	-	-	55.1	60
											-	-	-	4.3	2.4	-	57.5	70
											-	-	-	4.3	-	8.1	63.2	70
											EH**-4L30	28.8	34.6	-	-	-	61.3	70
														-	2.4	-	64.3	70
														-	-	8.1	71.4	80
														4.3	-	-	66.7	70
														4.3	2.4	-	69.7	70
														4.3	-	8.1	76.8	80
											EH**-4L45	43.2	52.0	-	-	-	83.0	90
														-	2.4	-	86.0	90
														-	-	8.1	93.1	100
														4.3	-	-	88.3	90
														4.3	2.4	-	91.3	100
														4.3	-	8.1	98.5	100
											EH**-4L60	57.6	69.3	-	-	-	87.3	90
														-	2.4	-	90.3	100
														-	-	8.1	97.4	100
														4.3	-	-	92.7	100
														4.3	2.4	-	95.7	100
														4.3	-	8.1	103	110
											EH**-4L75	72.0	86.6	-	-	-	105	110
														-	2.4	-	108	110
														-	-	8.1	115	125
														4.3	-	-	110	110
														4.3	2.4	-	113	125
														4.3	-	8.1	120	125
DSC2404W	460/3/60	2	13.7	130	4	0.5	1.4	2	5.0	10.6	-	-	-	-	-	-	57.6	70
											-	-	-	-	2.4	-	60.0	70
											-	-	-	-	-	8.1	65.7	70
											-	-	-	4.3	-	-	61.9	70
											-	-	-	4.3	2.4	-	64.3	70
											-	-	-	4.3	-	8.1	70.0	80
											EH**-4L30	28.8	34.6	-	-	-	69.8	70
														-	2.4	-	72.8	80
														-	-	8.1	79.9	80
														4.3	-	-	75.2	80
														4.3	2.4	-	78.2	80
														4.3	-	8.1	85.3	90
											EH**-4L45	43.2	52.0	-	-	-	91.5	100
														-	2.4	-	94.5	100
														-	-	8.1	102	110
														4.3	-	-	96.8	100
														4.3	2.4	-	99.8	100
														4.3	-	8.1	107	110
											EH**-4L60	57.6	69.3	-	-	-	95.8	100
														-	2.4	-	98.8	100
														-	-	8.1	106	110
														4.3	-	-	101	110
														4.3	2.4	-	104	110
														4.3	-	8.1	111	125
											EH**-4L75	72.0	86.6	-	-	-	113	125
														-	2.4	-	116	125
														-	-	8.1	123	125
														4.3	-	-	118	125
														4.3	2.4	-	121	125
														4.3	-	8.1	129	150

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC2407D	575/3/60	2	10.9	93.7	4	0.5	1.0	2	3.5	5.0	-	-	-	-	-	-	38.5	45
											-	-	-	-	2.0	-	40.5	50
											-	-	-	-	-	8.3	46.8	50
											-	-	-	3.5	-	-	42.0	50
											-	-	-	3.5	2.0	-	44.0	50
											-	-	-	3.5	-	8.3	50.3	60
											EH**-7L30	28.8	27.7	-	-	-	47.1	50
														-	2.0	-	49.6	50
														-	-	8.3	57.5	60
														3.5	-	-	51.5	60
														3.5	2.0	-	54.0	60
														3.5	-	8.3	61.9	70
											EH**-7L45	43.2	41.6	-	-	-	64.5	70
														-	2.0	-	67.0	70
														-	-	8.3	74.8	80
														3.5	-	-	68.8	70
														3.5	2.0	-	71.3	80
														3.5	-	8.3	79.2	80
											EH**-7L60	57.6	55.4	-	-	-	67.9	70
														-	2.0	-	70.4	80
														-	-	8.3	78.3	80
														3.5	-	-	72.3	80
														3.5	2.0	-	74.8	80
														3.5	-	8.3	82.7	90
											EH**-7L75	72.0	69.3	-	-	-	81.8	90
														-	2.0	-	84.3	90
														-	-	8.3	92.2	100
														3.5	-	-	86.2	90
														3.5	2.0	-	88.7	90
														3.5	-	8.3	96.5	100
DSC2407W	575/3/60	2	10.9	93.7	4	0.5	1.0	2	5.0	7.2	-	-	-	-	-	-	42.9	50
											-	-	-	-	2.0	-	44.9	50
											-	-	-	-	-	8.3	51.2	60
											-	-	-	3.5	-	-	46.4	50
											-	-	-	3.5	2.0	-	48.4	50
											-	-	-	3.5	-	8.3	54.7	60
											EH**-7L30	28.8	27.7	-	-	-	52.6	60
														-	2.0	-	55.1	60
														-	-	8.3	63.0	70
														3.5	-	-	57.0	60
														3.5	2.0	-	59.5	60
														3.5	-	8.3	67.4	70
											EH**-7L45	43.2	41.6	-	-	-	70.0	70
														-	2.0	-	72.5	80
														-	-	8.3	80.3	90
														3.5	-	-	74.3	80
														3.5	2.0	-	76.8	80
														3.5	-	8.3	84.7	90
											EH**-7L60	57.6	55.4	-	-	-	73.4	80
														-	2.0	-	75.9	80
														-	-	8.3	83.8	90
														3.5	-	-	77.8	80
														3.5	2.0	-	80.3	90
														3.5	-	8.3	88.2	90
											EH**-7L75	72.0	69.3	-	-	-	87.3	90
														-	2.0	-	89.8	90
														-	-	8.3	97.7	100
														3.5	-	-	91.7	100
														3.5	2.0	-	94.2	100
														3.5	-	8.3	102	110

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC3003D	208/230/3/60	2	35.3	270	5	0.5	2.7	2	5.0	14.5	-	-	-	-	-	-	122/122	150/150
											-	-	-	-	4.8	-	127/127	150/150
											-	-	-	-	-	13.9	136/136	150/150
											-	-	-	9.6/8.7	-	-	131/131	150/150
											-	-	-	9.6/8.7	4.8	-	136/135	150/150
											-	-	-	9.6/8.7	-	13.9	145/144	175/175
											EH**-3L30	21.6/28.8	60.0/69.3	-	-	-	122/123	150/150
														-	4.8	-	127/129	150/150
														-	-	13.9	136/140	150/150
														9.6/8.7	-	-	131/134	150/150
														9.6/8.7	4.8	-	136/140	150/150
														9.6/8.7	-	13.9	145/151	175/175
											EH**-3L45	32.4/43.2	90.1/104	-	-	-	149/166	150/175
														-	4.8	-	155/172	175/175
														-	-	13.9	166/184	175/200
														9.6/8.7	-	-	161/177	175/200
														9.6/8.7	4.8	-	167/183	175/200
														9.6/8.7	-	13.9	178/194	200/200
											EH**-3L60	43.3/57.6	120/139	-	-	-	186/175	200/175
														-	4.8	-	192/181	200/200
														-	-	13.9	204/192	225/200
														9.6/8.7	-	-	198/186	200/200
														9.6/8.7	4.8	-	204/192	225/200
														9.6/8.7	-	13.9	216/203	225/225
											EH**-3L75	54.1/72.0	150/173	-	-	-	186/209	200/225
														-	4.8	-	192/215	200/225
														-	-	13.9	204/227	225/250
														9.6/8.7	-	-	198/220	200/225
														9.6/8.7	4.8	-	204/226	225/250
														9.6/8.7	-	13.9	216/238	225/250
DSC3003W	208/230/3/60	2	35.3	270	5	0.5	2.7	2	5.0	14.5	-	-	-	-	-	-	122/122	150/150
											-	-	-	-	4.8	-	127/127	150/150
											-	-	-	-	-	13.9	136/136	150/150
											-	-	-	9.6/8.7	-	-	131/131	150/150
											-	-	-	9.6/8.7	4.8	-	136/135	150/150
											-	-	-	9.6/8.7	-	13.9	145/144	175/175
											EH**-3L30	21.6/28.8	60.0/69.3	-	-	-	122/123	150/150
														-	4.8	-	127/129	150/150
														-	-	13.9	136/140	150/150
														9.6/8.7	-	-	131/134	150/150
														9.6/8.7	4.8	-	136/140	150/150
														9.6/8.7	-	13.9	145/151	175/175
											EH**-3L45	32.4/43.2	90.1/104	-	-	-	149/166	150/175
														-	4.8	-	155/172	175/175
														-	-	13.9	166/184	175/200
														9.6/8.7	-	-	161/177	175/200
														9.6/8.7	4.8	-	167/183	175/200
														9.6/8.7	-	13.9	178/194	200/200
											EH**-3L60	43.3/57.6	120/139	-	-	-	186/175	200/175
														-	4.8	-	192/181	200/200
														-	-	13.9	204/192	225/200
														9.6/8.7	-	-	198/186	200/200
														9.6/8.7	4.8	-	204/192	225/200
														9.6/8.7	-	13.9	216/203	225/225
											EH**-3L75	54.1/72.0	150/173	-	-	-	186/209	200/225
														-	4.8	-	192/215	200/225
														-	-	13.9	204/227	225/250
														9.6/8.7	-	-	198/220	200/225
														9.6/8.7	4.8	-	204/226	225/250
														9.6/8.7	-	13.9	216/238	225/250


MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC3004D	460/3/60	2	20.5	147	5	0.5	1.4	2	5.0	10.6	-	-	-	-	-	-	74.3	90
											-	-	-	-	2.4	-	76.7	90
											-	-	-	-	-	8.1	82.4	100
											-	-	-	4.3	-	-	78.6	90
											-	-	-	4.3	2.4	-	81.0	100
											-	-	-	4.3	-	8.1	86.7	100
											EH**-4L30	28.8	34.6	-	-	-	74.3	90
														-	2.4	-	76.7	90
														-	-	8.1	82.4	100
														4.3	-	-	78.6	90
														4.3	2.4	-	81.0	100
														4.3	-	8.1	86.7	100
											EH**-4L45	43.2	52.0	-	-	-	91.5	100
														-	2.4	-	94.5	100
														-	-	8.1	102	110
														4.3	-	-	96.8	100
														4.3	2.4	-	99.8	100
														4.3	-	8.1	107	110
											EH**-4L60	57.6	69.3	-	-	-	95.8	100
														-	2.4	-	98.8	100
														-	-	8.1	106	110
														4.3	-	-	101	110
														4.3	2.4	-	104	110
														4.3	-	8.1	111	125
											EH**-4L75	72.0	86.6	-	-	-	113	125
														-	2.4	-	116	125
														-	-	8.1	123	125
														4.3	-	-	118	125
														4.3	2.4	-	121	125
														4.3	-	8.1	129	150
DSC3004W	460/3/60	2	20.5	147	5	0.5	1.4	2	5.0	10.6	-	-	-	-	-	-	74.3	90
											-	-	-	-	2.4	-	76.7	90
											-	-	-	-	-	8.1	82.4	100
											-	-	-	4.3	-	-	78.6	90
											-	-	-	4.3	2.4	-	81.0	100
											-	-	-	4.3	-	8.1	86.7	100
											EH**-4L30	28.8	34.6	-	-	-	74.3	90
														-	2.4	-	76.7	90
														-	-	8.1	82.4	100
														4.3	-	-	78.6	90
														4.3	2.4	-	81.0	100
														4.3	-	8.1	86.7	100
											EH**-4L45	43.2	52.0	-	-	-	91.5	100
														-	2.4	-	94.5	100
														-	-	8.1	102	110
														4.3	-	-	96.8	100
														4.3	2.4	-	99.8	100
														4.3	-	8.1	107	110
											EH**-4L60	57.6	69.3	-	-	-	95.8	100
														-	2.4	-	98.8	100
														-	-	8.1	106	110
														4.3	-	-	101	110
														4.3	2.4	-	104	110
														4.3	-	8.1	111	125
											EH**-4L75	72.0	86.6	-	-	-	113	125
														-	2.4	-	116	125
														-	-	8.1	123	125
														4.3	-	-	118	125
														4.3	2.4	-	121	125
														4.3	-	8.1	129	150

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			OPTIONAL POWERED CONVENIENCE OUTLET	OPTIONAL POWER EXHAUST	OPTIONAL POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSC3007D	575/3/60	2	13.8	109	5	0.5	1.0	2	5.0	7.2	-	-	-	-	-	-	50.4	60
											-	-	-	-	2.0	-	52.4	60
											-	-	-	-	-	8.3	58.7	70
											-	-	-	3.5	-	-	53.9	60
											-	-	-	3.5	2.0	-	55.9	60
											-	-	-	3.5	-	8.3	62.2	70
											EH**-7L30	28.8	27.7	-	-	-	52.6	60
														-	2.0	-	55.1	60
														-	-	8.3	63.0	70
														3.5	-	-	57.0	60
														3.5	2.0	-	59.5	60
														3.5	-	8.3	67.4	70
											EH**-7L45	43.2	41.6	-	-	-	70.0	70
														-	2.0	-	72.5	80
														-	-	8.3	80.3	90
														3.5	-	-	74.3	80
														3.5	2.0	-	76.8	80
														3.5	-	8.3	84.7	90
											EH**-7L60	57.6	55.4	-	-	-	73.4	80
														-	2.0	-	75.9	80
														-	-	8.3	83.8	90
														3.5	-	-	77.8	80
														3.5	2.0	-	80.3	90
														3.5	-	8.3	88.2	90
											EH**-7L75	72.0	69.3	-	-	-	87.3	90
														-	2.0	-	89.8	90
														-	-	8.3	97.7	100
														3.5	-	-	91.7	100
														3.5	2.0	-	94.2	100
														3.5	-	8.3	102	110
DSC3007W	575/3/60	2	13.8	109	5	0.5	1.0	2	5.0	7.2	-	-	-	-	-	-	50.4	60
											-	-	-	-	2.0	-	52.4	60
											-	-	-	-	-	8.3	58.7	70
											-	-	-	3.5	-	-	53.9	60
											-	-	-	3.5	2.0	-	55.9	60
											-	-	-	3.5	-	8.3	62.2	70
											EH**-7L30	28.8	27.7	-	-	-	52.6	60
														-	2.0	-	55.1	60
														-	-	8.3	63.0	70
														3.5	-	-	57.0	60
														3.5	2.0	-	59.5	60
														3.5	-	8.3	67.4	70
											EH**-7L45	43.2	41.6	-	-	-	70.0	70
														-	2.0	-	72.5	80
														-	-	8.3	80.3	90
														3.5	-	-	74.3	80
														3.5	2.0	-	76.8	80
														3.5	-	8.3	84.7	90
											EH**-7L60	57.6	55.4	-	-	-	73.4	80
														-	2.0	-	75.9	80
														-	-	8.3	83.8	90
														3.5	-	-	77.8	80
														3.5	2.0	-	80.3	90
														3.5	-	8.3	88.2	90
											EH**-7L75	72.0	69.3	-	-	-	87.3	90
														-	2.0	-	89.8	90
														-	-	8.3	97.7	100
														3.5	-	-	91.7	100
														3.5	2.0	-	94.2	100
														3.5	-	8.3	102	110

AIR FLOW FOR ELECTRIC HEAT				
UNIT	HEATER KIT MODEL NUMBER	kW	MINIMUM CFM	MAXIMUM CFM
15 ton AC STD Static	EH*-L30	30	6000	8000
	EH*-L45	45		
	EH*-L60	60		
15 ton AC High Static	EH*-L30	30	5250	9500
	EH*-L45	45		
	EH*-L60	60		
20 ton AC STD Static	EH*-L30	30	7000	9400
	EH*-L45	45		
	EH*-L60	60		
	EH*-L75	75		
20 ton AC High Static	EH*-L30	30	7000	10300
	EH*-L45	45		
	EH*-L60	60		
	EH*-L75	75		
25 ton AC STD Static	EH*-L30	30	8750	11000
	EH*-L45	45		
	EH*-L60	60		
	EH*-L75	75		
25 ton AC High Static	EH*-L30	30	7500	11700
	EH*-L45	45		
	EH*-L60	60		
	EH*-L75	75		

HEATER KIT MODEL NUMBER NOMENCLATURE

	E	H	X	-	3	L	30
	1	2	3	-	4	5	6,7
Electric							
Heater							
Heater Type							
X							
S							
Voltage							
3							
4							
7							
Chassis							
L							
Kilowatt							
30							
45							
60							
75							

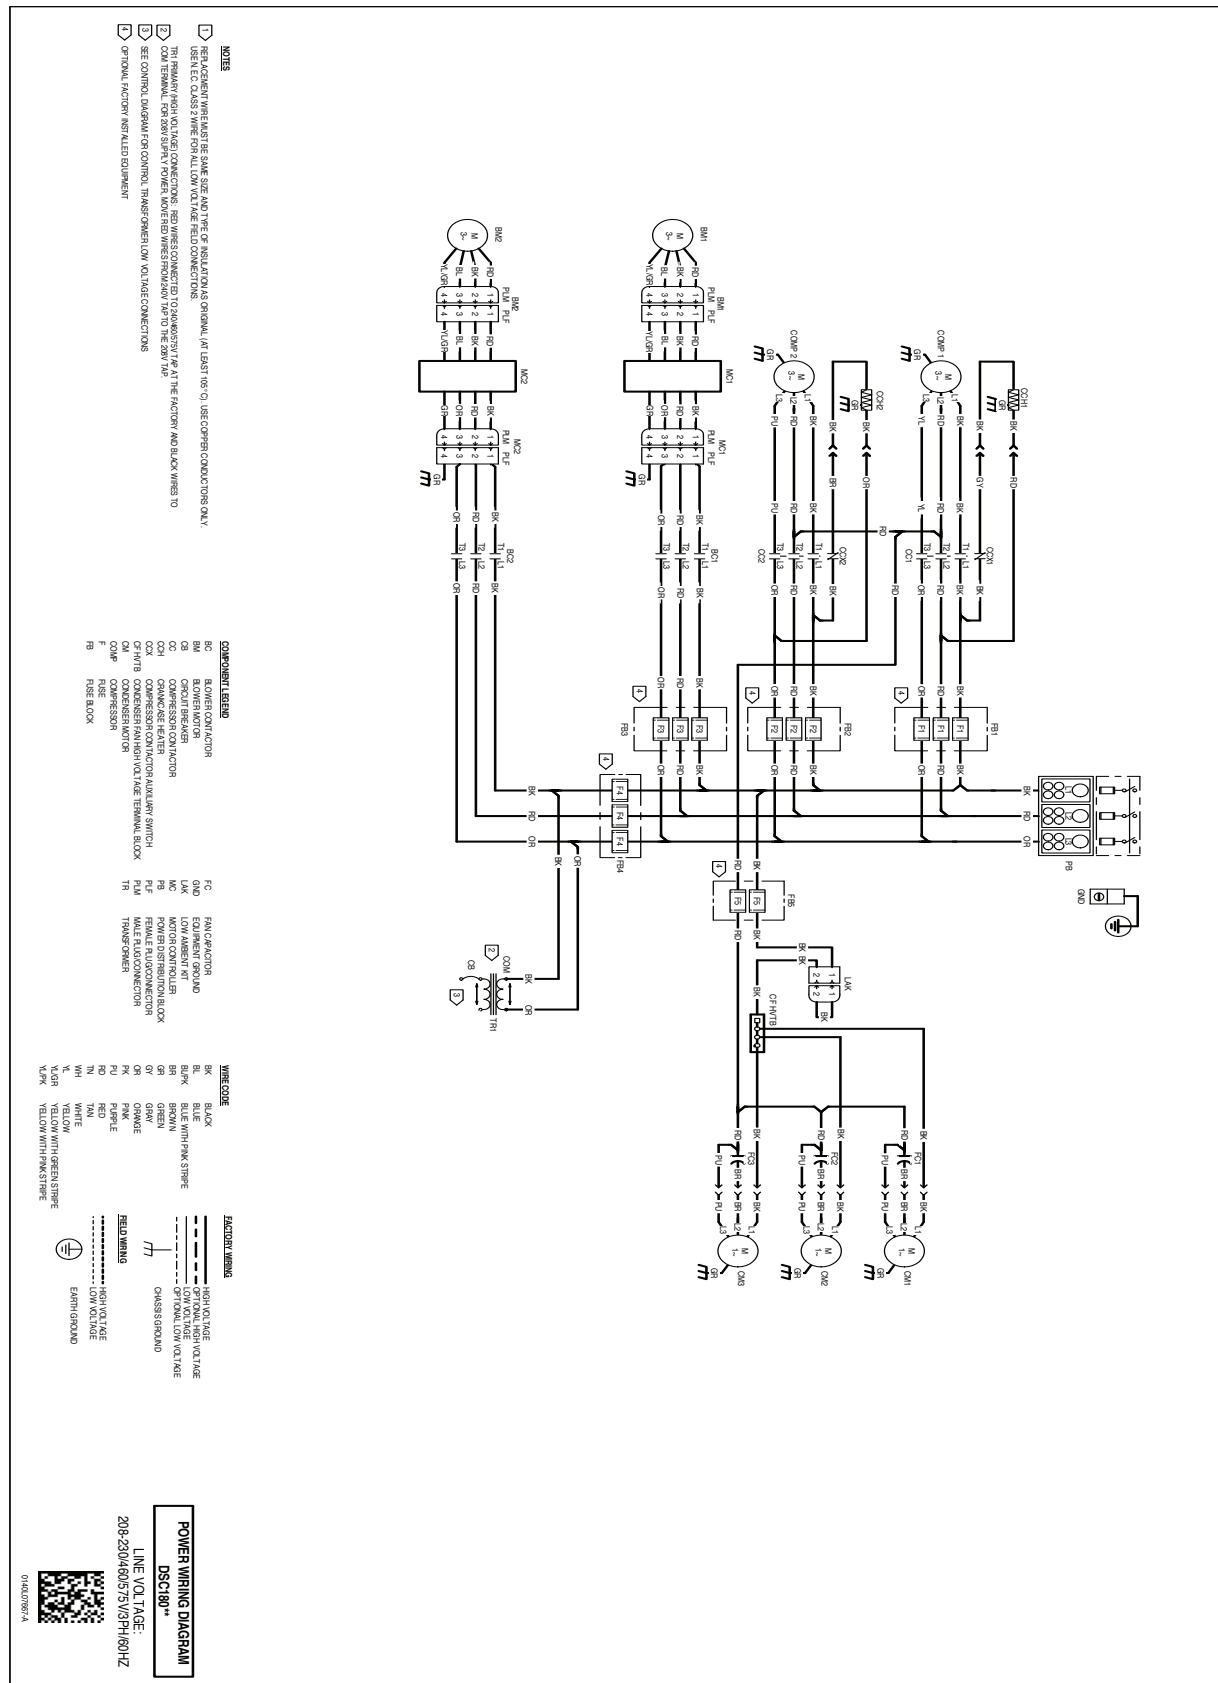

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.




POWER WIRING DIAGRAM

DSC240**

LINE VOLTAGE:

208-230/460/575V/3PH/60HZ

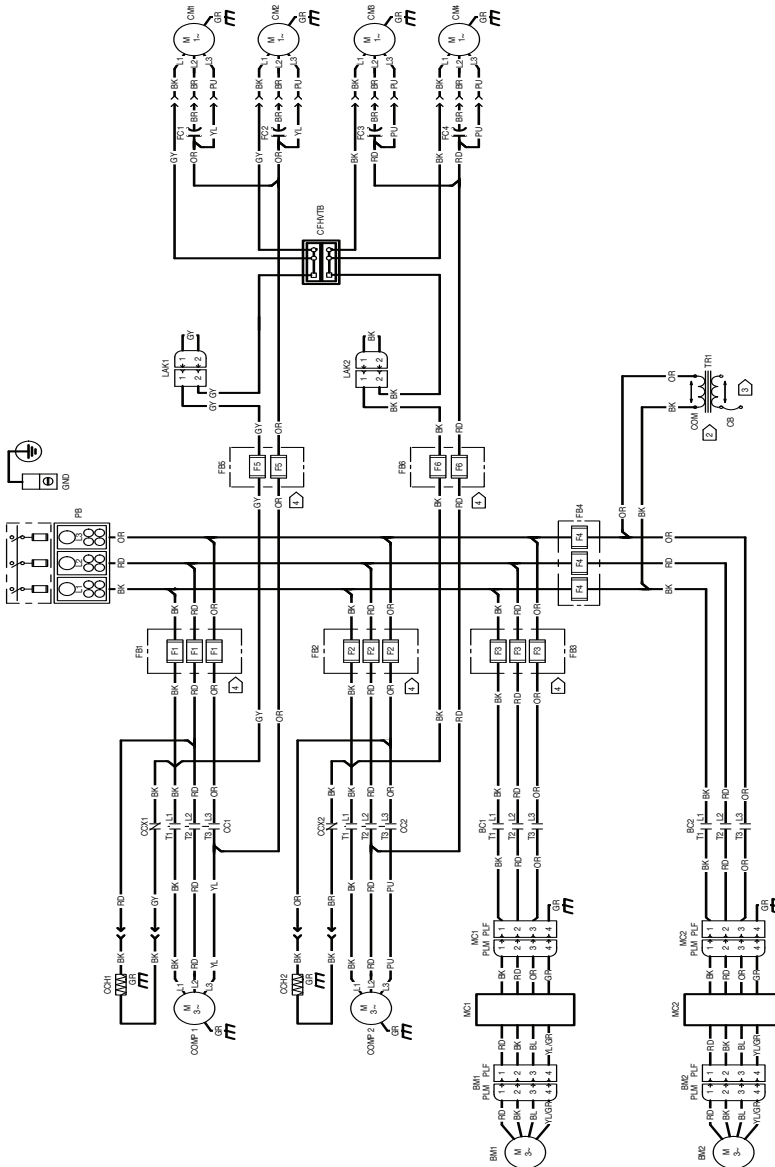

NOTES

1. REPLACEMENT WIRE MUST BE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (AT LEAST 160° C). USE COPPER CONDUCTORS ONLY. USE NEW LOW VOLTAGE FIELD CONNECTIONS.
2. USE P.C. CLASS 2 WIRE FOR LOW VOLTAGE FIELD CONNECTIONS.
3. TRY PRIMARY CHUCK (TO FIELD CONNECTIONS). REWINDERS CONNECTED TO DAUGHTER TAP AT THE FACTORY AND LOCK WIRE TO CUM TERNAL FOR 800 V SUPPLY POWER. WIRE RE WINDS FROM 4N TAP TO THE 208V TAP ON BOTH TRANSFORMERS.
4. SEE CONTROL DIAGRAM FOR CONTROL TRANSFORMER LOW VOLTAGE CONNECTIONS.
5. FUSE BLOCKS ARE OPTIONAL.

COMPONENT LEGEND

BC	BLOWER CONTACTOR
BWM	BLOWER MOTOR
CB	CIRCUIT BREAKER
CC	COMPRESSOR CONTACTOR
CCAS	COMPRESSOR CONTACTOR AUXILIARY SWITCH
CH	CRANKCASE HEATER
COH	COMPRESSOR CONTACTOR AUXILIARY SWITCH
CCX	COMPRESSOR CONTACTOR AUXILIARY SWITCH BLOCK
CF/HTB	CONDENSER FAN HIGH VOLTAGE TERMINAL
CM	CONDENSER MOTOR
CMC	CONDENSER MOTOR CONTACTOR
COMP	COMPRESSOR

WIRE CODE

BK	BLACK
BL	BLUE
BLPK	BLUE WITH PINK STRIPE
BR	BROWN
GR	GREEN
GY	GRAY
OR	ORANGE
PK	PINK
PUR	PURPLE
RD	RED
TN	TAN
WH	WHITE
YL	YELLOW
YLPK	YELLOW WITH PINK STRIPE

FACTORY WIRING

— HIGH VOLTAGE
— OPTIONAL HIGH VOLTAGE
- - - LOW VOLTAGE
- - - OPTIONAL LOW VOLTAGE
— CHASSIS GROUND

FIELD WIRING


— HIGH VOLTAGE
- - - LOW VOLTAGE
— EARTH GROUND



Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.




High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

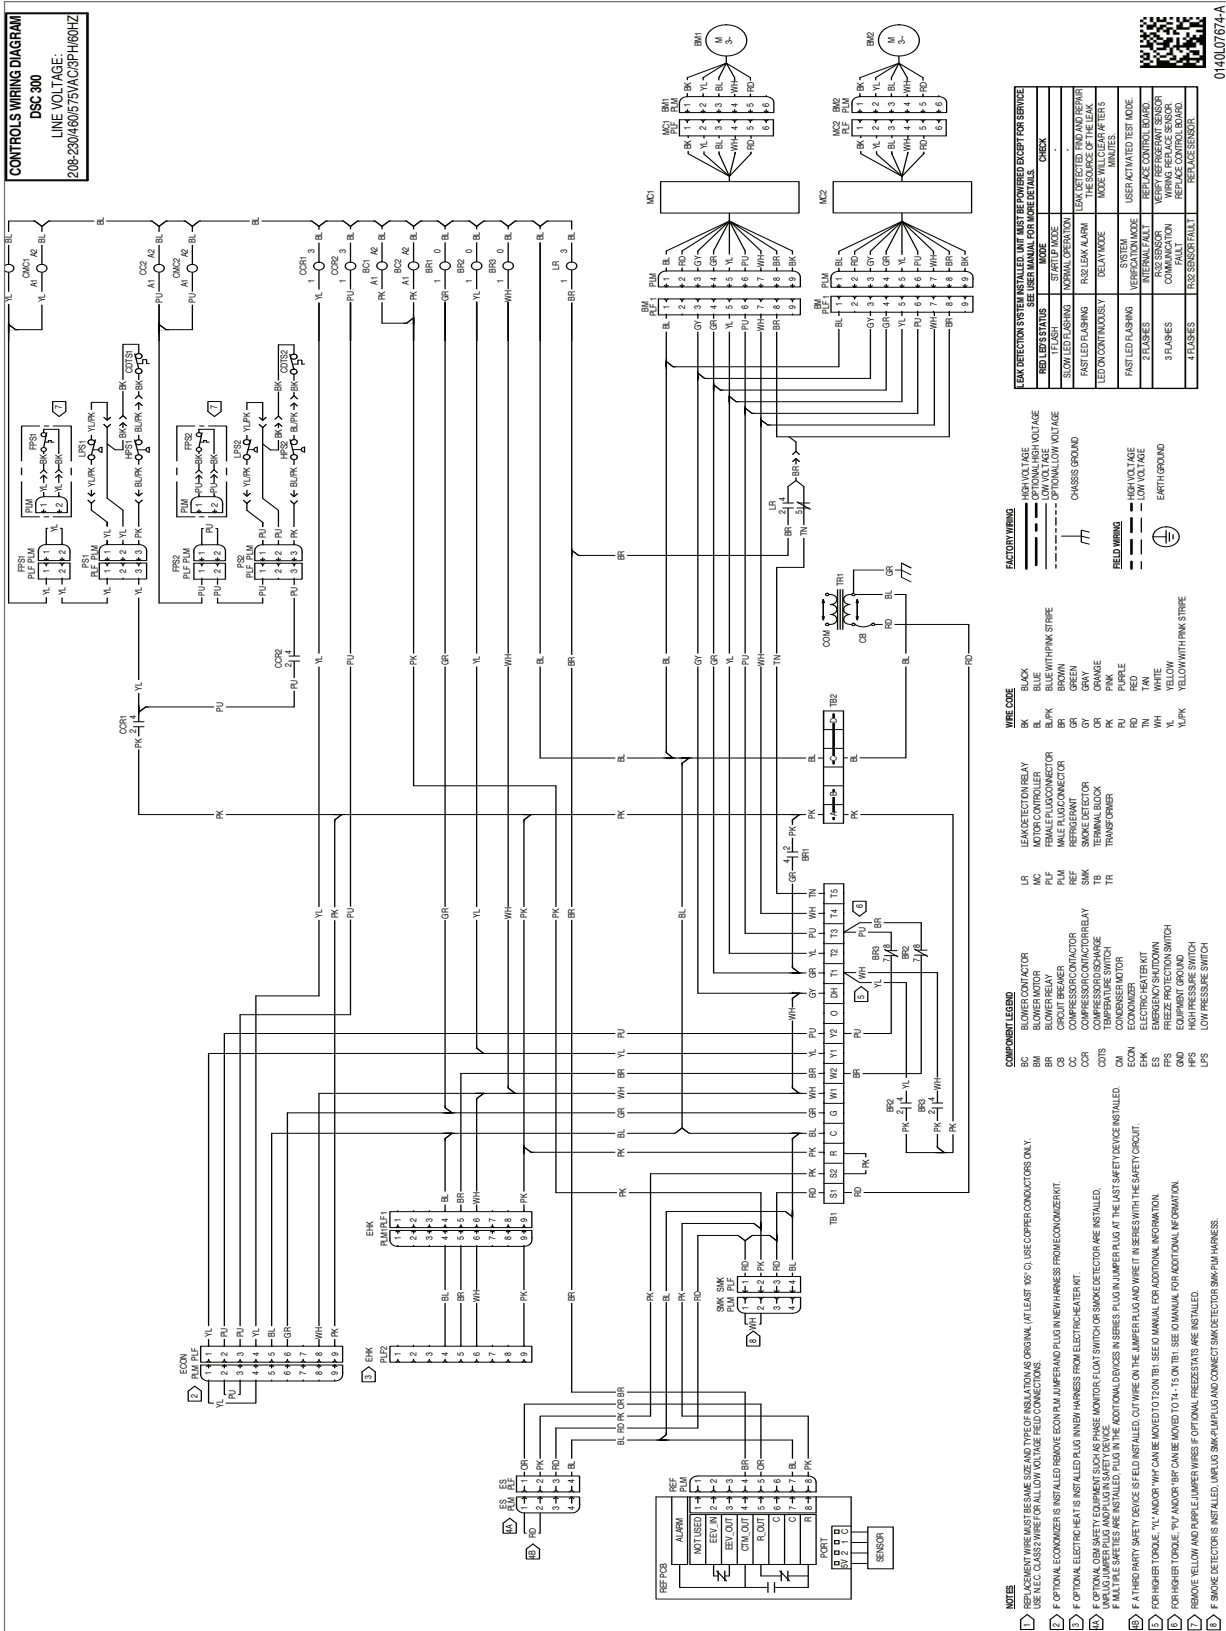

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

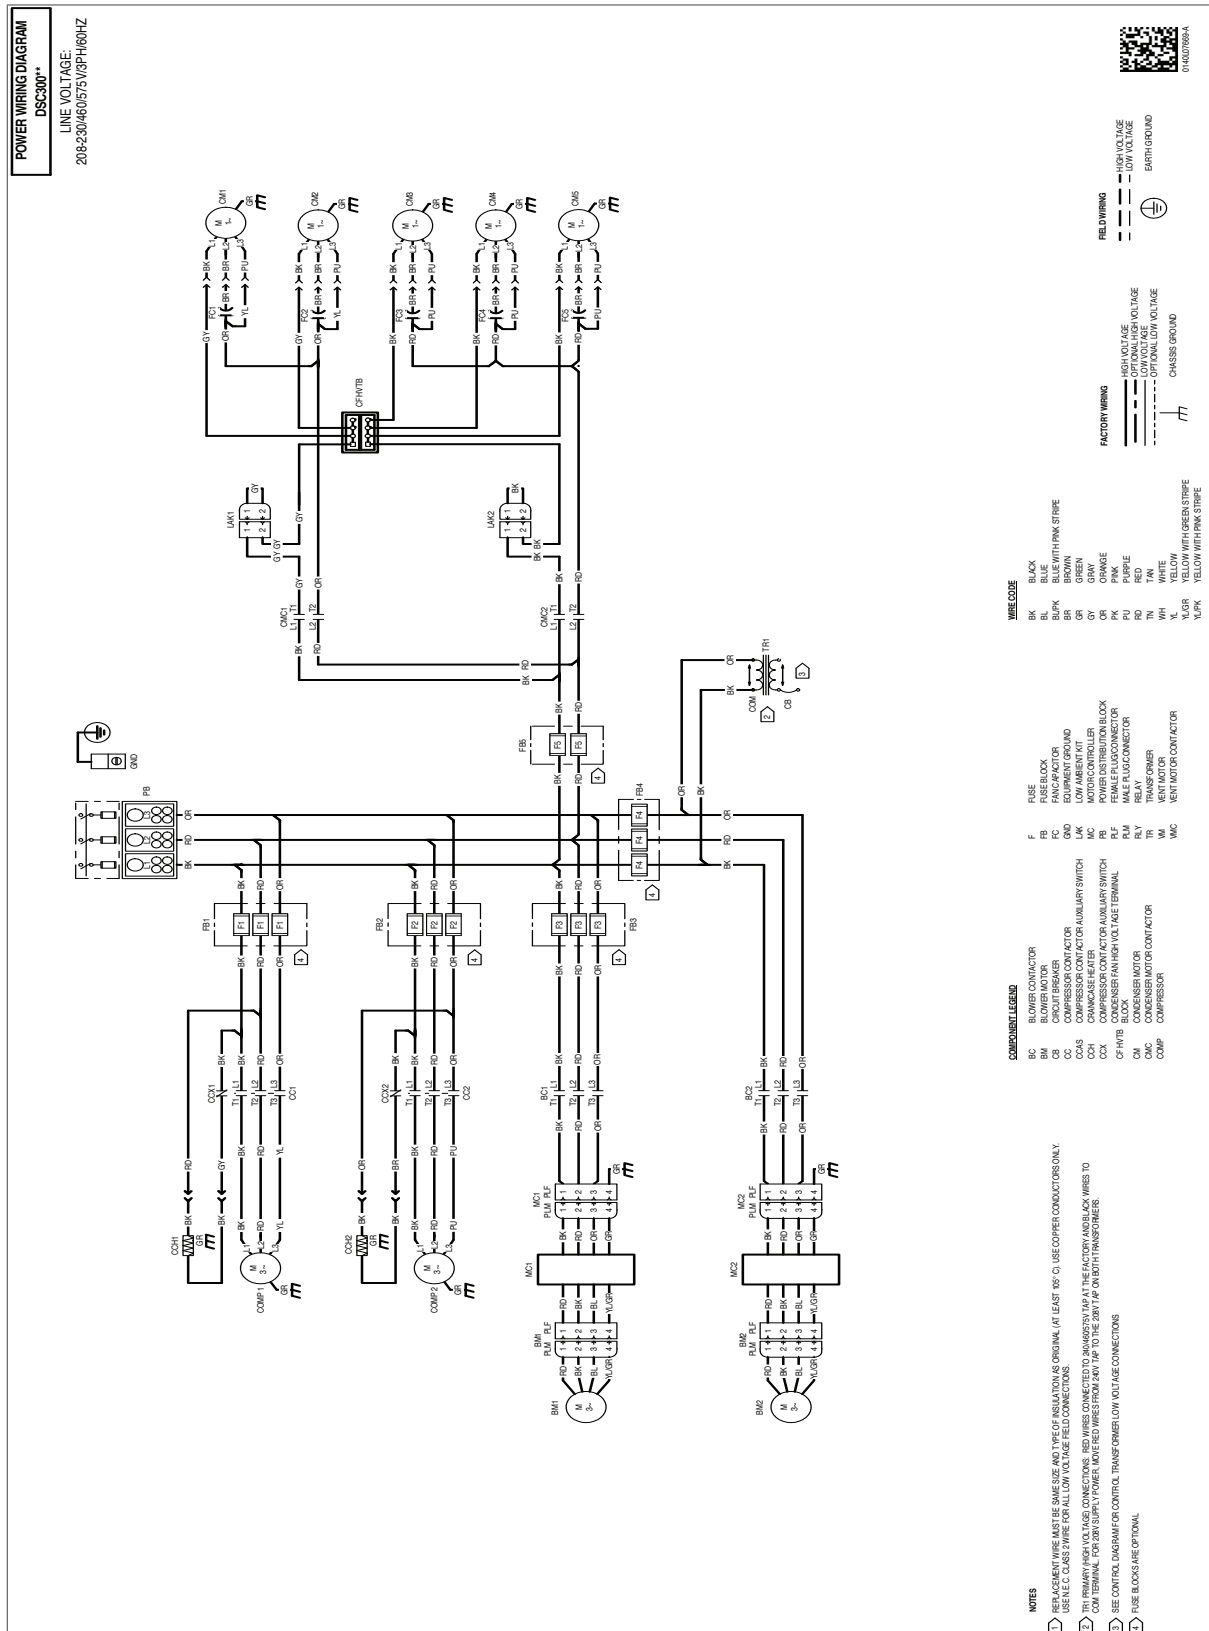

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

⚠ WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

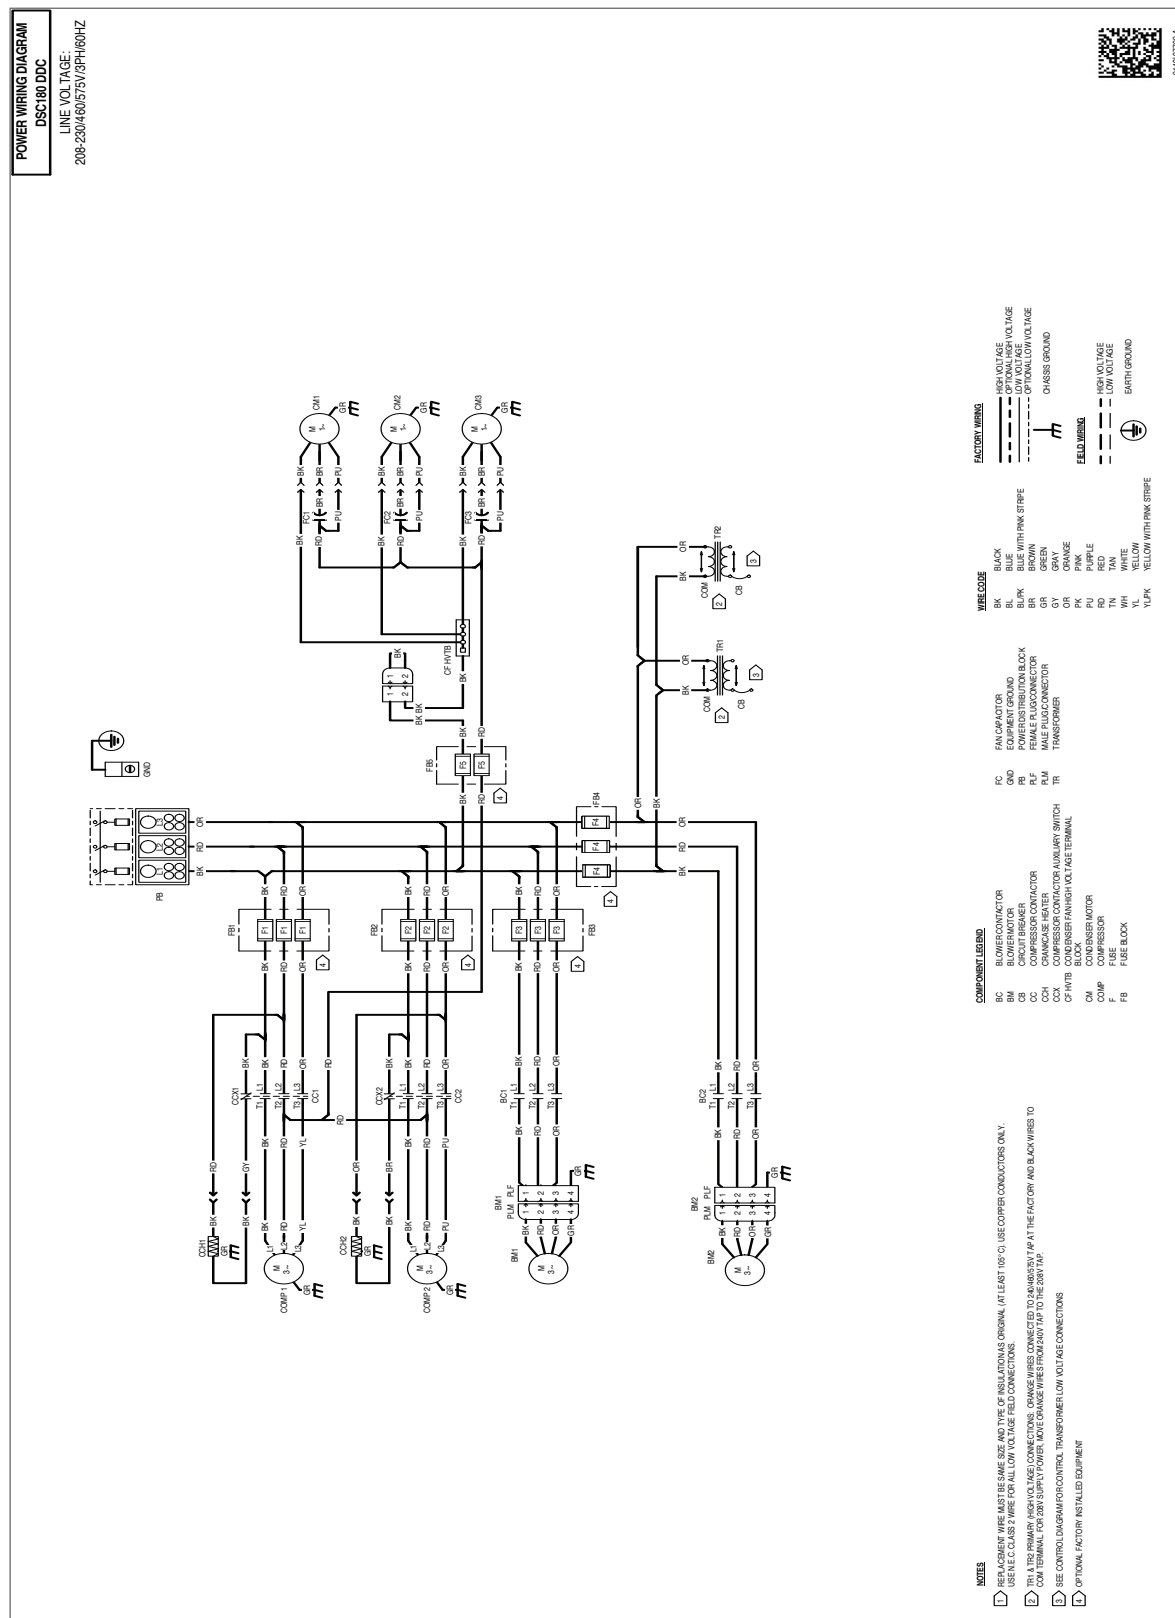


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

⚠ WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

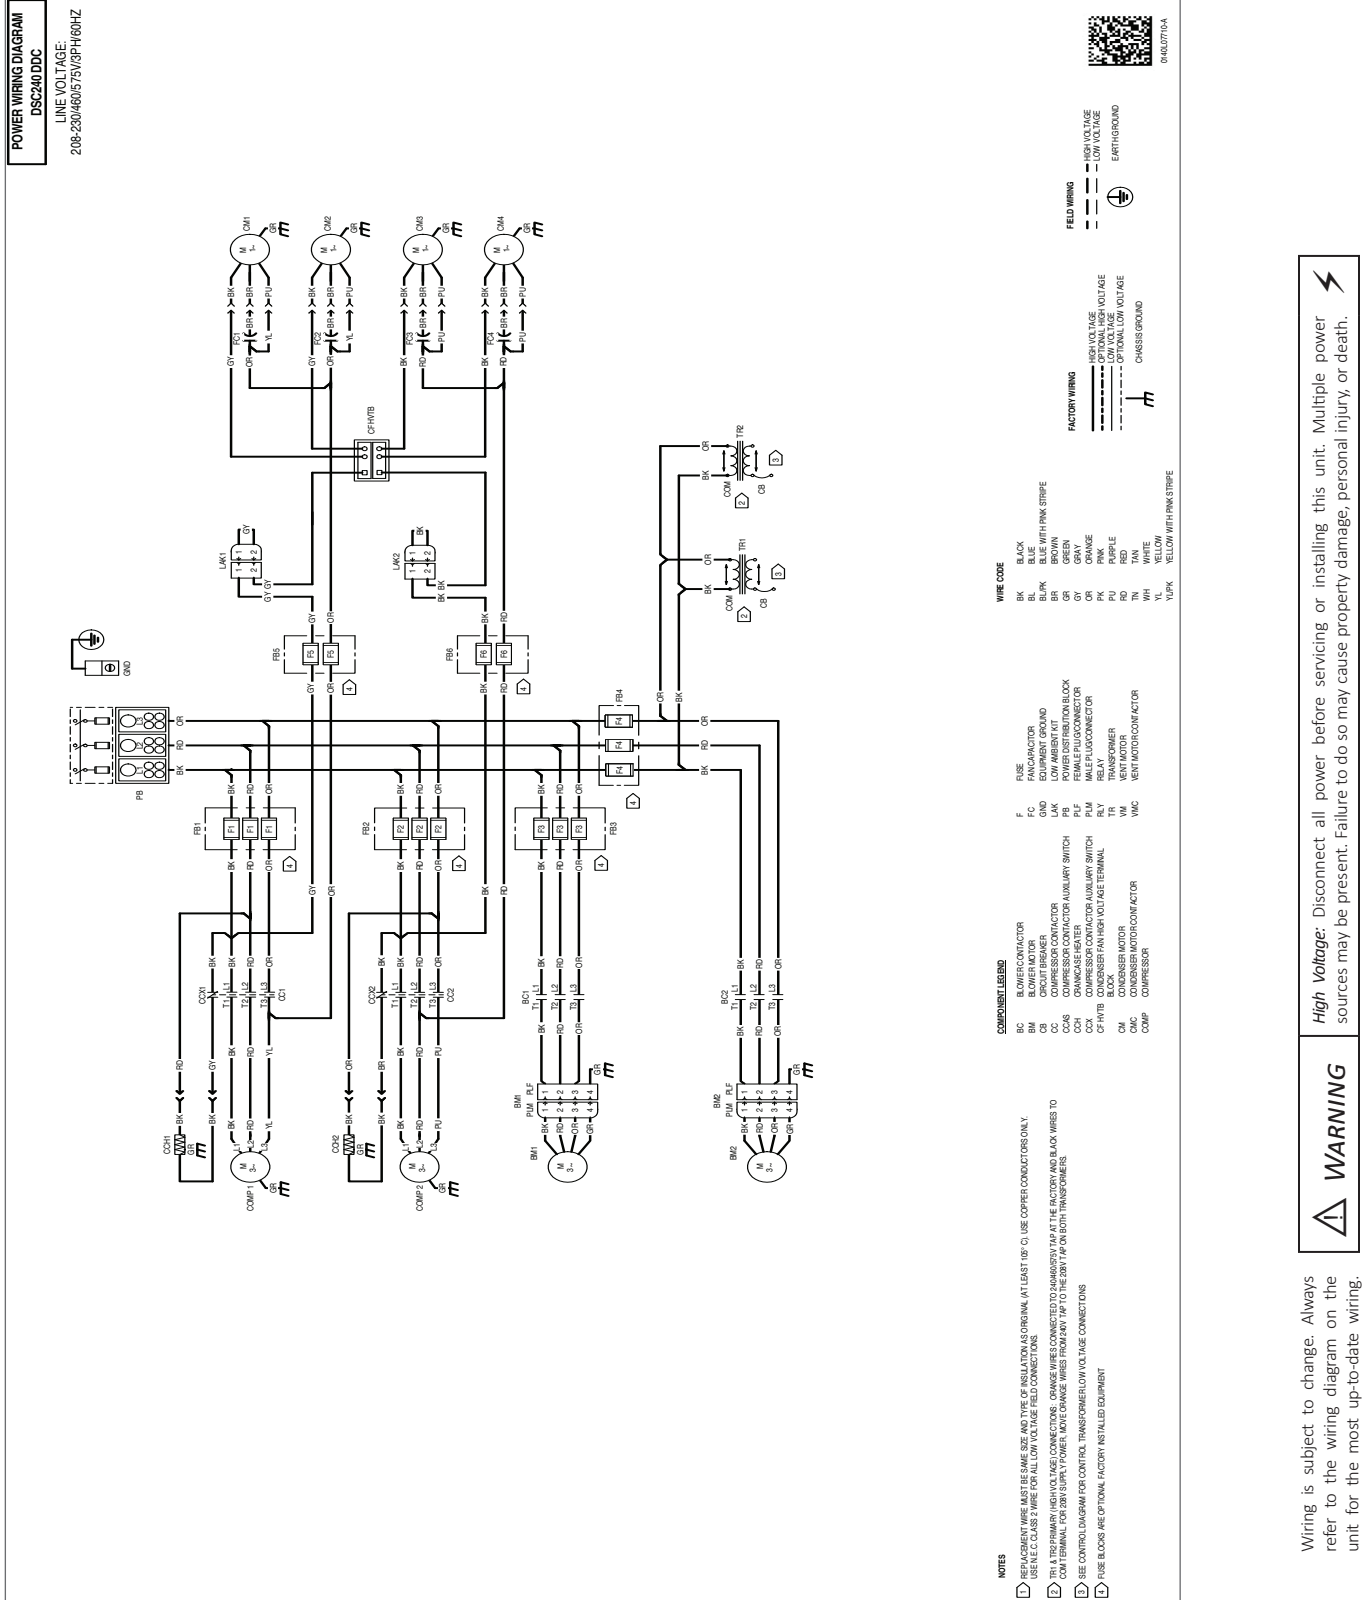


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.




Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.




Unit Clearances

Electrical Entrance Locations

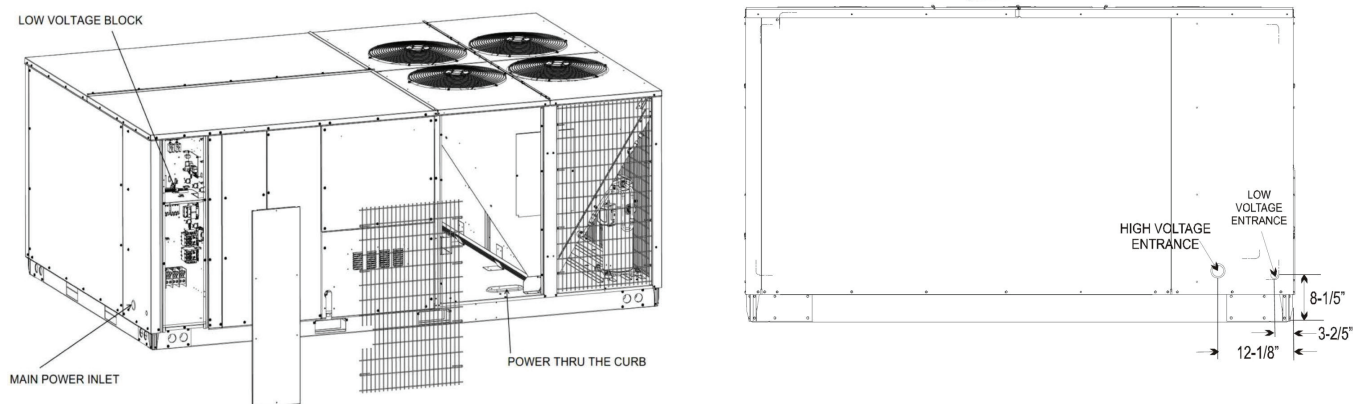

Service Clearance

Allow for recommended service clearances as shown in the image below. In situations that have multiple units, a 36" minimum clearance is required between the condenser coils. A clearance of 48" is recommended on all sides of the unit to allow service access and to ensure proper ventilation and condenser airflow. The top of the unit should be unobstructed. Provide a roof walkway along the sides of the unit for service and access to controls and components. Contact your Daikin sales representative for service requirements less than those recommended.

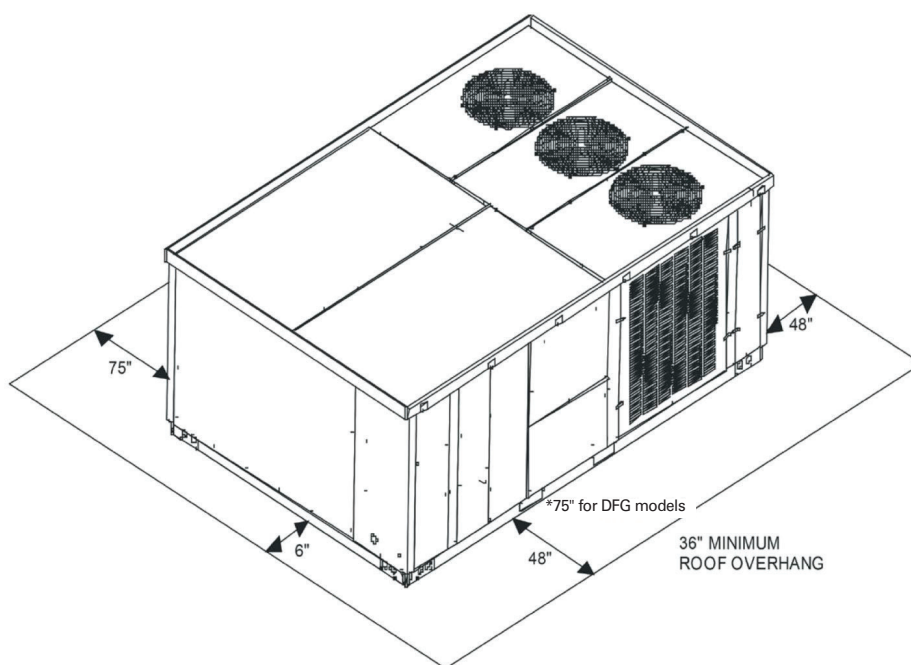

Unit Location

The structural engineer must verify that the roof has adequate support and ability to minimize deflection. Take extreme caution when using on a wooden roof structure. Unit condenser coils should be in a location that avoids any heated exhaust air.



Allow sufficient space around the unit for maintenance/service clearance. Consult your Daikin sales representative if available clearances do not meet minimum recommendations.

Where code considerations, such as the NEC, require extended clearances, these take precedence.

Provisions for forks have been included in the unit base frame. No other fork locations are approved.

- » Unit must be lifted by the four lifting holes located at the base frame corners.
- » Lifting cables should be attached to the unit with shackles.
- » The distance between the crane hook and the top of the unit must not be less than 60".
- » Two spreader bars must span over the unit to prevent damage to the cabinet by the lift cables. Spreader bars must be of sufficient length so that cables do not come in contact with the unit during transport. Remove wood struts mounted beneath unit base frame before setting unit on roof curb. These struts are intended to protect unit base frame from forklift damage. To remove the struts, extract the sheet metal retainers and pull the struts through the base of the unit. Refer to rigging label on the unit.

Important: If using bottom discharge with roof curb, duct-work should be attached to the curb prior to installing the unit. Refer to the Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual. Lower unit carefully onto roof mounting curb. While rigging the unit, the center of gravity will cause the condenser end to be lower than the supply air end. Bring condenser end of unit into alignment with the curb. With condenser end of the unit resting on curb member and using curb as a fulcrum, lower opposite end of the unit until entire unit is seated on the curb. When a rectangular cantilever curb is used, take care to center the unit. Check for proper alignment and orientation of supply and return openings with duct. For further and more detailed information please refer to our Daikin Light Commercial Packaged unit IOD.

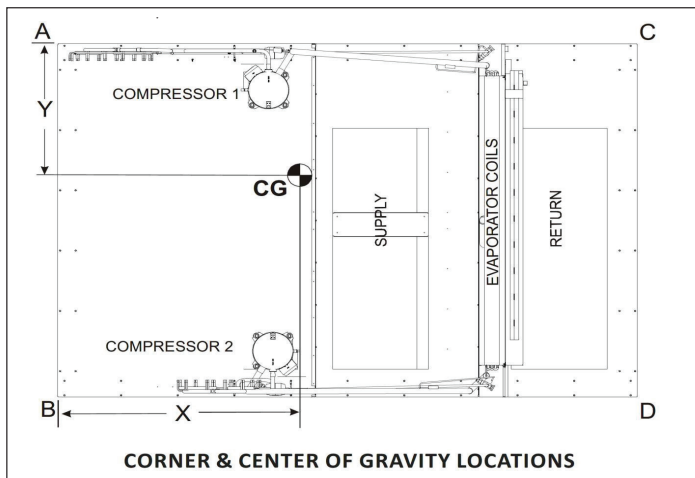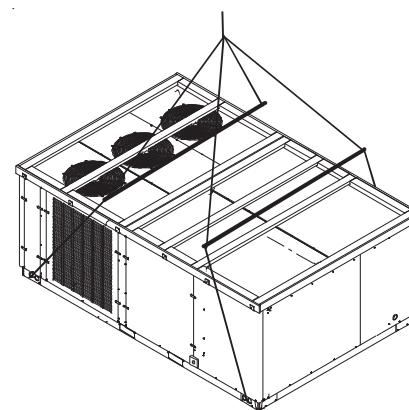

Roof Curb Installation

The roof curb is field-assembled and must be installed level (within 1/16" per foot side to side). A sub-base must be constructed by the contractor in applications involving pitched roofs. Gaskets are furnished and must be installed between the unit and curb. For proper installation, follow NRCA guidelines. In applications requiring post and rail installation, an I-beam securely mounted on multiple posts should support the unit on each side. In addition, the insulation on the underside of the unit should be protected from the elements. Applications in geographic areas subjected to seismic or hurricane conditions must meet code requirements for fastening the unit to the curb and the curb to the building structure.

Weights

MODEL	SHIPPING WEIGHT (LBS)	%OPERATING WEIGHT (LBS)	CORNER WEIGHTS (LBS)				LENGTH X (in)	WIDTH Y (in)
			A	B	C	D		
DSC1803D000001S	1851	1736	510	377	374	475	65½	45⅝
DSC1804D000001S	1851	1736	510	377	374	475	65½	45⅝
DSC1807D000001S	1851	1736	510	377	374	475	65½	45⅝
DSC2403D000001S	2204	2089	651	498	377	563	60¾	48⅞
DSC2404D000001S	2204	2089	651	498	377	563	60¾	48⅞
DSC2407D000001S	2204	2089	651	498	377	563	60¾	48⅞
DSC3003D000001S	2244	2129	651	501	440	538	61½	45⅝
DSC3004D000001S	2244	2129	651	501	440	538	61½	45⅝
DSC3007D000001S	2244	2129	651	501	440	538	61½	45⅝

For details on accessories refer to document **PM-LC-ACCESSORIES**