



A CSW Industrials Company

PRODUCT DATA SHEET

DUST FREE® LIGHTSTICK® GOLD

Germicidal UV Light

Description

Redesigned to deliver optimized germicidal UV performance, while also ensuring maximum safety compliance with unmatched operational stability. The Lightstick Gold sets the new standard for microbial inactivation and HVAC surface disinfection.

Packaging

Code	Size	Qty. per Case	Lbs. per Case	Cubic Ft per Case
DF19301	Lightstick Gold 15" lamp	1	2.35	0.31
DF19303	Replacement Lightstick Gold 15" lamp	1	0.35	2.12

Specifications

Size	Power Module 4.75" L x 3.16" W x 1.75" H Mounting Bracket (Magnetic) 3.5" L x 2.25" W x 4.2" H
Electrical	Power: 24VAC (Expanded range ballast: 20V-30V), 50/60Hz, 1.0A. 3000V surge protection Cordage: Two pre-crimped and pre-soldered wire leads. 3-ft 24V power input cable and 2-ft magnetic switch signal wire. 4-ft lamp cord
Listings	UL 2998 validated no ozone Meets California ozone emissions limit: CARB certified. Conforms to UL 60335-2-40:2022 Ed.4 and UL 1598:2021 Ed.5 Certified to CSA C22.2#60335-1:2016 Ed.2 and CSA C22.2#250.0:2021 Ed.5 Meets FCC part 15B EMI compliance
Safety Interlock	Magnetic.
Lamp	High-humidity, water-resistant, 15" lamp length. Includes filter shield
Construction	Injection-molded thermoplastic co-polymer high-strength power module




Manufactured by

RectorSeal, LLC

2601 Spenwick Drive • Houston, TX 77055, USA • 800-231-3345 • Fax 800-441-0051 • [rectorseal.com](https://www.rectorseal.com)

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2024 RectorSeal. All rights reserved. R51180-0724

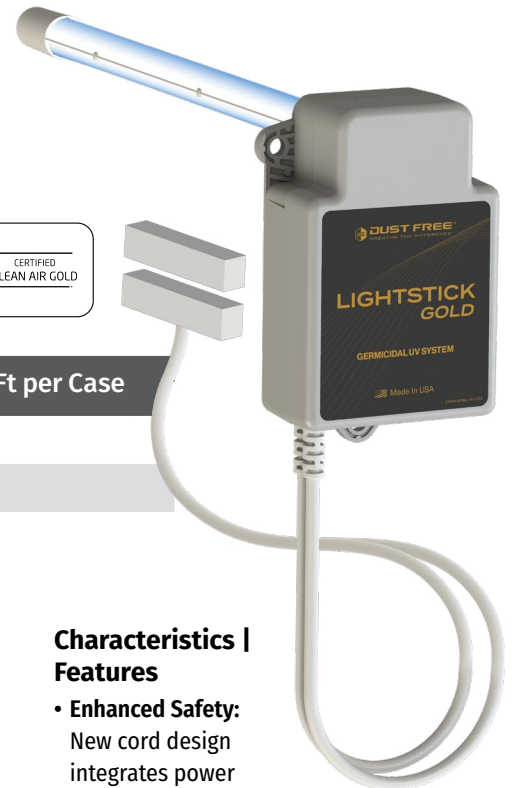

Characteristics | Features

- **Enhanced Safety:** New cord design integrates power and safety interlock for improved maintenance safety.
- **Ozone Free and Compliant:** Meets stringent ozone-free standards and is highly compliant with UV system regulations.
- **Reduced Interference:** FCC Part 15B EMI compliance ensures seamless, noise-free operation.
- **Reliable and Durable:** Features expanded range ballast with 3000V surge protection, pre-heated UV lamp for extended life, and superior heat tolerance.
- **Efficient and Stable Power:** Incorporates Power Factor Correction for reduced power consumption and a built-in lamp failure indicator for proactive maintenance.