


COOLING CAPACITY : 18,000 - 60,000 BTU/H

ENERGY-EFFICIENT SPLIT SYSTEM AIR CONDITIONER UP TO 15 SEER & 12.5 EER

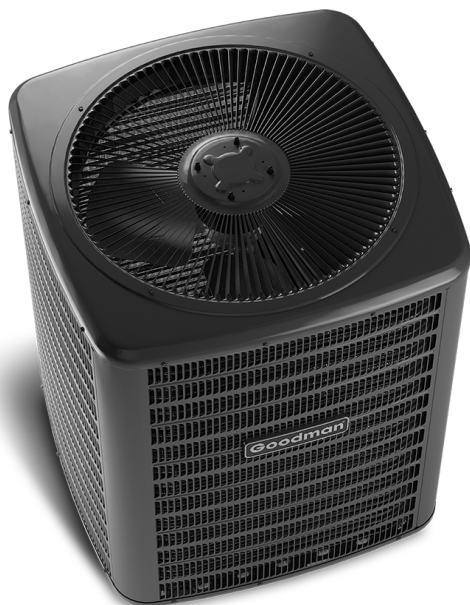

Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	5
Performance Data	29
AHRI Ratings	31
Wiring Diagrams	72
Dimensions	74
Accessories	74

Standard Features

- Energy-efficient compressor
- Single-speed condenser fan motor
- Factory-installed filter drier
- Copper tube/aluminum fin coil
- Service valves with sweat connections and easy-access gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with a louvered sound control top
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

	G	S	X	14	036	1	AA		
	1	2	3	4,5	6,7,8	9	10,11		
Brand							Engineering *		
G Goodman® Brand							Major & Minor revisions * Not used for inventory control.		
Product Category							Electrical		
S Split System							1 - 208/230 V, 1 Phase, 60 Hz		
Unit Type							Capacity		
X Condenser R-410A									
Z Heat Pump R-410A							018 - 1½ tons	030 - 2½ tons	042 3½ Tons
							019 - 1½ tons	031 - 2½ tons	043 3½ Tons
							024 - 2 tons	036 - 3 tons	048 4 Tons
							025 - 2 tons	037 - 3 tons	060 5 Tons
Efficiency									
13 13 SEER	16 16 SEER								
14 14 SEER	18 18 SEER								

	GSX14 0181L*	GSX14 0191K*	GSX14 0241L*	GSX14 0251L*	GSX14 0301K*	GSX14 0311K*
CAPACITIES						
Max Cooling (BTU/h)	18,000	18,000	24,000	24,000	30,000	30,000
SEER/EER	14 / 12	14 / 12.2	14 / 12	14 / 12.2	14 / 12.0	14 / 12.2
Decibels	72	71	74	71	74	72
COMPRESSOR						
RLA	6.0	9.0	7.7	13.5	12.8	12.8
LRA	37.5	47.5	38.0	58.3	64	67.8
CONDENSER FAN MOTOR						
Hp	1/8	1/8	1/8	1/8	1/6	1/6
FLA	0.7	0.7	0.7	0.7	0.95	0.95
REFRIGERATION SYSTEM						
Refrigerant Line Size ¹						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{2 3}	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Charge	75	68	72	75	80	90
Included piston:	0.051	0.053	0.057	0.057	0.065	0.063
ELECTRICAL DATA						
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ⁴	8.2	12	10.3	17.6	17.0	17.0
Max. Overcurrent Protection ⁵	15 amps	20 amps	15 amps	30 amps	25 amps	25 amps
Min/Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Conduit	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT	126	131	126	136	162	162
SHIPPING WEIGHT	141	146	141	153	180	180

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240.

For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

² Installer will need to supply 3/8" to 3/4" adapters for suction line connections.

³ Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.

⁴ Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

⁵ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

	GSX14 0361K*	GSX14 0371K*	GSX14 0421K*	GSX14 0431K*	GSX14 0481K*	GSX14 0601K*
CAPACITIES						
Nom Cool (BTU/h)	36,000	36,000	42,000	42,000	48,000	60,000
SEER/EER	14 / 12	14 / 12.2	14 / 12	14 / 12.2	14 / 11.7	14 / 11.7
Decibels	73	73	73	73	74	75
COMPRESSOR						
RLA	14.1	14.1	16.7	16.7	19.9	25.0
LRA	77	72.2	79	79	109	134
CONDENSER FAN MOTOR						
Hp	1/6	1/6	1/6	1/6	1/4	1/4
FLA	0.95	0.95	0.95	0.95	1.3	1.3
REFRIGERATION SYSTEM						
Refrigerant Line Size ¹						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	7/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{2 3}	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Charge	81	81	93	93	101	120
Included piston:	0.068	0.071	0.074	0.074	0.078	0.088
ELECTRICAL DATA						
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ⁴	18.6	18.6	21.8	21.8	26.2	32.6
Max. Overcurrent Protection ⁵	30 amps	30 amps	35 amps	35 amps	45 amps	50 amps
Min/Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Conduit	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT	162	162	189	189	220	260
SHIPPING WEIGHT	180	180	207	207	242	280

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240.

For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

² Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

³ Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

⁴ Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

⁵ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																			
				65						75						85						95						105						115					
				ENTERING INDOOR WET BULB TEMPERATURE																																			
70	525	MBh	15.8	16.4	17.9	-	15.4	16.0	17.5	-	15.1	15.6	17.1	-	14.7	15.2	16.7	-	14.0	14.5	15.9	-	12.9	13.4	14.7	-													
		S/T	0.69	0.57	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-													
		ΔT	19	16	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-													
		KW	0.93	0.95	0.98	-	1.01	1.03	1.07	-	1.08	1.10	1.14	-	1.13	1.16	1.20	-	1.19	1.21	1.26	-	1.23	1.26	1.30	-													
		Amps	4.2	4.3	4.4	-	4.5	4.6	4.7	-	4.9	5.0	5.1	-	5.2	5.3	5.4	-	5.5	5.6	5.8	-	5.8	5.9	6.1	-													
	600	Hi PR	206	222	234	-	231	249	263	-	263	283	299	-	300	322	340	-	337	363	383	-	372	401	423	-													
		LO PR	105	111	122	-	111	118	128	-	115	122	133	-	121	128	140	-	127	135	147	-	131	139	152	-													
		MBh	17.1	17.7	19.4	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.1	15.7	17.2	-	14.0	14.5	15.9	-													
		S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-													
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-													
675	KW	0.96	0.98	1.01	-	1.03	1.06	1.09	-	1.10	1.13	1.17	-	1.17	1.19	1.23	-	1.22	1.25	1.29	-	1.26	1.29	1.34	-														
	Amps	4.3	4.4	4.5	-	4.6	4.7	4.9	-	5.0	5.1	5.3	-	5.3	5.4	5.6	-	5.6	5.8	5.9	-	5.9	6.1	6.3	-														
	Hi PR	212	229	241	-	238	257	271	-	271	292	308	-	309	332	351	-	347	374	395	-	384	413	436	-														
	LO PR	108	115	125	-	114	121	132	-	118	126	138	-	124	132	145	-	130	139	151	-	135	144	157	-														
	MBh	17.6	18.2	19.9	-	17.1	17.8	19.5	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.5	16.1	17.6	-	14.4	14.9	16.3	-														
75	525	S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.86	0.71	0.50	-	0.86	0.72	0.50	-													
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-													
		KW	0.96	0.99	1.02	-	1.04	1.07	1.10	-	1.11	1.14	1.18	-	1.18	1.20	1.25	-	1.23	1.26	1.30	-	1.27	1.30	1.35	-													
		Amps	4.3	4.4	4.6	-	4.6	4.8	4.9	-	5.0	5.1	5.3	-	5.3	5.5	5.6	-	5.7	5.8	6.0	-	6.0	6.1	6.3	-													
		Hi PR	215	231	244	-	241	259	274	-	274	295	311	-	312	336	354	-	351	378	399	-	388	417	441	-													
	600	LO PR	109	116	127	-	115	122	134	-	120	127	139	-	126	134	146	-	132	140	153	-	136	145	158	-													
		MBh	16.1	16.5	17.9	19.2	15.7	16.2	17.5	18.8	15.3	15.8	17.1	18.3	15.0	15.4	16.7	17.9	14.2	14.6	15.8	17.0	13.2	13.5	14.7	15.7													
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.80	0.61	0.39													
		ΔT	22	20	17	11	22	21	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11													
		KW	0.94	0.96	0.99	1.03	1.02	1.04	1.08	1.11	1.08	1.11	1.15	1.19	1.14	1.17	1.21	1.25	1.20	1.22	1.27	1.31	1.24	1.27	1.31	1.36													
675	Amps	4.2	4.3	4.4	4.6	4.5	4.6	4.8	4.9	4.9	5.0	5.2	5.3	5.2	5.3	5.5	5.7	5.5	5.7	5.8	6.0	5.8	6.0	6.2	6.4														
	Hi PR	208	224	237	247	234	251	265	277	266	286	302	315	303	326	344	359	340	366	387	404	376	405	427	446														
	LO PR	106	112	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	148	158	132	141	154	164														
	MBh	17.4	17.9	19.4	20.8	17.0	17.5	19.0	20.3	16.6	17.1	18.5	19.9	16.2	16.7	18.1	19.4	15.4	15.8	17.2	18.4	14.3	14.7	15.9	17.1														
	S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.83	0.62	0.40	0.93	0.83	0.63	0.41														
75	525	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11													
		KW	0.96	0.99	1.02	1.05	1.04	1.07	1.10	1.14	1.11	1.14	1.18	1.22	1.18	1.25	1.29	1.23	1.26	1.30	1.35	1.27	1.30	1.35	1.40														
		Amps	4.3	4.4	4.6	4.7	4.6	4.8	4.9	5.1	5.0	5.1	5.3	5.5	5.3	5.5	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.1	6.3	6.6													
		Hi PR	215	231	244	254	241	259	274	285	274	295	311	325	312	336	355	370	351	378	399	416	388	417	441	460													
		LO PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169													
	600	MBh	17.9	18.4	19.9	21.4	17.4	18.0	19.4	20.9	17.0	17.5	19.0	20.4	16.6	17.1	18.5	19.9	15.8	16.2	17.6	18.9	14.6	15.0	16.3	17.5													
		S/T	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.61	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43													
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10													
		KW	0.97	0.99	1.03	1.06	1.05	1.08	1.11	1.15	1.12	1.15	1.19	1.23	1.19	1.21	1.26	1.30	1.24	1.27	1.31	1.36	1.29	1.32	1.36	1.41													
		Amps	4.4	4.5	4.6	4.8	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.4	5.5	5.7	5.9	5.7	5.9	6.0	6.3	6.0	6.2	6.4	6.6													
675	Hi PR	217	233	246	257	243	262	276	288	277	298	314	328	315	339	358	373	354	381	403	420	392	421	445	464														
	LO PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170														
	MBh	17.9	18.4	19.9	21.4	17.4	18.0	19.4	20.9	17.0	17.5	19.0	20.4	16.6	17.1	18.5	19.9	15.8	16.2	17.6	18.9	14.6	15.0	16.3	17.5														
	S/T	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.61	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43														
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10														
Shaded area reflects ACCA (TVA) conditions																																							
DB: Entering Indoor Dry Bulb Temperature																																							
-High and low pressures are measured at the liquid and suction service valves.																																							
kW = Total system power																																							
Amps = outdoor unit amps (comp.+fan)																																							

		Outdoor Ambient Temperature												115																			
		65						75						85						95						105							
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
525	MBh	16.4	16.7	17.9	19.1	16.0	16.3	17.4	18.6	15.6	15.9	17.0	18.2	15.2	15.6	16.6	17.8	14.5	14.8	15.8	16.9	13.4	13.7	14.6	15.6	13.4	13.7	14.6	15.6	13.4	13.7	14.6	15.6
	S/T	0.86	0.80	0.65	0.5	0.89	0.83	0.68	0.51	0.91	0.85	0.70	0.5	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.6	0.98	0.92	0.75	0.56	0.98	0.92	0.75	0.56	0.98	0.92	0.75	0.56
	ΔT	25	24	20	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	16	23	22	19	15	23	22	19	15	23	22	19	15
	KW	0.95	0.97	1.00	1.0	1.03	1.05	1.08	1.12	1.09	1.12	1.16	1.2	1.15	1.18	1.22	1.27	1.21	1.23	1.28	1.3	1.25	1.28	1.33	1.37	1.25	1.28	1.33	1.37	1.25	1.28	1.33	1.37
	Amps	4.2	4.3	4.5	4.6	4.6	4.7	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.4	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.0	6.2	6.4	5.9	6.0	6.2	6.4	5.9	6.0	6.2	6.4
600	HI PR	210	226	239	249	236	254	268	280	268	289	305	318	306	329	347	362	344	370	391	408	380	409	432	450	380	409	432	450	380	409	432	450
	LO PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165	134	142	155	165	134	142	155	165
	MBh	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.9	17.3	18.5	19.7	16.5	16.8	18.0	19.2	15.7	16.0	17.1	18.3	14.5	14.8	15.8	16.9	14.5	14.8	15.8	16.9	14.5	14.8	15.8	16.9
	S/T	0.89	0.83	0.68	0.5	0.92	0.86	0.70	0.53	0.95	0.89	0.72	0.5	0.98	0.91	0.74	0.56	1.00	0.95	0.77	0.6	1.00	0.96	0.78	0.58	1.00	0.95	0.77	0.6	1.00	0.96	0.78	0.58
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	25	24	21	16	24	23	20	16	22	22	19	15	22	22	19	15	22	22	19	15
675	KW	0.97	0.99	1.03	1.1	1.05	1.08	1.11	1.15	1.12	1.15	1.19	1.2	1.19	1.21	1.26	1.30	1.24	1.27	1.31	1.4	1.29	1.32	1.36	1.41	1.29	1.32	1.36	1.41	1.29	1.32	1.36	1.41
	Amps	4.4	4.5	4.6	4.8	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.4	5.5	5.7	5.9	5.7	5.9	6.0	6.3	6.0	6.2	6.4	6.6	6.0	6.2	6.4	6.6	6.0	6.2	6.4	6.6
	HI PR	217	233	246	257	243	262	276	288	277	298	314	328	315	339	358	374	355	382	403	420	392	422	445	464	392	422	445	464	392	422	445	464
	LO PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	148	157	133	142	155	165	138	146	160	170	138	146	160	170	138	146	160	170
	MBh	18.2	18.6	19.8	21.2	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.9	17.3	18.5	19.7	16.1	16.4	17.5	18.7	14.9	15.2	16.2	17.4	14.9	15.2	16.2	17.4	14.9	15.2	16.2	17.4
600	S/T	0.94	0.88	0.72	0.5	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.6	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.6	1.00	1.00	0.82	0.61	1.00	1.00	0.81	0.6	1.00	1.00	0.82	0.61
	ΔT	23	22	19	15	23	22	20	16	24	23	20	16	23	23	20	16	22	22	19	16	20	21	18	15	20	21	18	15	20	21	18	15
	KW	0.98	1.00	1.04	1.1	1.06	1.09	1.12	1.16	1.13	1.16	1.20	1.2	1.20	1.22	1.27	1.31	1.25	1.28	1.32	1.4	1.30	1.33	1.37	1.42	1.30	1.33	1.37	1.42	1.30	1.33	1.37	1.42
	Amps	4.4	4.5	4.6	4.8	4.7	4.8	5.0	5.2	5.1	5.2	5.4	5.6	5.4	5.6	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.2	6.4	6.7	6.1	6.2	6.4	6.7	6.1	6.2	6.4	6.7
	HI PR	219	236	249	260	246	264	279	291	279	301	318	331	318	343	362	377	358	385	407	424	396	426	450	469	396	426	450	469	396	426	450	469
600	LO PR	111	118	129	138	117	125	136	145	122	130	142	151	128	136	149	159	134	143	156	166	139	148	161	172	139	148	161	172	139	148	161	172

525	MBh	16.6	17.0	17.8	19.0	16.3	16.6	17.4	18.5	15.9	16.2	16.9	18.1	15.5	15.8	16.5	17.6	14.7	15.0	15.7	16.8	13.6	13.9	14.5	15.5
	S/T	0.90	0.87	0.78	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.90	0.73
	ΔT	26	26	24	21	27	26	25	21	27	26	25	21	27	26	25	22	26	26	25	21	24	24	23	20
	KW	0.96	0.98	1.01	1.04	1.03	1.06	1.09	1.13	1.10	1.13	1.17	1.21	1.17	1.19	1.23	1.28	1.22	1.25	1.29	1.34	1.26	1.29	1.34	1.39
	Amps	4.3	4.4	4.5	4.7	4.6	4.7	4.9	5.0	5.0	5.1	5.2	5.4	5.3	5.4	5.6	5.8	5.6	5.8	5.9	6.1	5.9	6.1	6.3	6.5
600	HI PR	212	229	241	252	238	256	271	282	271	292	308	321	309	332	351	366	347	374	395	412	384	413	436	455
	LO PR	108	115	125	133	114	121	132	141	118	126	138	147	124	132	145	154	130	139	151	161	135	143	157	167
	MBh	18.0	18.4	19.3	20.5	17.6	18.0	18.8	20.1	17.2	17.5	18.4	19.6	16.8	17.1	17.9	19.1	15.9	16.2	17.0	18.2	14.8	15.0	15.8	16.8
	S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76
	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	24	25	24	21	23	23	23	19
675	KW	0.98	1.00	1.04	1.07	1.06	1.09	1.12	1.16	1.13	1.16	1.20	1.24	1.20	1.22	1.27	1.31	1.25	1.28	1.32	1.37	1.30	1.33	1.37	1.42
	Amps	4.4	4.5	4.6	4.8	4.7	4.8	5.0	5.2	5.1	5.2	5.4	5.6	5.4	5.6	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.2	6.4	6.7
	HI PR	219	236	249	260	246	264	279	291	279	301	318	331	318	343	362	377	358	385	407	424	396	426	450	469
	LO PR	111	118	129	138	117	125	136	145	122	130	142	151	128	136	149	159	134	143	156	166	139	148	161	172
	MBh	18.5	18.8	19.7	21.1	18.1	18.4	19.3	20.6	17.6	18.0	18.8	20.1	17.2	17.5	18.4	19.6	16.3	16.7	17.4	18.6	15.1	15.4	16.2	17.2
	S/T	0.98	0.95	0.86	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80
	ΔT	25	24	23	20	25	25	23	20	24	24	23	20	23	24	23	20	22	23	23	20	21	21	22	19
	KW	0.99	1.01	1.05	1.08	1.07	1.10	1.13	1.17	1.14	1.17	1.21	1.25	1.21	1.24	1.28	1.32	1.26	1.29	1.34	1.38	1.31	1.34	1.39	1.44
	Amps	4.4	4.5	4.7	4.8	4.8	4.9	5.0	5.2	5.2	5.3	5.4	5.6	5.5	5.6	5.8	6.0	5.8	6.0	6.1	6.4	6.2	6.3	6.5	6.7
	HI PR	221	238	251	262	248	267	282	294	282	304	321	335	321	346	365	381	362	389	411	429	400	430	454	474
LO PR	112	119	130	139	119	126	138	147	123	131	143	153	130	138	150	160	136	144	158	168	140	149	163	174	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

KW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																		115											
		65						75						85						95						105					
		ENTERING INDOOR WET BULB TEMPERATURE																													
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71						
70	550	MBh	18.1	18.4	18.9	-	18.0	18.2	18.8	-	17.5	17.8	18.3	-	16.7	17.0	17.5	-	15.7	16.0	16.5	-	14.8	15.1	15.6	-					
	S/T	0.65	0.57	0.44	-	0.65	0.58	0.45	-	0.68	0.60	0.47	-	1.00	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-						
	ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	18	14	-	21	19	15	-						
	KW	1.05	1.05	1.05	-	1.17	1.17	1.16	-	1.30	1.30	1.29	-	1.44	1.44	1.43	-	1.59	1.59	1.59	-	1.78	1.78	1.77	-						
	Amps	3.9	3.9	3.9	-	4.4	4.4	4.4	-	5.0	5.0	5.0	-	5.7	5.7	5.6	-	6.4	6.4	6.4	-	7.2	7.2	7.2	-						
	HI PR	240	241	242	-	277	278	280	-	316	318	319	-	359	360	362	-	404	405	407	-	453	454	456	-						
	LO PR	125	126	129	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-						
600	MBh	18.3	18.6	19.1	-	18.2	18.4	19.0	-	17.7	18.0	18.5	-	16.9	17.2	17.7	-	15.9	16.2	16.7	-	15.0	15.3	15.8	-						
	S/T	0.67	0.60	0.47	-	0.68	0.61	0.47	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-						
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-						
	KW	1.05	1.05	1.05	-	1.17	1.17	1.17	-	1.30	1.30	1.30	-	1.44	1.44	1.44	-	1.60	1.60	1.59	-	1.78	1.78	1.78	-						
	Amps	3.9	3.9	3.9	-	4.4	4.4	4.4	-	5.0	5.0	5.0	-	5.7	5.7	5.7	-	6.4	6.4	6.4	-	7.2	7.2	7.2	-						
	HI PR	241	242	244	-	279	280	281	-	318	319	321	-	360	361	363	-	406	407	409	-	455	456	457	-						
	LO PR	126	128	131	-	133	135	138	-	140	142	145	-	146	147	150	-	151	152	156	-	158	159	162	-						
675	MBh	18.7	18.9	19.5	-	18.5	18.8	19.3	-	18.1	18.3	18.9	-	17.3	17.5	18.1	-	16.3	16.5	17.1	-	15.4	15.6	16.2	-						
	S/T	0.69	0.62	0.49	-	0.70	0.62	0.49	-	0.72	0.65	0.52	-	1.00	0.67	0.53	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-						
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-						
	KW	1.06	1.06	1.06	-	1.18	1.17	1.17	-	1.30	1.30	1.30	-	1.45	1.44	1.44	-	1.60	1.60	1.60	-	1.79	1.79	1.78	-						
	Amps	3.9	3.9	3.9	-	4.5	4.5	4.5	-	5.1	5.1	5.0	-	5.7	5.7	5.7	-	6.4	6.4	6.4	-	7.3	7.3	7.2	-						
	HI PR	243	244	246	-	281	282	283	-	320	321	323	-	362	363	365	-	408	409	411	-	457	458	459	-						
	LO PR	128	130	133	-	136	137	141	-	142	144	147	-	148	149	153	-	153	155	158	-	160	162	165	-						
75	550	MBh	18.2	18.4	18.9	19.8	18.0	18.2	18.8	19.6	17.5	17.8	18.3	19.1	16.7	17.0	17.5	18.3	15.7	16.0	16.5	17.3	14.8	15.1	15.6	16.4					
	S/T	0.77	0.70	0.57	0.43	0.78	0.70	0.57	0.43	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55						
	ΔT	24	22	18	15	24	22	18	15	24	22	19	15	24	22	18	15	24	22	18	14	25	23	19	16						
	KW	1.05	1.05	1.05	1.06	1.17	1.16	1.16	1.17	1.30	1.29	1.29	1.30	1.44	1.44	1.43	1.44	1.59	1.59	1.59	1.60	1.78	1.78	1.77	1.78						
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.4	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2						
	HI PR	240	241	243	247	277	278	280	284	317	318	319	324	359	360	362	366	405	406	407	411	453	454	456	460						
	LO PR	125	126	129	134	132	134	137	142	139	140	143	148	144	146	149	154	150	151	154	159	156	158	161	166						
600	MBh	18.4	18.6	19.1	20.0	18.2	18.4	19.0	19.8	17.7	18.0	18.5	19.3	16.9	17.2	17.7	18.5	15.9	16.2	16.7	17.5	15.0	15.3	15.8	16.6						
	S/T	0.80	0.73	0.59	0.45	1.00	0.73	0.60	0.46	1.00	0.76	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.53	1.00	1.00	0.71	0.58						
	ΔT	23	21	18	14	23	21	18	14	24	22	18	14	23	21	18	14	23	21	17	14	24	22	19	15						
	KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.59	1.60	1.78	1.78	1.78	1.79						
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.4	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3						
	HI PR	241	242	244	248	279	280	282	286	318	319	321	325	360	361	363	367	406	407	409	413	455	456	457	462						
	LO PR	126	128	131	136	133	135	138	143	140	142	145	150	146	147	150	155	151	153	156	161	158	159	162	168						
675	MBh	18.7	19.0	19.5	20.3	18.5	18.8	19.3	20.2	18.1	18.3	18.9	19.7	17.3	17.5	18.1	18.9	16.3	16.5	17.1	17.9	15.4	15.6	16.2	17.0						
	S/T	0.82	0.74	0.61	0.47	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	1.00	0.68	0.54	1.00	1.00	0.73	0.59						
	ΔT	22	20	17	13	22	20	17	13	23	21	17	13	22	20	17	13	22	20	16	13	23	21	18	14						
	KW	1.06	1.06	1.06	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.61	1.79	1.78	1.78	1.79						
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.4	4.5	5.1	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.2	7.3						
	HI PR	244	245	246	250	281	282	284	288	320	321	323	327	363	364	365	369	408	409	411	415	457	458	460	464						
	LO PR	128	130	133	138	136	137	141	146	142	144	147	152	148	149	153	158	153	155	158	163	160	162	165	170						
		Shaded area reflects ACCA (TVA) conditions																		kW = Total system power											
		IDB: Entering Indoor Dry Bulb Temperature																		Amps = outdoor unit amps (comp. fan)											
		High and low pressures are measured at the liquid and suction service valves.																													

		65										75										85										95										105										115									
		OUTDOOR AMBIENT TEMPERATURE																																																											
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																												
80	550	MBh	18.2	18.5	19.0	19.8	18.1	18.3	18.9	19.7	17.6	17.9	18.4	19.2	16.8	17.1	17.6	18.4	15.8	16.1	16.6	17.4	14.9	15.2	15.7	16.5	14.9	15.2	15.7	16.5	14.9	15.2	15.7	16.5																											
		S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67																											
		ΔT	28	26	23	19	28	26	23	19	29	27	23	19	28	26	23	19	28	26	22	19	29	27	24	20	29	27	24	20	29	27	24	20																											
		KW	1.05	1.05	1.05	1.1	1.17	1.17	1.16	1.17	1.30	1.30	1.29	1.3	1.44	1.44	1.43	1.44	1.59	1.59	1.59	1.6	1.78	1.78	1.77	1.78	1.78	1.78	1.77	1.78	1.78	1.77	1.78	1.78	1.77	1.78																									
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2																									
80	600	HI PR	240	241	243	247	278	279	281	285	317	318	320	324	359	360	362	366	405	406	408	412	454	455	456	461	454	455	456	461	454	455	456	461																											
		LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	155	150	152	155	160	157	158	162	167	157	158	162	167	157	158	162	167																											
		MBh	18.4	18.7	19.2	20.0	18.3	18.5	19.1	19.9	17.8	18.1	18.6	19.4	17.0	17.3	17.8	18.6	16.0	16.3	16.8	17.6	15.1	15.4	15.9	16.7	15.1	15.4	15.9	16.7	15.1	15.4	15.9	16.7																											
		S/T	1.00	0.85	0.72	0.6	1.00	0.85	0.72	0.58	1.00	0.88	0.75	0.6	1.00	1.00	0.76	0.63	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.70	1.00	1.00	0.84	0.70	1.00	1.00	0.84	0.70																											
		ΔT	28	26	22	18	28	26	22	18	28	26	22	19	28	26	22	18	27	25	22	18	28	27	23	19	28	27	23	19	28	27	23	19																											
80	600	KW	1.05	1.05	1.05	1.1	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.59	1.6	1.78	1.78	1.78	1.79	1.78	1.78	1.78	1.78	1.78	1.78	1.79																											
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	7.2	7.2	7.2	7.2	7.2	7.2	7.3																												
		HI PR	242	243	244	249	279	280	282	286	319	320	321	325	361	362	364	368	406	408	409	413	455	456	458	462	455	456	458	462	455	456	458	462																											
		LO PR	127	128	131	136	134	136	139	144	141	142	145	150	146	148	151	156	152	153	156	161	158	160	163	168	158	160	163	168	158	160	163	168																											
		MBh	18.8	19.1	19.6	20.4	18.6	18.9	19.4	20.2	18.2	18.4	19.0	19.8	17.4	17.6	18.2	19.0	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1	15.5	15.7	16.3	17.1	15.5	15.7	16.3	17.1																											
675	675	S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.6	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71																											
		ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18	28	26	22	18	28	26	22	18																											
		KW	1.06	1.06	1.06	1.1	1.18	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.45	1.44	1.44	1.45	1.60	1.60	1.60	1.60	1.79	1.78	1.78	1.79	1.79	1.78	1.78	1.78	1.78	1.78	1.78	1.79																											
		Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.4	4.5	5.1	5.1	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3																										
		HI PR	244	245	247	251	281	282	284	288	323	322	322	328	363	364	366	370	409	410	411	411	416	457	458	460	464	457	458	460	464	457	458	460	464																										
675	675	LO PR	129	130	134	139	136	138	141	146	143	144	148	153	149	150	153	158	154	155	159	164	161	162	165	171	161	162	165	171	161	162	165	171																											

85	550	MBh	18.5	18.8	19.3	20.2	18.4	18.6	19.2	20.0	17.9	18.2	18.7	19.5	17.1	17.4	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.5	16.0	16.8
		S/T	1.00	0.92	0.79	0.65	1.00	1.00	0.79	0.65	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77
		ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	27	24
		KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.17	1.30	1.30	1.30	1.30	1.44	1.44	1.44	1.44	1.60	1.59	1.59	1.60	1.78	1.78	1.78	1.79
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3
600	MBh	18.7	19.0	19.5	20.4	18.6	18.8	19.4	20.2	18.1	18.4	18.9	19.7	17.3	17.6	18.1	18.9	16.3	16.6	17.1	17.9	15.4	15.7	16.2	17.0	
	S/T	1.00	0.95	0.81	0.67	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.75	1.00	1.00	1.00	0.80	
	ΔT	31	29	26	22	31	29	26	22	32	30	26	22	31	29	26	22	31	29	26	22	32	30	27	23	
	KW	1.06	1.06	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.61	1.78	1.78	1.78	1.79	
	Amps	3.9	3.9	3.9	3.9	4.5	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	
675	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
600	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
675	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
600	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
675	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
600	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
675	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
600	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
675	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.31	1.31	1.45	1.45	1.45	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
600	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30								

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65				75				85				95				105				115			
				ENTERING INDOOR WET BULB TEMPERATURE																							
59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	725	MBh	22.1	22.9	25.1	-	21.6	22.3	24.5	-	21.0	21.8	23.9	-	20.5	21.3	23.3	-	19.5	20.2	22.2	-	18.1	18.7	20.5	-	
		S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	
		KW	1.26	1.29	1.33	-	1.37	1.40	1.45	-	1.46	1.50	1.55	-	1.54	1.58	1.64	-	1.62	1.65	1.71	-	1.68	1.72	1.78	-	
		Amps	5.5	5.6	5.8	-	5.9	6.1	6.2	-	6.4	6.6	6.8	-	6.8	7.0	7.2	-	7.3	7.4	7.7	-	7.7	7.9	8.1	-	
		HI PR	217	233	246	-	243	262	276	-	277	298	314	-	315	339	358	-	354	381	403	-	391	421	445	-	
		LO PR	106	113	123	-	112	119	130	-	117	124	135	-	122	130	142	-	128	136	149	-	133	141	154	-	
70	800	MBh	22.4	23.2	25.4	-	21.9	22.7	24.8	-	21.4	22.1	24.3	-	20.8	21.6	23.7	-	19.8	20.5	22.5	-	18.3	19.0	20.8	-	
		S/T	0.73	0.61	0.42	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.48	-	0.84	0.70	0.49	-	
		ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	12	-	18	15	12	-	
		KW	1.27	1.30	1.34	-	1.37	1.41	1.46	-	1.47	1.50	1.56	-	1.55	1.59	1.65	-	1.63	1.66	1.72	-	1.69	1.73	1.79	-	
		Amps	5.5	5.7	5.8	-	6.0	6.1	6.3	-	6.4	6.6	6.8	-	6.9	7.0	7.3	-	7.3	7.5	7.7	-	7.7	7.9	8.2	-	
		HI PR	218	235	248	-	245	263	278	-	278	300	316	-	317	341	360	-	357	384	405	-	394	424	448	-	
		LO PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-	
900	725	MBh	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.8	22.6	24.7	-	21.3	22.0	24.1	-	20.2	20.9	22.9	-	18.7	19.4	21.2	-	
		S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-	
		ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-	
		KW	1.28	1.31	1.36	-	1.39	1.42	1.47	-	1.49	1.52	1.58	-	1.57	1.61	1.67	-	1.64	1.68	1.75	-	1.71	1.75	1.81	-	
		Amps	5.6	5.7	5.9	-	6.0	6.2	6.4	-	6.5	6.7	6.9	-	7.0	7.1	7.3	-	7.4	7.6	7.8	-	7.8	8.0	8.3	-	
		HI PR	221	238	251	-	248	267	282	-	282	304	321	-	321	346	365	-	361	389	411	-	399	430	454	-	
		LO PR	108	115	126	-	114	122	133	-	119	126	138	-	125	133	145	-	131	139	152	-	135	144	157	-	
75	725	MBh	22.4	23.1	25.0	26.8	21.9	22.6	24.4	26.2	21.4	22.0	23.9	25.6	20.9	21.5	23.3	25.0	19.8	20.4	22.1	23.7	18.4	18.9	20.5	22.0	
		S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40	
		ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11	
		KW	1.27	1.30	1.35	1.39	1.38	1.41	1.46	1.51	1.47	1.51	1.56	1.62	1.56	1.56	1.60	1.65	1.71	1.63	1.67	1.73	1.79	1.69	1.73	1.80	1.86
		Amps	5.5	5.7	5.8	6.1	6.0	6.1	6.3	6.5	6.5	6.6	6.8	7.1	6.9	7.1	7.3	7.6	7.3	7.5	7.7	8.0	7.7	7.9	8.2	8.5	
		HI PR	219	236	249	259	246	264	279	291	279	301	317	331	318	318	342	362	377	358	385	407	424	395	426	449	469
		LO PR	107	114	125	133	113	120	132	140	118	125	137	146	124	124	132	144	153	130	138	150	160	134	143	156	166
800	725	MBh	22.8	23.5	25.4	27.3	22.3	22.9	24.8	26.6	21.7	22.4	24.2	26.0	21.2	21.8	23.6	25.3	20.1	20.7	22.4	24.1	18.7	19.2	20.8	22.3	
		S/T	0.83	0.75	0.57	0.36	0.87	0.77	0.59	0.38	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42	
		ΔT	22	20	16	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	11	21	19	15	11	
		KW	1.28	1.31	1.35	1.40	1.39	1.42	1.47	1.52	1.48	1.52	1.57	1.63	1.57	1.57	1.61	1.66	1.72	1.64	1.68	1.74	1.80	1.70	1.74	1.81	1.87
		Amps	5.6	5.7	5.9	6.1	6.0	6.1	6.3	6.6	6.5	6.7	6.9	7.1	6.9	7.1	7.3	7.6	7.4	7.5	7.8	8.1	7.8	8.0	8.2	8.5	
		HI PR	220	237	250	261	247	266	281	293	281	303	320	333	320	320	345	364	380	360	388	410	427	398	429	453	472
		LO PR	108	115	125	134	114	121	132	141	119	126	138	147	125	125	132	145	154	130	139	152	161	135	144	157	167
900	725	MBh	23.2	23.9	25.9	27.8	22.7	23.4	25.3	27.1	22.2	22.8	24.7	26.5	21.6	22.3	24.1	25.8	20.5	21.1	22.9	24.6	19.0	19.6	21.2	22.7	
		S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.87	0.65	0.42	0.98	0.87	0.66	0.42	
		ΔT	20	19	15	11	20	19	15	11	20	19	15	11	21	19	16	11	20	19	15	11	19	17	14	10	
		KW	1.29	1.32	1.37	1.42	1.40	1.44	1.49	1.54	1.50	1.54	1.59	1.65	1.59	1.59	1.62	1.68	1.74	1.66	1.70	1.76	1.83	1.72	1.77	1.83	1.90
		Amps	5.6	5.8	6.0	6.2	6.1	6.2	6.4	6.6	6.6	6.7	7.0	7.2	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.3	8.6	
		HI PR	223	240	254	265	251	270	285	297	285	307	324	338	325	325	349	369	385	365	393	415	433	403	434	458	478
		LO PR	109	116	127	135	116	123	134	143	120	128	139	149	126	126	134	146	156	132	141	154	163	137	145	159	169
DB: Entering Indoor Dry Bulb Temperature																								kW = Total system power			
High and low pressures are measured at the liquid and suction service valves																								Amps = outdoor unit amps (comp.+fan)			
Shaded area reflects ACCA (TVA) conditions																											

		65												75						85						95						105						115					
		OUTDOOR AMBIENT TEMPERATURE																																									
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71										
725	MBh	22.8	23.3	24.9	26.7	22.3	22.8	24.4	26.0	21.8	22.3	23.8	25.4	21.3	21.7	23.2	24.8	20.2	20.6	22.0	23.6	18.7	19.1	20.4	21.8	18.7	19.1	20.4	21.8	18.7	19.1	20.4	21.8										
	S/T	0.88	0.82	0.67	0.5	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.5	0.96	0.90	0.73	0.55	1.00	0.94	0.76	0.6	1.01	0.94	0.77	0.57	1.01	0.94	0.77	0.57	1.01	0.94	0.77	0.57										
	ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	26	24	21	17	24	23	20	16	24	23	20	16	24	23	20	16										
	kW	1.28	1.31	1.36	1.4	1.39	1.42	1.47	1.53	1.49	1.52	1.58	1.6	1.57	1.61	1.67	1.73	1.65	1.69	1.75	1.8	1.71	1.75	1.81	1.88	1.71	1.75	1.81	1.88	1.71	1.75	1.81	1.88										
	Amps	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.1	7.0	7.1	7.4	7.6	7.4	7.6	7.8	8.1	7.8	8.0	8.3	8.6	7.8	8.0	8.3	8.6	7.8	8.0	8.3	8.6										
800	HI PR	221	238	251	262	248	267	282	294	282	304	321	334	321	346	365	381	362	389	411	429	399	430	454	473	399	430	454	473	399	430	454	473										
	LO PR	108	115	126	134	114	122	133	142	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	135	144	157	167	135	144	157	167										
	MBh	23.2	23.7	25.3	27.1	22.6	23.1	24.7	26.4	22.1	22.6	24.1	25.8	21.6	22.0	23.5	25.2	20.5	20.9	22.4	23.9	19.0	19.4	20.7	22.2	19.0	19.4	20.7	22.2	19.0	19.4	20.7	22.2										
	S/T	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.6	1.00	0.94	0.77	0.57	1.00	0.98	0.80	0.6	1.00	0.99	0.80	0.60	1.00	0.99	0.80	0.60	1.00	0.99	0.80	0.60										
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	24	24	20	16	22	22	19	15	22	22	19	15	22	22	19	15										
80	kW	1.29	1.32	1.37	1.4	1.40	1.43	1.48	1.54	1.50	1.53	1.59	1.6	1.58	1.62	1.68	1.74	1.66	1.70	1.76	1.8	1.72	1.76	1.82	1.89	1.72	1.76	1.82	1.89	1.72	1.76	1.82	1.89										
	Amps	5.6	5.8	5.9	6.1	6.1	6.2	6.4	6.6	6.6	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.6	7.9	8.1	7.9	8.1	8.3	8.6	7.9	8.1	8.3	8.6	7.9	8.1	8.3	8.6										
	HI PR	223	240	253	264	250	269	284	296	284	306	323	337	324	348	368	384	364	392	414	432	402	433	457	477	402	433	457	477	402	433	457	477										
	LO PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169	136	145	158	169	136	145	158	169										
	900	MBh	23.6	24.2	25.8	27.6	23.1	23.6	25.2	27.0	22.5	23.0	24.6	26.3	22.0	22.5	24.0	25.7	20.9	21.4	22.8	24.4	19.4	19.8	21.1	22.6	19.4	19.8	21.1	22.6	19.4	19.8	21.1	22.6									
S/T		0.93	0.87	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.6	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.6	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61										
ΔT		23	22	19	15	23	22	19	15	23	22	19	15	22	22	19	15	21	22	19	15	20	20	18	14	20	20	18	14	20	20	18	14										
kW		1.30	1.33	1.38	1.4	1.42	1.45	1.50	1.55	1.51	1.55	1.61	1.7	1.60	1.64	1.70	1.76	1.68	1.72	1.78	1.8	1.74	1.78	1.85	1.91	1.74	1.78	1.85	1.91	1.74	1.78	1.85	1.91										
Amps		5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.1	7.2	7.5	7.8	7.5	7.7	7.9	8.2	8.0	8.1	8.4	8.7	8.0	8.1	8.4	8.7	8.0	8.1	8.4	8.7										
80	HI PR	226	243	256	267	253	272	288	300	288	310	327	341	328	353	373	389	369	397	419	437	407	438	463	483	407	438	463	483	407	438	463	483										
	LO PR	110	117	128	137	117	124	136	144	121	129	141	150	127	136	148	158	134	142	155	165	138	147	160	171	138	147	160	171	138	147	160	171										

85	725	MBh	23.2	23.7	24.8	26.5	22.7	23.1	24.2	25.9	22.2	22.6	23.7	25.2	21.6	22.0	23.1	24.6	20.5	20.9	21.9	23.4	19.0	19.4	20.3	21.7
		S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75
		ΔT	27	27	25	22	27	27	25	22	27	27	26	22	27	27	26	22	26	27	25	22	24	25	24	20
		kW	1.29	1.32	1.37	1.42	1.40	1.44	1.49	1.54	1.50	1.54	1.59	1.65	1.59	1.63	1.68	1.74	1.66	1.70	1.76	1.83	1.72	1.77	1.83	1.90
		Amps	5.6	5.8	6.0	6.2	6.1	6.2	6.4	6.6	6.6	6.7	7.0	7.2	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.3	8.6
	Hi PR	223	240	254	265	251	270	285	297	285	307	324	338	325	349	369	385	365	393	415	433	403	434	458	478	
	LO PR	109	116	127	135	116	123	134	143	120	128	139	149	126	134	147	156	132	141	154	164	137	145	159	169	
	800	MBh	23.6	24.0	25.2	26.9	23.0	23.5	24.6	26.2	22.5	22.9	24.0	25.6	21.9	22.4	23.4	25.0	20.8	21.3	22.3	23.7	19.3	19.7	20.6	22.0
		S/T	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78
		ΔT	26	26	24	21	26	26	24	21	26	26	25	21	25	26	25	21	24	24	24	21	22	23	23	20
kW		1.30	1.33	1.38	1.43	1.41	1.45	1.50	1.55	1.51	1.55	1.60	1.66	1.60	1.64	1.69	1.76	1.67	1.71	1.77	1.84	1.73	1.78	1.84	1.91	
Amps		5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.2	7.1	7.2	7.5	7.7	7.5	7.7	7.9	8.2	7.9	8.1	8.4	8.7	
Hi PR	225	242	256	267	252	272	287	299	287	309	326	340	327	352	371	387	368	396	418	436	406	437	462	482		
LO PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	148	157	133	142	155	165	138	146	160	170		
900	MBh	24.1	24.5	25.7	27.4	23.5	24.0	25.1	26.8	22.9	23.4	24.5	26.1	22.4	22.8	23.9	25.5	21.3	21.7	22.7	24.2	19.7	20.1	21.0	22.4	
	S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79	
	ΔT	24	24	22	19	24	24	23	20	23	24	23	20	23	23	23	20	22	22	22	19	20	21	21	18	
	kW	1.32	1.35	1.39	1.44	1.43	1.46	1.51	1.57	1.53	1.56	1.62	1.68	1.62	1.65	1.71	1.78	1.69	1.73	1.79	1.86	1.75	1.80	1.86	1.93	
	Amps	5.7	5.9	6.1	6.3	6.2	6.3	6.5	6.8	6.7	6.9	7.1	7.3	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8	
Hi PR	228	245	259	270	256	275	290	303	291	313	330	345	331	356	376	392	372	401	423	441	412	443	468	488		
LO PR	112	119	130	138	118	125	137	146	122	130	142	152	129	137	149	159	135	143	157	167	139	148	162	173		

		OUTDOOR AMBIENT TEMPERATURE												115																							
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175						
		ENTERING INDOOR WET BULB TEMPERATURE																																			
700	MBh	24.7	25.0	25.7	26.8	24.5	24.8	25.5	26.6	23.8	24.2	24.9	26.0	22.7	23.1	23.8	24.9	21.4	21.7	22.5	23.6	20.2	20.5	21.3	22.4	19.0	19.3	20.1	21.2	22.4	23.6	24.8					
	S/T	0.87	0.80	0.67	0.5	1.00	0.80	0.67	0.54	1.00	0.83	0.70	0.6	1.00	0.84	0.72	0.58	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.65	0.9	0.9	1.0	1.1	1.2	1.3	1.4					
	ΔT	29	27	23	20	29	27	23	20	29	27	24	20	29	27	23	20	29	27	23	19	30	28	24	21	27	26	25	24	23	22	21					
	KW	1.41	1.40	1.40	1.4	1.57	1.57	1.57	1.58	1.75	1.75	1.75	1.8	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.2	2.43	2.43	2.43	2.44	2.2	2.2	2.2	2.2	2.2	2.2	2.2					
	Amps	5.3	5.3	5.2	5.3	6.0	6.0	6.0	6.1	6.9	6.8	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0					
800	HI PR	254	255	257	261	293	294	296	301	335	336	338	342	380	381	382	387	428	429	431	435	479	480	482	486	440	441	442	443	444	445	446					
	LO PR	122	123	126	131	129	130	133	139	135	137	140	145	141	142	145	150	146	147	150	156	153	154	157	162	157	158	159	160	161	162	163					
	MBh	25.1	25.5	26.2	27.3	24.9	25.2	26.0	27.1	24.3	24.6	25.3	26.4	23.2	23.5	24.2	25.3	21.8	22.2	22.9	24.0	20.6	21.0	21.7	22.8	19.0	19.3	20.1	21.2	22.4	23.6	24.8					
	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.62	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.69	0.9	0.9	1.0	1.1	1.2	1.3	1.4					
	ΔT	28	26	22	18	28	26	22	18	28	26	23	19	28	26	22	18	28	26	22	18	29	27	23	19	27	26	25	24	23	22	21					
900	KW	1.41	1.41	1.41	1.4	1.58	1.58	1.57	1.59	1.76	1.76	1.76	1.8	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.45	2.2	2.2	2.2	2.2	2.2	2.2	2.2					
	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0					
	HI PR	256	257	259	263	296	297	299	303	337	338	340	344	382	383	385	389	430	431	433	437	481	483	484	489	440	441	442	443	444	445	446					
	LO PR	124	125	128	133	131	133	136	141	138	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164	157	158	159	160	161	162	163					
	MBh	25.7	26.0	26.7	27.8	25.4	25.8	26.5	27.6	24.8	25.2	25.9	27.0	23.7	24.1	24.8	25.9	22.4	22.7	23.5	24.6	21.2	21.5	22.2	23.3	19.0	19.3	20.1	21.2	22.4	23.6	24.8					
900	S/T	1.00	0.84	0.71	0.6	1.00	0.84	0.72	0.58	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.69	0.9	0.9	1.0	1.1	1.2	1.3	1.4					
	ΔT	27	25	21	17	27	25	21	17	27	25	22	18	27	25	21	17	27	25	21	17	28	26	22	18	27	26	25	24	23	22	21					
	KW	1.42	1.42	1.42	1.4	1.58	1.58	1.58	1.59	1.77	1.77	1.76	1.8	1.97	1.97	1.96	1.98	2.19	2.19	2.19	2.2	2.45	2.45	2.45	2.46	2.2	2.2	2.2	2.2	2.2	2.2	2.2					
	Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1	10.0	10.0	10.0	10.0	10.0	10.0	10.1					
	HI PR	259	260	261	266	298	299	301	305	340	341	343	347	384	385	387	392	433	434	435	440	484	485	487	491	440	441	442	443	444	445	446					
900	LO PR	126	128	131	136	134	135	138	143	140	142	145	150	145	147	150	155	151	152	155	160	157	159	162	167	157	158	159	160	161	162	163					

	700	MBh	25.1	25.4	26.1	27.2	24.9	25.2	25.9	27.0	24.2	24.6	25.3	26.4	23.1	23.5	24.2	25.3	21.8	22.2	22.9	24.0	20.6	20.9	21.7	22.8	
		S/T	1.00	0.89	0.76	0.63	1.00	0.90	0.77	0.63	1.00	1.00	0.79	0.66	1.00	1.00	0.81	0.68	1.00	1.00	0.83	0.70	1.00	1.00	1.00	0.75	
		ΔT	33	31	27	24	33	31	27	23	33	31	28	24	33	31	27	23	33	31	27	23	34	32	28	24	
		KW	1.41	1.41	1.40	1.42	1.57	1.57	1.57	1.58	1.76	1.76	1.75	1.76	1.96	1.96	1.95	1.95	1.96	2.18	2.18	2.17	2.19	2.44	2.44	2.43	2.45
		Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.8	6.9	7.8	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0
	800	HI PR	255	256	258	262	295	296	297	302	336	337	339	343	381	382	384	388	429	430	432	436	480	481	483	488	
		LO PR	123	125	128	133	131	132	135	140	137	139	142	147	142	144	147	152	148	149	152	157	154	156	159	164	
		MBh	25.5	25.9	26.6	27.7	25.3	25.6	26.4	27.5	24.7	25.0	25.7	26.8	23.6	23.9	24.7	25.8	22.3	22.6	23.3	24.4	21.0	21.4	22.1	23.2	
		S/T	1.00	0.93	0.80	0.66	1.00	0.93	0.80	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	1.00	0.78	
		ΔT	32	30	26	22	32	30	26	22	32	30	26	23	32	30	26	22	32	30	26	22	33	31	27	23	
	900	KW	1.42	1.42	1.41	1.42	1.58	1.58	1.58	1.59	1.76	1.76	1.76	1.77	1.96	1.96	1.96	1.97	2.19	2.18	2.18	2.19	2.45	2.44	2.44	2.45	
		Amps	5.3	5.3	5.3	5.3	6.1	6.1	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1	
		HI PR	257	258	260	265	297	298	300	304	338	339	341	346	383	384	386	390	431	432	434	438	483	484	485	490	
		LO PR	126	127	130	135	133	134	137	143	139	141	144	149	145	146	149	154	150	151	154	160	157	158	161	166	
		MBh	26.1	26.4	27.1	28.2	25.9	26.2	26.9	28.0	25.2	25.6	26.3	27.4	24.1	24.5	25.2	26.3	22.8	23.1	23.9	25.0	21.6	21.9	22.7	23.8	
		S/T	1.00	0.93	0.81	0.67	1.00	1.00	0.81	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.85	0.72	1.00	1.00	0.87	0.74	1.00	1.00	1.00	0.79	
		ΔT	31	29	25	21	31	29	25	21	31	29	25	22	31	29	25	21	31	29	25	21	32	30	26	22	
		KW	1.42	1.42	1.42	1.43	1.59	1.59	1.58	1.60	1.77	1.77	1.77	1.78	1.97	1.97	1.97	1.98	2.19	2.19	2.19	2.20	2.45	2.45	2.45	2.46	
		Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.9	8.9	8.9	8.9	10.1	10.0	10.0	10.1	
		HI PR	260	261	263	267	299	300	302	307	341	342	344	348	386	387	388	393	434	435	437	441	485	486	488	492	
LO PR	128	130	133	138	136	137	140	145	142	143	146	151	147	149	152	157	153	154	157	162	159	161	164	169			

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																			
				65						75						85						95						105						115					
				ENTERING INDOOR WET BULB TEMPERATURE																																			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71										
80	875	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.4	28.9	29.7	31.1	27.1	27.5	28.4	29.8	25.5	25.9	26.8	28.1	24.0	24.5	25.3	26.7	24.0	24.5	25.3	26.7									
		S/T	1.00	0.77	0.63	0.5	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.54	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.61	1.00	1.00	0.75	0.61									
		ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20	29	27	23	20									
		KW	1.76	1.75	1.75	1.8	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.2	2.41	2.41	2.41	2.42	2.68	2.68	2.67	2.7	2.99	2.99	2.99	3.00	2.99	2.99	2.99	3.00									
	Amps	6.4	6.4	6.3	6.4	7.3	7.3	7.3	7.3	8.3	8.3	8.3	8.3	9.4	9.4	9.4	9.4	10.6	10.6	10.6	10.6	12.0	12.0	12.0	12.1	12.0	12.0	12.0	12.1										
	HI PR	250	251	253	257	290	291	292	297	331	332	334	338	375	376	378	382	423	424	426	430	474	475	477	481	474	475	477	481										
	LO PR	124	126	129	134	132	133	136	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166	156	158	161	166										
	1000	MBh	29.9	30.3	31.1	32.5	29.6	30.0	30.9	32.2	28.8	29.2	30.1	31.5	27.5	27.9	28.8	30.1	25.9	26.3	27.2	28.5	24.4	24.8	25.7	27.1	24.4	24.8	25.7	27.1									
S/T		1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67										
ΔT		27	25	22	18	27	25	21	18	27	25	22	18	27	25	21	18	26	25	21	18	28	26	22	19	28	26	22	19										
KW		1.77	1.76	1.76	1.8	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.2	2.42	2.42	2.42	2.43	2.69	2.69	2.68	2.7	3.00	3.00	3.00	3.01	3.00	3.00	3.00	3.01										
1125	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.6	10.6	10.6	10.7	12.1	12.1	12.0	12.1	12.1	12.1	12.0	12.1										
	HI PR	252	253	255	259	292	293	295	299	333	334	336	340	377	378	380	385	425	426	428	432	476	477	479	484	476	477	479	484										
	LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	160	163	168	158	160	163	168										
	MBh	30.3	30.7	31.6	32.9	30.1	30.5	31.3	32.7	29.3	29.7	30.6	31.9	28.0	28.4	29.3	30.6	26.4	26.8	27.7	29.0	24.9	25.3	26.2	27.5	24.9	25.3	26.2	27.5										
85	875	S/T	1																																				

		OUTDOOR AMBIENT TEMPERATURE																																				
		65						75						85						95						105						115						
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
70		ENTERING INDOOR WET BULB TEMPERATURE																																				
	875	MBh	29.1	29.5	30.4	-	28.8	29.2	30.1	-	28.1	28.5	29.4	-	26.8	27.2	28.0	-	25.2	25.6	26.5	-	23.7	24.1	25.0	-	23.7	24.1	25.0	-	23.7	24.1	25.0	-				
		S/T	0.63	0.55	0.41	-	0.63	0.56	0.42	-	0.66	0.58	0.44	-	0.68	0.60	0.46	-	1.00	0.62	0.48	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-				
		ΔT	20	18	15	-	20	18	15	-	20	19	15	-	20	18	15	-	20	18	15	-	21	19	16	-	21	19	16	-	21	19	16	-				
		KW	1.72	1.72	1.72	-	1.91	1.91	1.91	-	2.13	2.12	2.12	-	2.36	2.35	2.35	-	2.61	2.61	2.61	-	2.92	2.92	2.91	-	2.92	2.92	2.91	-	2.92	2.92	2.91	-				
		Amps	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.0	8.0	-	9.1	9.1	9.1	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-				
		HI PR	244	245	247	-	282	283	285	-	323	324	325	-	366	367	369	-	413	414	416	-	463	464	466	-	463	464	466	-	463	464	466	-				
	LO PR	123	124	127	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-	154	156	159	-					
70		MBh	29.5	29.9	30.8	-	29.2	29.6	30.5	-	28.5	28.9	29.7	-	27.2	27.6	28.4	-	25.6	26.0	26.8	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-				
		S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-				
		ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	15	-	20	18	15	-	20	18	15	-				
		KW	1.73	1.73	1.73	-	1.92	1.92	1.92	-	2.14	2.13	2.13	-	2.37	2.36	2.36	-	2.62	2.62	2.62	-	2.93	2.93	2.92	-	2.93	2.93	2.92	-	2.93	2.93	2.92	-				
		Amps	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.1	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-				
		HI PR	246	247	249	-	284	286	287	-	325	326	328	-	368	369	371	-	415	416	418	-	465	466	468	-	465	466	468	-	465	466	468	-				
		LO PR	124	126	129	-	132	133	136	-	138	140	143	-	144	145	149	-	149	151	154	-	156	158	161	-	156	158	161	-	156	158	161	-				
1125		MBh	29.9	30.3	31.2	-	29.7	30.1	31.0	-	28.9	29.3	30.2	-	27.6	28.0	28.9	-	26.0	26.4	27.3	-	24.6	25.0	25.8	-	24.6	25.0	25.8	-	24.6	25.0	25.8	-				
		S/T	0.73	0.65	0.51	-	0.73	0.65	0.51	-	0.76	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.72	0.58	-	1.00	0.78	0.63	-	1.00	0.78	0.63	-	1.00	0.78	0.63	-				
		ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	14	-	19	17	14	-	19	17	14	-				
		KW	1.74	1.74	1.73	-	1.93	1.93	1.92	-	2.14	2.14	2.14	-	2.37	2.37	2.37	-	2.63	2.63	2.63	-	2.94	2.93	2.93	-	2.94	2.93	2.93	-	2.94	2.93	2.93	-				
		Amps	6.3	6.3	6.3	-	7.2	7.2	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.2	-	10.4	10.4	10.4	-	11.8	11.8	11.7	-	11.8	11.8	11.7	-	11.8	11.8	11.7	-				
		HI PR	248	249	251	-	286	288	289	-	327	328	330	-	370	371	373	-	417	418	420	-	467	468	470	-	467	468	470	-	467	468	470	-				
		LO PR	126	128	131	-	134	135	138	-	140	142	145	-	146	147	151	-	151	153	156	-	158	160	163	-	158	160	163	-	158	160	163	-				
75		875	MBh	29.1	29.5	30.4	31.7	28.9	29.3	30.1	31.5	28.1	28.5	29.4	30.7	26.8	27.2	28.1	29.4	25.2	25.6	26.5	27.8	23.7	24.1	25.0	26.3	23.7	24.1	25.0	26.3	23.7	24.1	25.0	26.3			
		S/T	0.76	0.68	0.54	0.39	0.77	0.69	0.55	0.40	1.00	0.72	0.57	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.52	1.00	1.00	0.67	0.52	1.00	1.00	0.67	0.52				
		ΔT	24	22	19	15	24	22	19	15	25	23	19	16	24	22	19	15	24	22	19	15	25	23	20	16	24	22	19	15	25	23	20	16				
		KW	1.72	1.72	1.71	1.73	1.91	1.91	1.91	1.92	2.12	2.12	2.12	2.13	2.36	2.35	2.35	2.36	2.61	2.61	2.61	2.62	2.92	2.92	2.91	2.93	2.92	2.92	2.91	2.93	2.92	2.91	2.93	2.92	2.91			
		Amps	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.0	8.0	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7				
		HI PR	244	245	247	251	283	284	285	290	323	324	326	330	366	367	369	373	413	414	416	420	463	464	466	470	463	464	466	470	463	464	466	470				
		LO PR	123	124	127	132	130	132	135	140	137	138	141	146	142	144	147	152	148	149	152	157	154	156	159	164	154	156	159	164	154	156	159	164				
		1000	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.5	28.9	29.8	31.1	27.2	27.6	28.4	29.8	25.6	26.0	26.9	28.2	24.1	24.5	25.4	26.7	24.1	24.5	25.4	26.7	24.1	24.5	25.4	26.7			
		S/T	0.82	0.75	0.60	0.46	0.83	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.59	1.00	1.00	0.73	0.59	1.00	1.00	0.73	0.59				
		ΔT	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15	24	22	19	15				
		KW	1.73	1.73	1.72	1.74	1.92	1.92	1.92	1.93	2.13	2.13	2.13	2.14	2.37	2.36	2.36	2.37	2.62	2.62	2.62	2.63	2.93	2.92	2.92	2.94	2.92	2.92	2.91	2.94	2.92	2.92	2.91	2.94	2.92	2.91		
		Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.1	9.2	9.1	9.1	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	11.7	11.7	11.7	11.8	11.7	11.7	11.8	11.7	11.8			
		HI PR	246	247	249	253	285	286	287	292	325	326	328	332	368	369	371	375	415	416	418	422	465	466	468	472	465	466	468	472	465	466	468	472	465	466	468	472
		LO PR	124	126	129	134	132	133	137	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166	156	158	161	166	156	158	161	166	156	158	161	166
1125		MBh	30.0	30.4	31.2	32.6	29.7	30.1	31.0	32.3	28.9	29.3	30.2	31.5	27.6	28.0	28.9	30.2	26.0	26.4	27.3	28.6	24.6	25.0	25.9	27.2	24.6	25.0	25.9	27.2	24.6	25.0	25.9	27.2				
		S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.81	0.67	0.52	1.00	0.83	0.69	0.54	1.00	0.86	0.72	0.57	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62				
		ΔT	22	20	17	13	22	20	17	13	22	21	17	13	22	21	17	13	22	20	17	13	23	21	18	14	23	21	18									

		OUTDOOR AMBIENT TEMPERATURE																																							
		65						75						85						95						105						115									
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203			
80	MBh	29.3	29.7	30.5	31.9	29.0	29.4	30.3	31.6	28.2	28.7	29.5	30.9	26.9	27.3	28.2	29.5	25.3	25.8	26.6	27.9	23.9	24.3	25.2	26.5	23.9	24.3	25.2	26.5	23.9	24.3	25.2	26.5	23.9	24.3	25.2	26.5	23.9	24.3	25.2	26.5
	S/T	1.00	0.81	0.67	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.70	0.6	1.00	0.87	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.80	0.65	1.00	1.00	0.75	0.6	1.00	1.00	0.80	0.65	1.00	1.00	0.80	0.65	1.00	1.00	0.80	0.65
	ΔT	28	27	23	19	28	27	23	19	29	27	23	20	28	27	23	19	28	26	23	19	29	27	24	20	28	26	23	19	29	27	24	20	28	26	23	19	29	27	24	20
	KW	1.72	1.72	1.72	1.7	1.91	1.91	1.91	1.92	2.12	2.12	2.12	2.1	2.36	2.35	2.35	2.37	2.61	2.61	2.61	2.6	2.92	2.92	2.91	2.93	2.61	2.61	2.61	2.6	2.92	2.92	2.91	2.93	2.61	2.61	2.6	2.92	2.92	2.91	2.93	
	Amps	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.1	8.0	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7
	HI PR	245	246	247	252	283	284	286	290	323	324	326	330	367	368	370	374	414	415	416	421	464	465	466	471	414	415	416	421	464	465	466	471	414	415	416	421	464	465	466	471
	LO PR	123	125	128	133	131	132	135	140	137	139	142	147	143	144	147	153	148	150	153	158	155	156	160	165	148	150	153	158	155	156	160	165	148	150	153	158	155	156	160	165
80	MBh	29.6	30.1	30.9	32.3	29.4	29.8	30.7	32.0	28.6	29.0	29.9	31.2	27.3	27.7	28.6	29.9	25.7	26.1	27.0	28.3	24.3	24.7	25.5	26.9	24.3	24.7	25.5	26.9	24.3	24.7	25.5	26.9	24.3	24.7	25.5	26.9	24.3	24.7	25.5	26.9
	S/T	1.00	0.88	0.73	0.6	1.00	0.88	0.74	0.59	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72
	ΔT	27	25	22	18	27	25	22	18	28	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19	27	25	22	18	28	26	23	19	27	25	22	18	28	26	23	19
	KW	1.73	1.73	1.72	1.7	1.92	1.92	1.92	1.93	2.13	2.13	2.13	2.1	2.37	2.36	2.36	2.38	2.62	2.62	2.62	2.6	2.93	2.93	2.92	2.94	2.62	2.62	2.62	2.6	2.93	2.93	2.92	2.94	2.62	2.62	2.6	2.93	2.93	2.92	2.94	
	Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.1	9.2	9.2	9.2	9.1	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	10.3	10.3	10.3	10.4	11.7	11.7	11.7
	HI PR	247	248	249	254	285	286	288	292	325	326	328	332	369	370	372	376	416	417	418	423	466	467	468	473	416	417	418	423	466	467	468	473	416	417	418	423	466	467	468	473
	LO PR	125	126	130	135	132	134	137	142	139	140	144	149	144	146	149	154	150	151	155	160	157	158	161	167	150	151	155	160	157	158	161	167	150	151	155	160	157	158	161	167
1125	MBh	30.1	30.5	31.4	32.7	29.8	30.3	31.1	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	0.94	0.80	0.7	1.00	1.00	0.82	0.67	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.75	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.75	1.00	1.00	0.90	0.75	1.00	1.00	0.90	0.75
	ΔT	26	25	21	17	26	24	21	17	27	25	21	18	26	24	21	17	26	24	21	17	27	25	22	18	26	24	21	17	27	25	22	18	26	24	21	17	27	25	22	18
	KW	1.74	1.74	1.73	1.8	1.93	1.93	1.92	1.94	2.14	2.14	2.14	2.2	2.37	2.37	2.37	2.38	2.63	2.63	2.63	2.6	2.94	2.93	2.93	2.95	2.63	2.63	2.63	2.6	2.94	2.93	2.93	2.95	2.63	2.63	2.6	2.94	2.93	2.93	2.95	
	Amps	6.3	6.3	6.3	6.3	7.2	7.2	7.2	7.1	7.2	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8	10.4	10.4	10.4	10.4	11.8	11.8	11.7
	HI PR	249	250	251	256	287	288	290	294	327	328	330	334	371	372	374	378	418	419	420	425	468	469	470	475	418	419	420	425	468	469	470	475	418	419	420	425	468	469	470	475
	LO PR	127	128	132	137	134	136	139	144	141	142	146	151	146	148	151	156	152	153	157	162	159	160	163	169	152	153	157	162	159	160	163	169	152	153	157	162	159	160	163	169

85	MBh	29.8	30.2	31.0	32.4	29.9	30.3	31.1	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3
	S/T	1.00	0.92	0.78	0.63	1.00	0.92	0.78	0.63	1.00	0.94	0.80	0.7	1.00	1.00	0.82	0.67	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.75	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.75	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.75
	ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	28	24	32	30	27	23	33	31	28	24	32	30	27	23	33	31	28	24
	KW	1.72	1.72	1.72	1.73	1.91	1.91	1.91	1.92	2.13	2.13	2.12	2.14	2.36	2.36	2.36	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.92	2.93	2.62	2.62	2.61	2.63	2.92	2.92	2.92	2.93	2.62	2.62	2.61	2.63	2.92	2.92	2.93	2.93
	Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.1	8.1	8.1	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.7	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.7	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.7

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70		ENTERING INDOOR WET BULB TEMPERATURE																																			
		MBh	34.8	35.3	36.3	-	34.5	35.0	36.0	-	33.6	34.1	35.1	-	32.0	32.5	33.5	-	30.1	30.6	31.6	-	28.4	28.8	29.9	-	28.4	28.8	29.9	-	28.4	28.8	29.9	-			
		S/T	0.59	0.52	0.38	-	0.60	0.52	0.39	-	0.62	0.55	0.42	-	0.64	0.57	0.43	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-	1.00	0.64	0.51	-	1.00	0.64	0.51	-			
		ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-	20	18	15	-			
		KW	2.09	2.09	2.09	-	2.32	2.32	2.32	-	2.58	2.58	2.58	-	2.87	2.86	2.86	-	3.18	3.18	3.17	-	3.55	3.55	3.54	-	3.55	3.55	3.54	-	3.55	3.55	3.54	-			
		Amps	7.6	7.6	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	14.2	14.2	14.2	-	14.2	14.2	14.2	-			
		HI PR	254	255	257	-	294	295	297	-	336	337	339	-	381	382	384	-	430	431	433	-	482	483	485	-	482	483	485	-	482	483	485	-			
	LO PR	121	123	126	-	129	130	133	-	135	137	140	-	141	142	145	-	146	147	151	-	153	154	157	-	153	154	157	-	153	154	157	-				
		MBh	35.3	35.7	36.8	-	34.9	35.4	36.5	-	34.0	34.5	35.6	-	32.5	33.0	34.0	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	28.8	29.3	30.3	-	28.8	29.3	30.3	-			
		S/T	0.65	0.58	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-			
		ΔT	18	16	13	-	18	16	13	-	18	17	13	-	18	16	13	-	18	16	13	-	19	17	14	-	19	17	14	-	19	17	14	-			
		KW	2.10	2.10	2.10	-	2.34	2.33	2.33	-	2.60	2.59	2.59	-	2.88	2.88	2.87	-	3.19	3.19	3.19	-	3.56	3.56	3.55	-	3.56	3.56	3.55	-	3.56	3.56	3.55	-			
		Amps	7.6	7.6	7.6	-	8.7	8.7	8.7	-	9.9	9.9	9.9	-	11.2	11.2	11.1	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-			
		HI PR	256	257	259	-	296	297	299	-	338	339	341	-	384	385	386	-	432	433	435	-	484	485	487	-	484	485	487	-	484	485	487	-			
		LO PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-	154	156	159	-			
		MBh	35.8	36.3	37.3	-	35.5	36.0	37.0	-	34.6	35.1	36.1	-	33.0	33.5	34.5	-	31.1	31.6	32.6	-	29.4	29.9	30.9	-	29.4	29.9	30.9	-	29.4	29.9	30.9	-			
		S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-			
		ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	18	16	13	-	18	16	13	-			
		KW	2.11	2.11	2.11	-	2.35	2.34	2.34	-	2.61	2.60	2.60	-	2.89	2.89	2.88	-	3.20	3.20	3.20	-	3.57	3.57	3.56	-	3.57	3.57	3.56	-	3.57	3.57	3.56	-			
		Amps	7.7	7.7	7.6	-	8.7	8.7	8.7	-	9.9	9.9	9.9	-	11.2	11.2	11.2	-	12.7	12.6	12.6	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-			
		HI PR	258	259	261	-	298	300	301	-	340	342	343	-	386	387	389	-	434	435	437	-	486	488	489	-	486	488	489	-	486	488	489	-			
		LO PR	125	127	130	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-	156	158	161	-	156	158	161	-			
75		MBh	34.8	35.3	36.3	37.9	34.5	35.0	36.0	37.6	33.6	34.1	35.1	36.7	32.0	32.5	33.6	35.2	30.1	30.6	31.7	33.2	28.4	28.9	29.9	31.5	28.4	28.9	29.9	31.5	28.4	28.9	29.9	31.5			
		S/T	0.72	0.64	0.51	0.37	0.72	0.65	0.52	0.38	1.00	0.67	0.54	0.40	1.00	0.69	0.56	0.42	1.00	0.71	0.58	0.44	1.00	0.76	0.63	0.49	1.00	0.76	0.63	0.49	1.00	0.76	0.63	0.49			
		ΔT	23	21	18	15	23	21	18	15	23	22	18	15	23	21	18	15	23	21	18	14	24	22	19	15	24	22	19	15	24	22	19	15			
		KW	2.09	2.09	2.08	2.10	2.32	2.32	2.32	2.33	2.58	2.58	2.58	2.59	2.86	2.86	2.86	2.88	3.18	3.18	3.17	3.19	3.55	3.54	3.54	3.56	3.55	3.54	3.54	3.56	3.55	3.54	3.54	3.56			
		Amps	7.6	7.6	7.5	8.0	8.6	8.6	8.6	8.7	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.2	12.5	12.5	12.5	13.0	14.2	14.2	14.3	14.3	14.2	14.2	14.3	14.2	14.2	14.2	14.3				
		HI PR	254	255	257	262	294	295	297	302	336	337	339	344	382	383	384	389	430	431	433	438	482	484	485	490	482	484	485	490	482	484	485	490			
		LO PR	121	123	126	131	129	130	133	138	135	137	140	145	141	142	145	150	146	147	151	156	153	154	157	162	153	154	157	162	153	154	157	162			
		MBh	35.3	35.8	36.8	38.4	35.0	35.5	36.5	38.1	34.1	34.5	35.6	37.2	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	32.0	28.8	29.3	30.4	32.0	28.8	29.3	30.4	32.0			
		S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55			
		ΔT	22	20	17	14	22	20	17	13	22	20	17	14	22	20	17	13	22	20	17	13	23	21	18	14	23	21	18	14	23	21	18	14			
		KW	2.10	2.10	2.10	2.11	2.33	2.33	2.33	2.35	2.59	2.59	2.59	2.61	2.88	2.87	2.87	2.89	3.19	3.19	3.18	3.20	3.56	3.56	3.55	3.57	3.56	3.56	3.55	3.57	3.56	3.56	3.55	3.57			
		Amps	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.8	10.0	11.2	11.2	11.1	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	14.3	14.3	14.3	14.0	14.3	14.3	14.0	14.0			
		HI PR	256	258	259	264	297	298	299	304	339	340	341	346	384	385	387	391	433	434	435	440	485	486	487	492	485	486	487	492	485	486	487	492			
		LO PR	123	125	128	133	130	132	135	140	137	138	141	147	142	144	147	152	148	149	152	157	154	156	159	164	154	156	159	164	154	156	159	164			
		MBh	35.8	36.3	37.4	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.0	33.5	34.6	36.2	31.1	31.6	32.7	34.2	29.4	29.9	30.9	32.5	29.4	29.9	30.9	32.5	29.4	29.9	30.9	32.5			
		S/T	0.81	0.73	0.60	0.46	0.82	0.74	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.78	0.65	0.51	1.00	0.81	0.67	0.53	1.00	1.00	0.72	0.58	1.00	1.00	0.72	0.58	1.00	1.00	0.72	0.58			
		ΔT	21	19	16	13	21	19	16	13	21	20	16	13	21	19	16	13	21	19	16	12	22	20	17	13	22	20	17	13	22	20	17	13			
		KW	2.11	2.11	2.11	2.12	2.34	2.34	2.34	2.36</																											

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE												105												115		
				85						95						105						115								
				ENTERING INDOOR WET BULB TEMPERATURE												105						115								
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
80	1050	MBh	35.0	35.5	36.5	38.1	34.7	35.2	36.2	37.8	33.8	34.3	35.3	36.9	32.2	32.7	33.7	35.3	30.3	30.8	31.8	33.4	28.6	29.0	30.1	31.7				
		S/T	0.84	0.77	0.63	0.5	1.00	0.80	0.66	0.5	1.00	0.80	0.68	0.54	1.00	0.82	0.68	0.54	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.61				
		ΔT	27	25	22	19	27	25	22	18	27	25	22	19	27	25	22	18	27	25	22	18	28	26	23	19				
		KW	2.09	2.09	2.09	2.1	2.32	2.32	2.32	2.34	2.58	2.58	2.58	2.6	2.86	2.86	2.86	2.88	3.18	3.18	3.17	3.2	3.55	3.55	3.54	3.56				
		Amps	7.6	7.6	7.5	8.0	8.6	8.6	8.6	9.0	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.0				
	1200	HI PR	255	256	258	262	295	296	298	302	337	338	340	344	382	383	385	389	431	432	434	438	483	484	486	490				
		LO PR	122	123	126	132	129	131	134	139	136	137	140	145	141	143	146	151	146	148	151	156	153	155	158	163				
		MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.3	34.2	34.7	35.8	37.4	32.7	33.2	34.2	35.8	30.8	31.2	32.3	33.9	29.0	29.5	30.5	32.1				
		S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67				
		ΔT	26	24	21	17	26	24	21	17	26	24	21	18	26	24	21	17	26	24	21	17	27	25	22	18				
1350	KW	2.10	2.10	2.10	2.1	2.34	2.33	2.33	2.35	2.60	2.59	2.59	2.6	2.88	2.87	2.87	2.89	3.19	3.19	3.19	3.2	3.56	3.56	3.55	3.57					
	Amps	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0					
	HI PR	257	258	260	264	297	298	300	304	339	340	342	346	384	385	387	392	433	434	436	440	485	486	488	492					
	LO PR	124	125	128	133	131	132	136	141	137	139	142	147	143	144	147	153	148	150	153	158	155	156	160	165					
	MBh	36.0	36.5	37.5	39.1	35.7	36.2	37.2	38.8	34.8	35.3	36.3	37.9	33.2	33.7	34.7	36.3	31.3	31.8	32.8	34.4	29.6	30.1	31.1	32.7					
85	1050	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.59	1.00	0.89	0.76	0.6	1.00	1.00	0.77	0.63	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71				
		ΔT	25	23	20	17	25	23	20	17	25	24	20	17	25	23	20	16	25	23	20	16	26	24	21	17				
		KW	2.11	2.11	2.11	2.1	2.35	2.34	2.34	2.36	2.61	2.60	2.60	2.6	2.89	2.89	2.88	2.90	3.20	3.20	3.20	3.2	3.57	3.57	3.56	4.00				
		Amps	7.7	7.7	7.6	8.0	9.0	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.7	12.6	12.6	13.0	14.3	14.3	14.3	14.0				
		HI PR	259	260	262	266	299	300	302	306	341	342	344	348	386	387	389	394	435	436	438	442	487	488	490	494				
	1200	LO PR	126	127	130	135	133	134	138	143	139	141	144	149	145	146	149	155	150	152	155	160	157	158	162	167				
		MBh	35.6	36.1	37.1	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.8	33.3	34.3	35.9	30.9	31.4	32.4	34.0	29.1	29.6	30.7	32.3				
		S/T	1.00	0.86	0.73	0.59	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	1.00	0.71				
		ΔT	31	29	25	22	30	29	25	22	31	29	26	22	30	29	25	22	30	28	25	22	31	30	26	23				
		KW	2.10	2.09	2.09	2.11	2.33	2.33	2.32	2.34	2.59	2.59	2.58	2.60	2.87	2.87	2.86	2.88	3.18	3.18	3.18	3.20	3.55	3.55	3.55	3.56				
1350	Amps	7.6	7.6	7.6	8.0	8.7	8.6	8.6	9.0	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.0	12.6	12.6	12.5	13.0	14.3	14.2	14.2	14.0					
	HI PR	256	257	259	263	296	297	299	303	338	339	341	345	383	384	386	391	432	433	435	439	484	485	487	491					
	LO PR	124	125	128	133	131	133	136	141	137	139	142	147	143	144	148	153	148	150	153	158	155	157	160	165					
	MBh	36.0	36.5	37.6	39.2	35.7	36.2	37.3	38.8	34.8	35.3	36.3	37.9	33.3	33.7	34.8	36.4	31.3	31.8	32.9	34.5	29.6	30.1	31.1	32.7					
	S/T	1.00	0.92	0.79	0.65	1.00	0.93	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77					
1350	ΔT	29	28	24	21	29	28	24	21	30	28	25	21	29	28	24	21	29	27	24	21	30	28	25	22					
	KW	2.11	2.11	2.10	2.12	2.34	2.34	2.33	2.35	2.60	2.60	2.59	2.61	2.88	2.88	2.88	2.89	3.20	3.19	3.19	3.21	3.56	3.56	3.56	3.58					
	Amps	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0					
	HI PR	258	259	261	265	298	299	301	306	340	341	343	348	385	387	388	393	434	435	437	442	486	487	489	494					
	LO PR	125	127	130	135	133	134	137	143	139	141	144	149	145	146	149	154	150	152	155	160	157	158	161	167					
1350	MBh	36.6	37.1	38.1	39.7	36.3	36.8	37.8	39.4	35.4	35.9	36.9	38.5	33.8	34.3	35.3	36.9	31.9	32.4	33.4	35.0	30.1	30.6	31.7	33.3					
	S/T	1.00	0.96	0.82	0.68	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.89	0.76	1.00	1.00	1.00	0.81					
	ΔT	29	27	23	20	29	27	23	20	29	27	24	20	28	27	23	20	28	26	23	20	29	28	24	21					
	KW	2.12	2.12	2.11	2.13	2.35	2.35	2.34	2.36	2.61	2.61	2.60	2.62	2.89	2.89	2.89	2.90	3.21	3.20	3.20	3.22	3.57	3.57	3.57	3.59					
	Amps	7.7	7.7	7.7	8.0	8.8	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.7	12.7	12.6	13.0	14.4	14.3	14.3	14.0					
1350	HI PR	260	261	263	268	300	301	303	308	342	343	345	350	388	389	390	395	436	437	439	444	488	489	491	496					
	LO PR	127	129	132	137	135	136	139	145	141	143	146	151	147	148	151	156	152	154	157	162	159	160	163	169					
	Shaded area reflects AHRI conditions																						kW = Total system power							
	DB: Entering Indoor Dry Bulb Temperature																													
	High and low pressures are measured at the liquid and suction service valves.																													
Amps = outdoor unit amps (comp.+fan)																														

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65				75				85				95				105				115			
				ENTERING INDOOR WET BULB TEMPERATURE																							
70	1100	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		S/T	35.0	35.5	36.6	-	34.7	35.2	36.3	-	33.8	34.3	35.4	-	32.3	32.8	33.8	-	30.4	30.9	31.9	-	28.6	29.1	30.2	-	
		ΔT	0.66	0.59	0.45	-	0.67	0.59	0.46	-	0.70	0.62	0.48	-	0.71	0.64	0.50	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	19	18	14	-	19	17	14	-	20	19	15	-	
		KW	2.03	2.03	2.02	-	2.26	2.26	2.26	-	2.53	2.53	2.52	-	2.81	2.81	2.81	-	3.13	3.13	3.13	-	3.51	3.50	3.50	-	
	1200	Amps	7.4	7.4	7.4	-	8.5	8.5	8.5	-	9.7	9.7	9.7	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	
		HI PR	255	256	258	-	295	296	298	-	337	338	340	-	382	383	385	-	430	431	433	-	482	483	485	-	
		LO PR	122	123	126	-	129	130	134	-	135	137	140	-	141	142	145	-	146	148	151	-	153	154	157	-	
		1350	MBh	35.4	35.9	37.0	-	35.1	35.6	36.6	-	34.2	34.7	35.7	-	32.7	33.2	34.2	-	30.8	31.3	32.3	-	29.0	29.5	30.6	-
			S/T	0.69	0.62	0.48	-	0.70	0.62	0.49	-	0.72	0.65	0.51	-	0.74	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-
ΔT	19		17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-		
KW	2.04		2.03	2.03	-	2.27	2.27	2.27	-	2.54	2.53	2.53	-	2.82	2.82	2.82	-	3.14	3.14	3.13	-	3.51	3.51	3.51	-		
Amps	7.5		7.5	7.5	-	8.6	8.6	8.5	-	9.8	9.8	9.7	-	11.1	11.1	11.0	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-		
75	1100	HI PR	257	258	259	-	296	298	299	-	338	339	341	-	383	384	386	-	432	433	435	-	484	485	486	-	
		LO PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	147	149	152	-	154	156	159	-	
		MBh	36.1	36.6	37.6	-	35.8	36.3	37.3	-	34.9	35.4	36.4	-	33.4	33.8	34.9	-	31.5	31.9	33.0	-	29.7	30.2	31.2	-	
		S/T	0.71	0.63	0.50	-	0.71	0.64	0.50	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	
	1350	KW	2.05	2.04	2.04	-	2.28	2.28	2.28	-	2.55	2.54	2.54	-	2.83	2.83	2.83	-	3.15	3.15	3.14	-	3.52	3.52	3.52	-	
		Amps	7.5	7.5	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	
		HI PR	259	260	262	-	299	300	302	-	341	342	343	-	386	387	388	-	434	435	437	-	486	487	489	-	
		LO PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	151	154	-	156	158	161	-	
		75	1100	MBh	35.1	35.6	36.6	38.2	34.8	35.2	36.3	37.9	33.9	34.3	35.4	37.0	32.3	32.8	33.8	35.4	30.4	30.9	31.9	33.5	28.7	29.2	30.2
S/T	0.79			0.72	0.58	0.44	0.80	0.72	0.59	0.45	1.00	0.75	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.79	0.65	0.51	1.00	0.84	0.71	0.56	
ΔT	24			22	18	15	24	22	18	15	24	22	18	15	24	22	18	14	23	22	18	14	25	23	19	15	
KW	2.03			2.02	2.02	2.04	2.26	2.26	2.26	2.28	2.53	2.52	2.52	2.54	2.81	2.81	2.81	2.82	3.13	3.13	3.12	3.14	3.50	3.50	3.50	3.52	
Amps	7.4			7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	11.0	11.0	11.1	12.5	12.5	12.5	12.5	14.2	14.2	14.2	14.3	
1200	HI PR		255	256	258	263	295	296	298	302	337	338	340	344	382	383	385	389	430	432	433	438	482	483	485	490	
	LO PR		122	123	126	131	129	130	134	139	135	137	140	145	141	142	145	150	146	148	151	156	153	154	157	162	
	MBh		35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.2	34.2	34.7	35.8	37.3	32.7	33.2	34.2	35.8	30.8	31.3	32.3	33.9	29.1	29.5	30.6	32.2	
	S/T		0.82	0.74	0.61	0.47	0.83	0.75	0.61	0.47	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	0.82	0.68	0.54	1.00	1.00	0.73	0.59	
	ΔT		23	21	18	14	23	21	17	14	23	21	18	14	23	21	17	14	23	21	17	14	24	22	18	15	
1350	KW	2.03	2.03	2.03	2.05	2.27	2.27	2.26	2.28	2.53	2.53	2.53	2.55	2.82	2.82	2.81	2.83	3.14	3.14	3.13	3.15	3.51	3.51	3.51	3.52		
	Amps	7.5	7.5	7.4	7.5	8.6	8.5	8.5	8.6	9.8	9.8	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3		
	HI PR	257	258	260	264	297	298	300	304	338	340	341	346	383	385	386	391	432	433	435	439	484	485	487	491		
	LO PR	123	125	128	133	130	132	135	140	137	138	141	146	142	144	147	152	147	149	152	157	154	156	159	164		
	MBh	36.1	36.6	37.7	39.2	35.8	36.3	37.4	38.9	34.9	35.4	36.4	38.0	33.4	33.9	34.9	36.5	31.5	32.0	33.0	34.6	29.7	30.2	31.3	32.8		
1350	S/T	0.84	0.76	0.63	0.48	0.84	0.77	0.63	0.49	1.00	0.79	0.66	0.51	1.00	0.81	0.68	0.53	1.00	0.83	0.70	0.56	1.00	1.00	0.75	0.61		
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14		
	KW	2.04	2.04	2.04	2.06	2.28	2.28	2.27	2.29	2.54	2.54	2.54	2.56	2.83	2.83	2.82	2.84	3.15	3.15	3.14	3.16	3.52	3.52	3.52	3.53		
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.5	12.6	14.3	14.3	14.3	14.3		
	HI PR	259	260	262	266	299	300	302	306	341	342	344	348	386	387	389	393	434	435	437	442	486	487	489	493		
LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	154	150	151	154	159	156	158	161	166			
Shaded area reflects ACCA (TVA) conditions																								kW = Total system power			
DB: Entering Indoor Dry Bulb Temperature																								Amps = outdoor unit amps (comp.+fan)			
High and low pressures are measured at the liquid and suction service valves.																											

		OUTDOOR AMBIENT TEMPERATURE																																								
		65						75						85						95						105						115										
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203				
		ENTERING INDOOR WET BULB TEMPERATURE																																								
80	1100	35.2	35.7	36.8	38.3	34.9	35.4	36.5	38.0	34.0	34.5	35.6	37.1	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	31.9	28.8	29.3	30.4	31.9	28.8	29.3	30.4	31.9	28.8	29.3	30.4	31.9	28.8	29.3	30.4	31.9	
	MBh	0.92	0.84	0.71	0.6	1.00	0.85	0.71	0.57	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.61	1.00	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.69	1.00	1.00	0.83	0.69	1.00	1.00	0.83	0.69	1.00	1.00	0.83	0.69	1.00	1.00	0.83	0.69
	ΔT	28	26	23	19	28	26	22	19	28	26	23	19	28	26	22	19	28	26	22	18	29	27	23	20	29	27	23	20	29	27	23	20	29	27	23	20	29	27	23	20	
	KW	2.03	2.03	2.02	2.0	2.26	2.26	2.26	2.28	2.53	2.53	2.52	2.5	2.81	2.81	2.81	2.83	3.13	3.13	3.13	3.13	3.1	3.51	3.50	3.52	14.2	14.2	14.2	14.3	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.3	
	Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	11.0	11.0	11.1	12.5	12.5	12.5	12.5	12.6	14.2	14.2	14.3	483	484	486	490	483	484	486	490	483	484	486	490	483	484	486	490	
	HI PR	256	257	259	263	296	297	298	303	337	339	340	345	382	384	385	390	431	432	434	438	483	484	486	490	483	484	486	490	483	484	486	490	483	484	486	490	483	484	486	490	
	LO PR	122	124	127	132	130	131	134	139	136	137	140	146	141	143	146	151	147	148	151	156	153	155	158	163	157	159	162	167	164	169	171	173	175	177	179	181	183	185	187		
80	1200	35.6	36.1	37.2	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.9	33.4	34.4	36.0	31.0	31.5	32.5	34.1	29.2	29.7	30.8	32.3	29.2	29.7	30.8	32.3	29.2	29.7	30.8	32.3	29.2	29.7	30.8	32.3	29.2	29.7	30.8	32.3	
	MBh	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72	
	ΔT	27	25	22	18	27	25	22	18	27	26	22	18	27	25	22	18	27	25	21	18	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	
	KW	2.04	2.03	2.03	2.1	2.27	2.27	2.27	2.28	2.54	2.53	2.53	2.6	2.82	2.82	2.81	2.83	3.14	3.14	3.13	3.2	3.51	3.51	3.51	3.53	14.2	14.2	14.2	14.3	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.3	
	Amps	7.5	7.5	7.5	7.5	8.6	8.6	8.6	8.6	9.8	9.8	9.7	9.8	11.1	11.1	11.1	11.1	12.5	12.5	12.5	12.5	12.6	14.2	14.2	14.3	484	485	487	492	484	485	487	492	484	485	487	492	484	485	487	492	
	HI PR	257	258	260	265	297	298	300	304	339	340	342	346	384	385	387	391	432	434	435	440	484	485	487	492	484	485	487	492	484	485	487	492	484	485	487	492	484	485	487	492	
	LO PR	124	125	128	133	131	132	135	141	137	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164	157	159	162	167	164	169	171	173	175	177	179	181	183	185	187		
1350	1100	36.3	36.8	37.8	39.4	36.0	36.5	37.5	39.1	35.1	35.6	36.6	38.2	33.6	34.0	35.1	36.7	31.7	32.1	33.2	34.8	29.9	30.4	31.4	33.0	29.9	30.4	31.4	33.0	29.9	30.4	31.4	33.0	29.9	30.4	31.4	33.0	29.9	30.4	31.4	33.0	
	MBh	1.00	0.89	0.75	0.6	1.00	0.89	0.76	0.61	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.7	1.00	1.00	0.88	0.73	1.00	1.00	0.88	0.73	1.00	1.00	0.88	0.73	1.00	1.00	0.88	0.73	1.00	1.00	0.88	0.73	
	ΔT	26	24	21	17	26	24	21	17	27	25	21	17	26	24	21	17	26	24	20	17	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	
	KW	2.05	2.04	2.04	2.1	2.28	2.28	2.28	2.29	2.55	2.54	2.54	2.6	2.83	2.83	2.83	2.84	3.15	3.15	3.14	3.2	3.52	3.52	3.52	3.54	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.6	12.6	14.3	14.3	14.3	487	488	489	494	487	488	489	494	487	488	489	494	487	488	489	494	
	HI PR	260	261	262	267	299	301	302	307	341	342	344	349	386	387	389	394	435	436	438	442	487	488	489	494	487	488	489	494	487	488	489	494	487	488	489	494	487	488	489	494	
	LO PR	126	127	131	136	133	135	138	143	140	141	144	149	145	147	150	155	150	152	155	160	157	159	162	167	157	159	162	167	164	169	171	173	175	177	179	181	183	185	187		

85	1100	MBh	35.8	36.3	37.3	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.1	33.5	34.6	36.2	31.2	31.7	32.7	34.3	29.4	29.9	30.9	32.5
		S/T	1.00	0.94	0.81	0.67	1.00	0.95	0.81	0.67	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	1.00	0.79
		ΔT	32	30	26	23	32	30	26	23	32	30	26	23	32	30	26	22	31	30	26	22	33	31	27	23
		KW	2.03	2.03	2.03	2.04	2.27	2.27	2.26	2.28	2.53	2.53	2.53	2.54	2.82	2.82	2.81	2.83	3.14	3.13	3.13	3.15	3.51	3.51	3.50	3.52
		Amps	7.5	7.5	7.4	7.5	8.5	8.5	8.5	8.6	9.8	9.7	9.7	9.8	11.1	11.1	11.1	11.1	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2
1200	MBh	36.2	36.7	37.7	39.3	35.9	36.4	37.4	39.0	35.0	35.5	36.5	38.1	33.4	33.9	35.0	36.5	31.5	32.0	33.1	34.6	29.8	30.3	31.3	32.9	
	S/T	1.00	0.97	0.83	0.69	1.00	0.98	0.84	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	1.00	0.82	
	ΔT	31	29	26	22	31	29	25	22	31	29	26	22	31	29	25	22	31	29	25	22	32	30	26	23	
	KW	2.04	2.04	2.03	2.05	2.28	2.27	2.27	2.29	2.54	2.54	2.53	2.55	2.83	2.82	2.82	2.84	3.14	3.14	3.14	3.16	3.52	3.52	3.51	3.53	
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.6	9.8	9.8	9.8	9.8	11.1	11.1	11.1	11.1	11.2	12.6	12.5	12.5	12.6	14.3	14.3	14.2	14.3
1350	MBh	36.9	37.4	38.4	40.0	36.6	37.1	38.1	39.7	35.7	36.2	37.2	38.8	34.1	34.6	35.7	37.2	32.2	32.7	33.8	35.3	30.5	31.0	32.0	33.6	
	S/T	1.00	0.99	0.85	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.92	0.78	1.00	1.00	1.00	0.83	
	ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	25	22	
	KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54	
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4
85	1200	MBh	26.1	26.2	26.4	26.8	30.1	30.2	30.4	30.8	34.2	34.4	34.5	35.0	38.7	38.9	39.0	39.5	43.6	43.7	43.9	44.3	48.8	48.9	49.1	49.5
		S/T	1.00	0.99	0.97	0.95	1.00	1.00	0.99	0.97	1.00	1.00	0.98	0.95	1.00	1.00	0.97	0.94	1.00	1.00	0.97	0.94	1.00	1.00	1.00	0.97
		ΔT	30	29	28	27	32	32	32	32	37	37	37	37	42	42	42	42	47	47	47	47	52	52	52	52
		KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54
		Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3
1350	MBh	26.9	27.0	27.1	27.2	30.3	30.4	30.5	30.6	34.3	34.4	34.5	35.0	38.8	38.9	39.0	39.5	43.7	43.8	43.9	44.3	48.9	49.0	49.1	49.5	
	S/T	1.00	0.99	0.98	0.97	1.00	1.00	0.99	0.98	1.00	1.00	0.99	0.97	1.00	1.00	0.98	0.95	1.00	1.00	0.98	0.95	1.00	1.00	1.00	0.97	
	ΔT	30	29	28	27	32	32	32	32	37	37	37	37	42	42	42	42	47	47	47	47	52	52	52	52	
	KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54	
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4
85	1200	MBh	26.9	27.0	27.1	27.2	30.3	30.4	30.5	30.6	34.3	34.4	34.5	35.0	38.8	38.9	39.0	39.5	43.7	43.8	43.9	44.3	48.9	49.0	49.1	49.5
		S/T	1.00	0.99	0.98	0.97	1.00	1.00	0.99	0.98	1.00	1.00	0.99	0.97	1.00	1.00	0.98	0.95	1.00	1.00	0.98	0.95	1.00	1.00	1.00	0.97
		ΔT	30	29	28	27	32	32	32	32	37	37	37	37	42	42	42	42	47	47	47	47	52	52	52	52
		KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54
		Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3
1350	MBh	26.9	27.0	27.1	27.2	30.3	30.4	30.5	30.6	34.3	34.4	34.5	35.0	38.8	38.9	39.0	39.5	43.7	43.8	43.9	44.3	48.9	49.0	49.1	49.5	
	S/T	1.00	0.99	0.98	0.97	1.00	1.00	0.99	0.98	1.00	1.00	0.99	0.97	1.00	1.00	0.98	0.95	1.00	1.00	0.98	0.95	1.00	1.00	1.00	0.97	
	ΔT	30	29	28	27	32	32	32	32	37	37	37	37	42	42	42	42	47	47	47	47	52	52	52	52	
	KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54	
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4
85	1200	MBh	26.9	27.0	27.1	27.2	30.3	30.4	30.5	30.6	34.3	34.4	34.5	35.0	38.8	38.9	39.0	39.5	43.7	43.8	43.9	44.3	48.9	49.0	49.1	49.5
		S/T	1.00	0.99	0.98	0.97	1.00	1.00	0.99	0.98	1.00	1.00	0.99	0.97	1.00	1.00	0.98	0.95	1.00	1.00	0.98	0.95	1.00	1.00	1.00	0.97
		ΔT	30	29	28	27	32	32	32	32	37	37	37	37	42	42	42	42	47	47	47	47	52	52	52	52
		KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54
		Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3
1350	MBh	26.9	27.0	27.1	27.2	30.3	30.4	30.5	30.6	34.3	34.4	34.5	35.0	38.8	38.9	39.0	39.5	43.7	43.8	43.9	44.3	48.9	49.0	49.1	49.5	
	S/T	1.00	0.99	0.98	0.97	1.00	1.00	0.99	0.98	1.00	1.00	0.99	0.97	1.00	1.00	0.98	0.95	1.00	1.00	0.98	0.95	1.00	1.00	1.00	0.97	
	ΔT	30	29	28	27	32	32	32	32	37	37	37	37	42	42	42	42	47	47	47	47	52	52	52	52	
	KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54	
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4
85	1200	MBh	26.9	27.0	27.1	27.2	30.3	30.4	30.5	30.6	34.3	34.4	34.5	35.0	38.8	38.9	39.0	39.5	43.7	43.8	43.9	44.3	48.9	49.0	49.1	49.5
		S/T	1.00	0.99	0.98	0.97	1.00	1.00	0.99	0.98	1.00	1.00	0.99	0.97	1.00	1.00	0.98	0.95	1.00	1.00	0.98	0.95	1.00	1.00	1.00	0.97
		ΔT	30	29	28	27	32	32	32	32	37	37	37	37	42	42	42	42	47	47	47	47	52	52	52	52
		KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54
		Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3
1350	MBh	26.9	27.0	27.1	27.2	30.3	30.4	30.5	30.6	34.3	34.4	34.5	35.0	38.8	38.9	39.0	39.5	43.7	43.8	43.9	44.3	48.9	49.0	49.1	49.5	
	S/T	1.00	0.99	0.98	0.97	1.00	1.00	0.99	0.98	1.00	1.00	0.99	0.97	1.00	1.00	0.98	0.95	1.00	1.00	0.98	0.95	1.00	1.00	1.00	0.97	
	ΔT	30	29	28	27	32	32	32	32	37	37	37	37	42	42	42	42	47	47	47	47	52	52	52	52	
	KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54	
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4
85	1200	MBh	26.9	27.0	27.1	27.2	30.3	30.4	30.5	30.6	34.3	34.4	34.5	35.0	38.8	38.9	39.0	39.5	43.7	43.8	43.9	44.3	48.9	49.0	49.1	49.5
		S/T	1.00	0.99	0.98	0.97	1.00	1.00</																		

		65						75						85						95						105						115					
		OUTDOOR AMBIENT TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	39.7	40.2	41.4	-	39.3	39.9	41.1	-	38.3	38.8	40.0	-	36.5	37.1	38.2	-	34.3	34.9	36.1	-	32.3	32.9	34.1	-	32.3	32.9	34.1	-	32.3	32.9	34.1	-				
	S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-				
	ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-	21	19	15	-	21	19	15	-				
	KW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.88	-	3.21	3.21	3.21	-	3.58	3.57	3.57	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-				
	Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.9	10.9	10.9	-	12.4	12.4	12.3	-	14.0	14.0	14.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-				
	HI PR	264	266	267	-	306	307	309	-	350	351	353	-	397	398	400	-	448	449	451	-	502	503	505	-	502	503	505	-	502	503	505	-				
	LO PR	126	128	131	-	134	135	139	-	140	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-	159	160	163	-	159	160	163	-				
1400	MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-				
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-				
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-				
	KW	2.34	2.33	2.33	-	2.60	2.60	2.60	-	2.90	2.90	2.90	-	3.23	3.23	3.22	-	3.59	3.59	3.58	-	4.02	4.01	4.01	-	4.02	4.01	4.01	-	4.02	4.01	4.01	-				
	Amps	8.4	8.3	8.3	-	9.6	9.6	9.6	-	11.0	10.9	10.9	-	12.4	12.4	12.4	-	14.1	14.1	14.1	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-				
	HI PR	267	268	270	-	308	309	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-	504	505	507	-	504	505	507	-				
	LO PR	128	130	133	-	136	137	140	-	142	144	147	-	148	150	153	-	154	155	158	-	161	162	165	-	161	162	165	-	161	162	165	-				
1575	MBh	40.8	41.4	42.6	-	40.5	41.0	42.2	-	39.4	40.0	41.2	-	37.7	38.2	39.4	-	35.5	36.0	37.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-				
	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.58	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-				
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-				
	KW	2.35	2.34	2.34	-	2.62	2.61	2.61	-	2.92	2.91	2.91	-	3.24	3.24	3.23	-	3.60	3.60	3.60	-	4.03	4.03	4.02	-	4.03	4.03	4.02	-	4.03	4.03	4.02	-				
	Amps	8.4	8.4	8.4	-	9.6	9.6	9.6	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.1	14.1	-	16.1	16.1	16.1	-	16.1	16.1	16.1	-	16.1	16.1	16.1	-				
	HI PR	269	270	272	-	311	312	314	-	354	355	357	-	401	402	404	-	452	453	455	-	506	507	509	-	506	507	509	-	506	507	509	-				
	LO PR	130	132	135	-	138	139	142	-	144	146	149	-	150	152	155	-	156	157	160	-	163	164	167	-	163	164	167	-	163	164	167	-				
75	MBh	39.7	40.3	41.4	43.3	39.3	39.9	41.1	42.9	38.3	38.9	40.1	41.9	36.5	37.1	38.3	40.1	34.3	34.9	36.1	37.9	32.4	32.9	34.1	35.9	32.4	32.9	34.1	35.9	32.4	32.9	34.1	35.9				
	S/T	0.77	0.69	0.55	0.40	1.00	0.69	0.55	0.40	1.00	0.72	0.58	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53				
	ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	15	24	22	18	15	25	23	19	16	24	22	18	15	25	23	19	16				
	KW	2.32	2.32	2.31	2.33	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.90	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.59	4.00	4.00	3.99	4.01	4.00	4.00	3.99	4.00	4.00	3.99	4.01					
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	9.6	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.4	14.0	14.0	14.0	14.0	16.0	16.0	15.9	16.0	16.0	16.0	15.9	16.0	16.0	15.9	16.0					
	HI PR	265	266	268	272	306	307	309	314	350	351	353	358	397	398	400	405	448	449	451	455	502	503	505	510	502	503	505	510	502	503	505	510				
	LO PR	126	128	131	136	134	135	139	144	141	142	145	151	146	148	151	156	152	153	157	162	159	160	164	169	159	160	164	169	159	160	164	169				
	1400	MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	37.6	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4			
		S/T	0.83	0.75	0.61	0.46	1.00	0.76	0.61	0.47	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	1.00	0.68	0.53	1.00	1.00	0.74	0.59	1.00	1.00	0.74	0.59	1.00	1.00	0.74	0.59			
		ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	22	21	17	14	24	22	18	15	24	22	18	15	24	22	18	15			
		KW	2.33	2.33	2.33	2.35	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.92	3.23	3.22	3.22	3.24	3.59	3.59	3.58	3.60	4.01	4.01	4.01	4.03	4.01	4.01	4.01	4.03	4.01	4.01	4.03				
		Amps	8.3	8.3	8.3	8.0	9.6	9.6	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1	16.0	16.0	16.0	16.0	16.0	16.0	16.1				
		HI PR	267	268	270	274	309	310	312	316	352	353	355	360	399	400	402	407	450	451	453	458	504	505	507	512	504	505	507	512	504	505	507	512			
LO PR		128	130	133	138	136	137	140	146	142	144	147	153	148	150	153	158	154	155	158	164	161	162	165	171	161	162	165	171	161	162	165	171				
1575	MBh	40.8	41.4	42.6	44.4	40.5	41.1	42.2	44.0	39.5	40.0	41.2	43.0	37.7	38.2	39.4	41.2	35.5	36.1	37.2	39.1	33.5	34.1	35.3	37.1	33.5	34.1	35.3	37.1	33.5	34.1	35.3	37.1				
	S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.72	0.57	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62				
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	21	20	16	13	23	21	17	14	23	21	17	14	23	21	17	14				
	KW	2.35	2.34	2.34	2.36	2.61	2.61	2.61	2.63	2.91	2.91	2.91	2.93	3.24	3.23	3.23	3.25	3.60	3.60	3.59	3.61	4.03	4.02	4.02	4.04	4.03	4.02	4.02	4.0								

		OUTDOOR AMBIENT TEMPERATURE																																					
		65						75						85						95						105						115							
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195			
		ENTERING INDOOR WET BULB TEMPERATURE																																					
1225	MBh	39.9	40.5	41.7	43.5	39.6	40.1	41.3	43.1	38.5	39.1	40.3	42.1	36.7	37.3	38.5	40.3	34.6	35.1	36.3	38.1	32.6	33.1	34.3	36.1	30.0	30.5	31.7	33.5	35.3	37.1	38.9	40.7	42.5	44.3	46.1	47.9	49.7	
	S/T	1.00	0.82	0.68	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.71	0.6	1.00	1.00	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.81	0.66	0.5	0.4	0.3	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0			
	ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20	17	15	13	11	9	7	5	3	1	0	0	0		
	KW	2.32	2.32	2.31	2.3	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.9	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.6	4.00	4.00	4.00	4.02	3.6	3.5	3.4	3.3	3.2	3.1	3.0	2.9	2.8	2.7	2.6	2.5		
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.0	14.0	14.0	14.0	16.0	16.0	16.0	16.0	14.0	13.8	13.6	13.4	13.2	13.0	12.8	12.6	12.4	12.2	12.0	11.8		
1400	HI PR	265	266	268	273	307	308	310	314	351	352	354	358	398	399	401	405	448	449	451	456	502	504	505	510	548	549	551	553	555	557	559	561	563	565	567	569		
	LO PR	127	128	131	137	134	136	139	144	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169	164	165	166	167	168	169	170	171	172	173	174			
	MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	39.0	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6	30.0	30.5	31.7	33.5	35.3	37.1	38.9	40.7	42.5	44.3	46.1	47.9		
	S/T	1.00	0.88	0.74	0.6	1.00	0.89	0.74	0.60	1.00	0.91	0.77	0.6	1.00	1.00	0.73	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.87	0.72	0.5	0.4	0.3	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	21	18	26	25	21	18	28	26	22	19	17	15	13	11	9	7	5	3	1	0	0	0		
1575	KW	2.33	2.33	2.33	2.4	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.9	3.23	3.23	3.23	3.24	3.59	3.59	3.58	3.6	4.02	4.01	4.01	4.03	3.6	3.5	3.4	3.3	3.2	3.1	3.0	2.9	2.8	2.7	2.6	2.5		
	Amps	8.4	8.3	8.3	8.0	9.6	9.6	9.6	10.0	11.0	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1	14.0	13.8	13.6	13.4	13.2	13.0	12.8	12.6	12.4	12.2	12.0	11.8		
	HI PR	267	268	270	275	309	310	312	317	353	354	356	360	400	401	403	407	451	452	454	458	505	506	508	512	550	551	553	555	557	559	561	563	565	567	569			
	LO PR	129	130	133	139	136	138	141	146	143	144	148	153	149	150	153	159	154	156	159	164	161	163	166	171	166	167	168	169	170	171	172	173	174	175	176			
	MBh	41.1	41.6	42.8	44.6	40.7	41.3	42.4	44.3	39.7	40.2	41.4	43.2	37.9	38.4	39.6	41.4	35.7	36.3	37.4	39.3	33.7	34.3	35.5	37.3	30.0	30.5	31.7	33.5	35.3	37.1	38.9	40.7	42.5	44.3	46.1	47.9		
1575	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.7	1.00	1.00	0.75	0.6	0.5	0.4	0.3	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18	16	14	12	10	8	6	4	2	0	0	0	0		
	KW	2.35	2.34	2.34	2.4	2.62	2.61	2.61	2.63	2.92	2.91	2.91	2.9	3.24	3.24	3.23	3.25	3.60	3.60	3.60	3.6	4.03	4.03	4.02	4.00	3.6	3.5	3.4	3.3	3.2	3.1	3.0	2.9	2.8	2.7	2.6	2.5		
	Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.1	14.1	14.0	16.1	16.1	16.1	16.2	14.0	13.8	13.6	13.4	13.2	13.0	12.8	12.6	12.4	12.2	12.0	11.8		
	HI PR	270	271	273	277	311	312	314	319	355	356	358	363	402	403	405	410	453	454	456	460	507	508	510	514	552	553	555	557	559	561	563	565	567	569	571	573		
LO PR	131	132	135	141	138	140	143	148	145	147	150	155	151	152	155	161	156	158	161	166	163	165	168	173	168	169	170	171	172	173	174	175	176	177	178	179			

85	1225	MBh	40.6	41.1	42.3	44.1	40.2	40.8	42.0	43.8	39.2	39.7	40.9	42.7	37.4	38.0	39.1	41.0	35.2	35.8	37.0	38.8	33.2	33.8	35.0	36.8
		S/T	1.00	0.92	0.78	0.63	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	1.00	0.71	1.00	1.00	1.00	0.76
		ΔT	31	30	26	23	31	30	26	23	32	30	26	23	31	30	26	23	31	29	26	22	32	30	27	24
		KW	2.33	2.32	2.32	2.34	2.59	2.59	2.59	2.61	2.89	2.89	2.89	2.91	3.22	3.22	3.21	3.23	3.58	3.58	3.58	3.60	4.01	4.01	4.00	4.02
		Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.0	14.0	14.0	16.0	16.0	16.0	16.1
	1400	HI PR	266	267	269	274	308	309	311	316	352	353	355	359	399	400	402	406	450	451	453	457	504	505	507	511
		LO PR	129	130	133	139	136	138	141	146	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171
		MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3
		S/T	1.00	0.99	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.88	0.73	1.00	1.00	0.90	0.75	1.00	1.00	1.00	0.77	1.00	1.00	1.00	0.82
		ΔT	30	29	25	22	30	28	25	22	31	29	25	22	30	28	25	22	30	28	25	21	31	29	26	22
	1575	KW	2.34	2.34	2.33	2.35	2.61	2.61	2.60	2.62	2.91	2.91	2.90	2.92	3.23	3.23	3.23	3.25	3.60	3.59	3.59	3.61	4.02	4.02	4.01	4.04
		Amps	8.4	8.4	8.3	8.0	9.6	9.6	9.6	10.0	11.0	11.0	10.9	11.0	12.5	12.5	12.4	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.0	16.1
		HI PR	269	270	272	276	310	311	313	318	354	355	357	362	401	402	404	409	452	453	455	459	506	507	509	514
		LO PR	130	132	135	141	138	140	143	148	145	146	150	155	150	152	155	161	156	158	161	166	163	165	168	173
		MBh	41.7	42.3	43.5	45.3	41.4	41.9	43.1	44.9	40.3	40.9	42.1	43.9	38.5	39.1	40.3	42.1	36.4	36.9	38.1	39.9	34.4	34.9	36.1	37.9
	S/T	1.00	1.00	0.88	0.73	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.86	
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	21	
	KW	2.35	2.35	2.34	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.91	2.93	3.24	3.24	3.24	3.26	3.61	3.61	3.60	3.62	4.03	4.03	4.03	4.05	
	Amps	8.4	8.4	8.4	8.0	9.7	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.1	14.0	16.1	16.1	16.1	16.2	
	HI PR	271	272	274	278	312	314	315	320	356	357	359	364	403	404	406	411	454	455	457	462	508	509	511	516	
LO PR	132	134	137	143	140	142	145	150	147	148	152	157	153	154	157	163	158	160	163	168	165	167	170	175		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

IDB		OUTDOOR AMBIENT TEMPERATURE															115																	
		65					75					85					95					105					115							
		ENTERING INDOOR WET BULB TEMPERATURE																																
AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1225	MBh	39.7	40.2	41.4	-	39.3	39.9	41.1	-	38.3	38.8	40.0	-	36.5	37.1	38.2	-	34.3	34.9	36.1	-	32.3	32.9	34.1	-	32.3	32.9	34.1	-	32.3	32.9	34.1	-
		S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-
		ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-	21	19	15	-	21	19	15	-
		KW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.88	-	3.21	3.21	3.21	-	3.58	3.57	3.57	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-
		Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.9	10.9	10.9	-	12.4	12.4	12.3	-	14.0	14.0	14.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-
		HI PR	264	266	267	-	306	307	309	-	350	351	353	-	397	398	400	-	448	449	451	-	502	503	505	-	502	503	505	-	502	503	505	-
70	1400	LO PR	126	128	131	-	134	135	139	-	140	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-	159	160	163	-	159	160	163	-
		MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-
		S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-
		KW	2.34	2.33	2.33	-	2.60	2.60	2.60	-	2.90	2.90	2.90	-	3.23	3.23	3.22	-	3.59	3.59	3.58	-	4.02	4.01	4.01	-	4.02	4.01	4.01	-	4.02	4.01	4.01	-
		Amps	8.4	8.3	8.3	-	9.6	9.6	9.6	-	11.0	10.9	10.9	-	12.4	12.4	12.4	-	14.1	14.1	14.1	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-
70	1575	HI PR	267	268	270	-	308	309	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-	504	505	507	-	504	505	507	-
		LO PR	128	130	133	-	136	137	140	-	142	144	147	-	148	150	153	-	154	155	158	-	161	162	165	-	161	162	165	-	161	162	165	-
		MBh	40.8	41.4	42.6	-	40.5	41.0	42.2	-	39.4	40.0	41.2	-	37.7	38.2	39.4	-	35.5	36.0	37.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-
		S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.58	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-
		ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-
		KW	2.35	2.34	2.34	-	2.62	2.61	2.61	-	2.92	2.91	2.91	-	3.24	3.24	3.23	-	3.60	3.60	3.60	-	4.03	4.03	4.02	-	4.03	4.03	4.02	-	4.03	4.03	4.02	-
75	1225	Amps	8.4	8.4	8.4	-	9.6	9.6	9.6	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.1	14.1	-	16.1	16.1	16.1	-	16.1	16.1	16.1	-	16.1	16.1	16.1	-
		HI PR	269	270	272	-	311	312	314	-	354	355	357	-	401	402	404	-	452	453	455	-	506	507	509	-	506	507	509	-	506	507	509	-
		LO PR	130	132	135	-	138	139	142	-	144	146	149	-	150	152	155	-	156	157	160	-	163	164	167	-	163	164	167	-	163	164	167	-
		MBh	39.7	40.3	41.4	43.3	39.3	39.9	41.1	42.9	38.3	38.9	40.1	41.9	36.5	37.1	38.3	40.1	34.3	34.9	36.1	37.9	32.4	32.9	34.1	35.9	32.4	32.9	34.1	35.9	32.4	32.9	34.1	35.9
		S/T	0.77	0.69	0.55	0.40	1.00	0.69	0.55	0.40	1.00	0.72	0.58	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53
		ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	15	24	22	18	15	25	23	19	16	24	22	18	15	25	23	19	16
75	1400	KW	2.32	2.32	2.31	2.33	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.90	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.59	4.00	4.00	3.99	4.01	4.00	4.00	3.99	4.01	4.00	3.99	4.01	
		Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	9.6	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.4	14.0	14.0	14.0	14.0	16.0	16.0	15.9	16.0	16.0	16.0	15.9	16.0	16.0	15.9	16.0	
		HI PR	265	266	268	272	306	307	309	314	350	351	353	358	397	398	400	405	448	449	451	455	502	503	505	510	502	503	505	510	502	503	505	510
		LO PR	126	128	131	136	134	135	139	144	141	142	145	151	146	148	151	156	152	153	157	162	159	160	164	169	152	153	157	162	159	160	164	169
		MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	37.6	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4
		S/T	0.83	0.75	0.61	0.46	1.00	0.76	0.61	0.47	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.80	0.68	0.53	1.00	1.00	0.74	0.59	1.00	1.00	0.74	0.59	1.00	1.00	0.74	0.59
75	1575	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	22	21	17	14	24	22	18	15	24	22	17	14	24	22	18	15
		KW	2.33	2.33	2.33	2.35	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.92	3.23	3.23	3.22	3.24	3.59	3.59	3.58	3.60	4.01	4.01	4.01	4.03	4.01	4.01	4.01	4.01	4.01	4.03	4.03	
		Amps	8.3	8.3	8.3	8.0	9.6	9.6	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1	16.0	16.0	16.0	16.0	16.0	16.0	16.1	16.1
		HI PR	267	268	270	274	309	310	312	316	352	353	355	360	399	400	402	407	450	451	453	458	504	505	507	512	504	505	507	512	504	505	507	512
		LO PR	128	130	133	138	136	137	140	146	142	144	147	153	148	150	153	158	154	155	158	164	161	162	165	171	154	155	158	164	161	162	165	171
		MBh	40.8	41.4	42.6	44.4	40.5	41.1	42.2	44.0	39.5	40.0	41.2	43.0	37.7	38.2	39.4	41.2	35.5	36.1	37.2	39.1	33.5	34.1	35.3	37.1	33.5	34.1	35.3	37.1	33.5	34.1	35.3	37.1
75	1575	S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.72	0.57	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62
		ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	21	20	16	13	23	21	17	14	23	21	17	14	23	21	17	14
		KW	2.35	2.34	2.34	2.36	2.61	2.61	2.61	2.63	2.91	2.91	2.91	2.93	3.24	3.24	3.23	3.25	3.60	3.60	3.59	3.61	4.03	4.02	4.02	4.04	4.03	4.02	4.02	4.02	4.02	4.04	4.04	
		Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11																				

		65					75					85					95					105					115				
		OUTDOOR AMBIENT TEMPERATURE																													
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71						
80	1225	MBh	39.9	40.5	41.7	43.5	39.6	40.1	41.3	43.1	38.5	39.1	40.3	42.1	36.7	37.3	38.5	40.3	34.6	35.1	36.3	38.1	32.6	33.1	34.3	36.1					
		S/T	1.00	0.82	0.68	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.71	0.6	1.00	1.00	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.81	0.66					
		ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20					
		KW	2.32	2.32	2.31	2.3	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.9	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.6	4.00	4.00	4.00	4.02					
		Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.0	14.0	14.0	14.0	14.0	16.0	16.0	16.0	16.0					
	1400	HI PR	265	266	268	273	307	308	310	314	351	352	354	358	398	399	401	405	448	449	451	456	502	504	505	510					
		LO PR	127	128	131	137	134	136	139	144	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169					
		MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	39.0	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6					
		S/T	1.00	0.88	0.74	0.6	1.00	0.89	0.74	0.60	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.87	0.72					
		ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	21	18	26	25	21	18	28	26	22	19					
1575	KW	2.33	2.33	2.33	2.4	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.9	3.23	3.23	3.22	3.24	3.59	3.59	3.58	3.6	4.02	4.01	4.01	4.03						
	Amps	8.4	8.3	8.3	8.0	9.6	9.6	9.6	10.0	11.0	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1						
	HI PR	267	268	270	275	309	310	312	317	353	354	356	360	400	401	403	407	451	452	454	458	505	506	508	512						
	LO PR	129	130	133	139	136	138	141	146	143	144	148	153	149	150	153	159	154	156	159	164	161	163	166	171						
	MBh	41.1	41.6	42.8	44.6	40.7	41.3	42.4	44.3	39.7	40.2	41.4	43.2	37.9	38.4	39.6	41.4	35.7	36.3	37.4	39.3	33.7	34.3	35.5	37.3						
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.75						
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18						
	KW	2.35	2.34	2.34	2.4	2.62	2.61	2.61	2.63	2.92	2.91	2.91	2.9	3.24	3.24	3.23	3.25	3.60	3.60	3.60	3.6	4.03	4.03	4.02	4.00						
	Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.1	14.1	14.0	16.1	16.1	16.1	16.2						
	HI PR	270	271	273	277	311	312	314	319	355	356	358	363	402	403	405	410	453	454	456	460	507	508	510	514						
LO PR	131	132	135	141	138	140	143	148	145	147	150	155	151	152	155	161	156	158	161	166	163	165	168	173							

85	1225	MBh	40.6	41.1	42.3	44.1	40.2	40.8	42.0	43.8	39.2	39.7	40.9	42.7	37.4	38.0	39.1	41.0	35.2	35.8	37.0	38.8	33.2	33.8	35.0	36.8
		S/T	1.00	0.92	0.78	0.63	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.71	0.71	1.00	1.00	1.00	0.76
		ΔT	31	30	26	23	31	30	26	23	32	30	26	23	31	30	26	23	31	29	26	22	32	30	27	24
		KW	2.33	2.32	2.32	2.34	2.59	2.59	2.59	2.61	2.89	2.89	2.89	2.91	3.22	3.22	3.21	3.23	3.58	3.58	3.58	3.60	4.01	4.01	4.00	4.02
		Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.0	14.0	14.0	16.0	16.0	16.0	16.1
	HI PR	266	267	269	274	308	309	311	316	352	353	355	359	399	400	402	406	450	451	453	457	504	505	507	511	
	LO PR	129	130	133	139	136	138	141	146	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171	
	MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3	
	S/T	1.00	0.99	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.88	0.73	1.00	1.00	0.90	0.75	1.00	1.00	0.77	0.77	1.00	1.00	1.00	0.82	
	ΔT	30	29	25	22	30	28	25	22	31	29	25	22	30	28	25	22	30	28	25	21	31	29	26	22	
	1400	KW	2.34	2.34	2.33	2.35	2.61	2.61	2.60	2.62	2.91	2.91	2.90	2.92	3.23	3.23	3.23	3.25	3.60	3.59	3.59	3.61	4.02	4.02	4.01	4.04
	Amps	8.4	8.4	8.3	8.0	9.6	9.6	9.6	10.0	11.0	11.0	10.9	11.0	12.5	12.5	12.4	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.0	16.1	
	HI PR	269	270	272	276	310	311	313	318	354	355	357	362	401	402	404	409	452	453	455	459	506	507	509	514	
	LO PR	130	132	135	141	138	140	143	148	145	146	150	155	150	152	155	161	156	158	161	166	163	165	168	173	
	MBh	41.7	42.3	43.5	45.3	41.4	41.9	43.1	44.9	40.3	40.9	42.1	43.9	38.5	39.1	40.3	42.1	36.4	36.9	38.1	39.9	34.4	34.9	36.1	37.9	
	1575	S/T	1.00	1.00	0.88	0.73	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.81	0.81	1.00	1.00	1.00	0.86
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	21	
	KW	2.35	2.35	2.34	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.91	2.93	3.24	3.24	3.24	3.26	3.61	3.61	3.60	3.62	4.03	4.03	4.03	4.05	
	Amps	8.4	8.4	8.4	8.0	9.7	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.1	14.0	16.1	16.1	16.1	16.2	
	HI PR	271	272	274	278	312	314	315	320	356	357	359	364	403	404	406	411	454	455	457	462	508	509	511	516	
LO PR	132	134	137	143	140	142	145	150	147	148	152	157	153	154	157	163	158	160	163	168	165	167	170	175		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
		ENTERING INDOOR WET BULB TEMPERATURE																																			
70	MBh	46.4	47.1	48.5	-	46.0	46.7	48.0	-	44.8	45.4	46.8	-	42.7	43.4	44.8	-	40.2	40.8	42.2	-	37.9	38.5	39.9	-	37.9	38.5	39.9	-	37.9	38.5	39.9	-				
	S/T	0.61	0.54	0.41	-	0.62	0.55	0.41	-	0.65	0.57	0.44	-	0.66	0.59	0.46	-	1.00	0.61	0.48	-	1.00	0.66	0.53	-	1.00	0.66	0.53	-	1.00	0.66	0.53	-				
	ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-	20	18	15	-				
	KW	2.77	2.77	2.76	-	3.09	3.08	3.08	-	3.44	3.44	3.43	-	3.83	3.82	3.82	-	4.26	4.25	4.25	-	4.76	4.76	4.75	-	4.76	4.76	4.75	-	4.76	4.76	4.75	-				
	Amps	10.1	10.1	10.0	-	11.5	11.5	11.5	-	13.2	13.2	13.1	-	14.9	14.9	14.9	-	16.9	16.9	16.9	-	19.2	19.2	19.2	-	19.2	19.2	19.2	-	19.2	19.2	19.2	-				
	HI PR	257	259	260	-	298	299	301	-	341	342	343	-	386	387	389	-	436	437	438	-	488	489	491	-	488	489	491	-	488	489	491	-				
	LO PR	123	125	128	-	131	132	136	-	137	139	142	-	143	145	148	-	148	150	153	-	155	157	160	-	155	157	160	-	155	157	160	-				
	MBh	46.9	47.6	48.9	-	46.5	47.1	48.5	-	45.3	45.9	47.3	-	43.2	43.9	45.2	-	40.7	41.3	42.7	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-				
	S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.71	0.57	-	1.00	0.71	0.57	-	1.00	0.71	0.57	-				
	ΔT	18	17	13	-	18	17	13	-	19	17	13	-	18	17	13	-	18	16	13	-	19	17	14	-	19	17	14	-	19	17	14	-				
KW	2.78	2.78	2.77	-	3.10	3.10	3.09	-	3.45	3.45	3.45	-	3.84	3.84	3.83	-	4.27	4.27	4.26	-	4.77	4.77	4.76	-	4.77	4.77	4.76	-	4.77	4.77	4.76	-					
Amps	10.1	10.1	10.1	-	11.6	11.6	11.6	-	13.2	13.2	13.2	-	15.0	15.0	14.9	-	16.9	16.9	16.9	-	19.3	19.2	19.2	-	19.3	19.2	19.2	-	19.3	19.2	19.2	-					
HI PR	259	260	262	-	300	301	303	-	342	343	345	-	388	389	391	-	437	438	440	-	490	491	493	-	490	491	493	-	490	491	493	-					
LO PR	125	126	129	-	132	134	137	-	139	140	144	-	144	146	149	-	150	151	154	-	157	158	161	-	157	158	161	-	157	158	161	-					
1800	MBh	47.9	48.5	49.9	-	47.5	48.1	49.5	-	46.2	46.9	48.3	-	44.2	44.8	46.2	-	41.6	42.3	43.7	-	39.3	40.0	41.3	-	39.3	40.0	41.3	-	39.3	40.0	41.3	-				
	S/T	0.70	0.62	0.49	-	0.70	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-				
	ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	18	16	13	-	18	16	13	-				
	KW	2.80	2.80	2.79	-	3.12	3.11	3.11	-	3.47	3.47	3.46	-	3.86	3.85	3.85	-	4.29	4.28	4.28	-	4.79	4.79	4.78	-	4.79	4.79	4.78	-	4.79	4.79	4.78	-				
	Amps	10.2	10.2	10.2	-	11.7	11.7	11.6	-	13.3	13.3	13.3	-	15.1	15.0	15.0	-	17.0	17.0	17.0	-	19.3	19.3	19.3	-	19.3	19.3	19.3	-	19.3	19.3	19.3	-				
	HI PR	262	263	265	-	302	304	305	-	345	346	348	-	391	392	394	-	440	441	443	-	493	494	496	-	493	494	496	-	493	494	496	-				
	LO PR	127	129	132	-	135	136	140	-	141	143	146	-	147	149	152	-	152	154	157	-	159	161	164	-	159	161	164	-	159	161	164	-				
	75	MBh	46.4	47.1	48.5	50.6	46.0	46.7	48.1	50.2	44.8	45.5	46.9	49.0	42.7	43.4	44.8	46.9	40.2	40.9	42.2	44.4	37.9	38.5	39.9	42.0	37.9	38.5	39.9	42.0	37.9	38.5	39.9	42.0			
		S/T	0.74	0.67	0.53	0.39	0.75	0.67	0.54	0.40	1.00	0.70	0.56	0.42	1.00	0.72	0.58	0.44	1.00	0.74	0.60	0.46	1.00	1.00	0.66	0.51	1.00	1.00	0.66	0.51	1.00	1.00	0.66	0.51			
		ΔT	23	21	18	15	23	21	18	14	23	22	18	15	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15	24	22	19	15			
KW		2.77	2.76	2.76	2.78	3.08	3.08	3.08	3.10	3.44	3.44	3.43	3.46	3.82	3.82	3.82	3.84	4.25	4.25	4.25	4.27	4.76	4.76	4.75	4.77	4.76	4.76	4.75	4.77	4.76	4.75	4.77					
Amps		10.1	10.1	10.0	10.1	11.5	11.5	11.5	11.6	13.2	13.1	13.1	13.2	14.9	14.9	15.0	15.0	16.9	16.9	16.8	17.0	19.2	19.2	19.1	19.3	19.2	19.2	19.1	19.3	19.2	19.1	19.3					
HI PR		258	259	261	265	298	299	301	306	341	342	344	348	386	388	389	394	436	437	439	443	488	490	491	496	488	490	491	496	488	490	491	496				
LO PR		123	125	128	133	131	132	136	141	137	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165	155	157	160	165	155	157	160	165				
MBh		46.9	47.6	49.0	51.1	46.5	47.2	48.5	50.7	45.3	46.0	47.3	49.5	43.2	43.9	45.3	47.4	40.7	41.3	42.7	44.8	38.4	39.0	40.4	42.5	38.4	39.0	40.4	42.5	38.4	39.0	40.4	42.5				
S/T		0.79	0.71	0.58	0.44	0.79	0.72	0.58	0.44	1.00	0.74	0.61	0.47	1.00	0.76	0.63	0.49	1.00	0.78	0.65	0.51	1.00	1.00	0.70	0.56	1.00	1.00	0.70	0.56	1.00	1.00	0.70	0.56				
ΔT		22	21	17	14	22	20	17	14	23	21	17	14	22	20	17	14	22	20	17	13	23	21	18	15	23	21	18	15	23	21	18	15				
KW	2.78	2.78	2.77	2.80	3.10	3.09	3.09	3.11	3.45	3.45	3.44	3.47	3.84	3.83	3.83	3.85	4.27	4.26	4.26	4.28	4.77	4.77	4.76	4.79	4.77	4.77	4.76	4.79	4.77	4.76	4.79						
Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.5	11.7	13.2	13.2	13.2	13.3	15.0	14.9	15.0	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3	19.2	19.2	19.1	19.3	19.2	19.1	19.3						
HI PR	259	260	262	267	300	301	303	307	342	344	345	350	388	389	391	396	437	439	440	445	490	491	493	498	490	491	493	498	490	491	493	498					
LO PR	125	126	129	135	132	134	137	142	139	140	144	149	144	146	149	154	150	151	155	160	157	158	161	167	157	158	161	167	157	158	161	167					
1800	MBh	47.9	48.5	49.9	52.0	47.5	48.1	49.5	51.6	46.3	46.9	48.3	50.4	44.2	44.8	46.2	48.3	41.7	42.3	43.7	45.8	39.3	40.0	41.4	43.5	39.3	40.0	41.4	43.5	39.3	40.0	41.4	43.5				
	S/T	0.82	0.75	0.62	0.47	1.00	0.76	0.62	0.48	1.00	0.78	0.65	0.50	1.00	0.80	0.67	0.52	1.00	0.82	0.69	0.55	1.00	1.00	0.74	0.60	1.00	1.00	0.74	0.60	1.00	1.00	0.74	0.60				
	ΔT	21	19	16	13	21	19	16	12	21	20	16	13	21	19	16	12	21	19	16	12	22	20	17	13	22	20	17	13	22	20	17	13				
	KW	2.80	2.79	2.79	2.81	3.11	3.11	3.11	3.13	3.47	3.47	3.46	3.49	3.85	3.85	3.85	3.87	4.28	4.28	4.28	4.30	4.79	4.79	4.78	4.80	4.79	4.79	4.78	4.80	4.79	4.79	4.78	4.80				
	Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.0</																						

		65												75						85						95						105						115					
		OUTDOOR AMBIENT TEMPERATURE																																									
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71										
80	1400	MBh	46.7	47.3	48.7	50.8	46.3	46.9	48.3	50.4	45.1	45.7	47.1	49.2	43.0	43.6	45.0	47.1	40.4	41.1	42.5	44.6	38.1	38.8	40.2	42.3	38.1	38.8	40.2	42.3	38.1	38.8	40.2	42.3									
		S/T	1.00	0.79	0.66	0.5	1.00	0.80	0.66	0.52	1.00	0.82	0.69	0.6	1.00	0.84	0.71	0.57	1.00	1.00	0.73	0.6	1.00	1.00	0.78	0.64	1.00	1.00	0.78	0.64	1.00	1.00	0.78	0.64									
		ΔT	27	25	22	19	27	25	22	18	27	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19	28	26	23	19	28	26	23	19									
		KW	2.77	2.77	2.76	2.8	3.09	3.08	3.08	3.10	3.44	3.44	3.43	3.5	3.83	3.82	3.82	3.84	4.26	4.25	4.25	4.3	4.76	4.76	4.75	4.78	4.76	4.76	4.75	4.78	4.76	4.76	4.75	4.78									
		Amps	10.1	10.1	10.0	10.2	11.5	11.5	11.5	11.6	13.2	13.1	13.1	13.2	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3	19.2	19.2	19.2	19.3	19.2	19.2	19.2	19.2	19.3								
	HI PR	258	259	261	266	299	300	302	306	341	342	344	349	387	388	390	394	436	437	439	444	489	490	492	496	489	490	492	496	489	490	492	496										
	LO PR	124	125	129	134	131	133	136	141	138	140	143	148	144	145	148	153	149	151	154	159	156	157	160	166	156	157	160	166	156	157	160	166										
80	1550	MBh	47.2	47.8	49.2	51.3	46.8	47.4	48.8	50.9	45.5	46.2	47.6	49.7	43.5	44.1	45.5	47.6	40.9	41.6	43.0	45.1	38.6	39.3	40.6	42.8	38.6	39.3	40.6	42.8	38.6	39.3	40.6	42.8									
		S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.61	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.68	1.00	1.00	0.82	0.68	1.00	1.00	0.82	0.68									
		ΔT	26	25	21	18	26	24	21	18	27	25	21	18	26	24	21	18	26	24	21	17	27	25	22	18	27	25	22	18	27	25	22	18									
		KW	2.78	2.78	2.77	2.8	3.10	3.10	3.09	3.12	3.45	3.45	3.45	3.5	3.84	3.84	3.83	3.86	4.27	4.27	4.27	4.26	4.3	4.77	4.77	4.76	4.79	4.77	4.77	4.76	4.79	4.77	4.77	4.76	4.79								
		Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.6	11.7	13.2	13.2	13.2	13.3	15.0	15.0	15.0	14.9	15.1	16.9	16.9	16.9	17.0	19.3	19.2	19.2	19.3	19.3	19.2	19.2	19.3	19.2	19.2	19.2	19.3								
	HI PR	260	261	263	267	300	302	303	308	343	344	346	350	389	390	392	396	438	439	441	445	491	492	493	498	491	492	493	498	491	492	493	498										
	LO PR	125	127	130	135	133	134	138	143	139	141	144	149	145	146	150	155	150	152	155	160	157	159	162	167	157	159	162	167	157	159	162	167										
1800	1800	MBh	48.1	48.8	50.2	52.3	47.7	48.4	49.8	51.9	46.5	47.2	48.5	50.7	44.4	45.1	46.5	48.6	41.9	42.5	43.9	46.0	39.6	40.2	41.6	43.7	39.6	40.2	41.6	43.7	39.6	40.2	41.6	43.7									
		S/T	1.00	0.87	0.74	0.6	1.00	0.88	0.75	0.60	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.65	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72									
		ΔT	25	23	20	17	25	23	20	16	25	24	20	17	25	23	20	16	25	23	20	16	26	24	21	17	26	24	21	17	26	24	21	17									
		KW	2.80	2.80	2.79	2.8	3.12	3.11	3.11	3.13	3.47	3.47	3.46	3.5	3.86	3.85	3.85	3.87	4.29	4.28	4.28	4.3	4.79	4.79	4.78	4.81	4.79	4.79	4.78	4.81	4.79	4.79	4.78	4.81									
		Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.0	15.0	15.1	17.0	17.0	17.0	17.1	19.3	19.3	19.3	19.4	19.3	19.3	19.3	19.4	19.3	19.3	19.3	19.4									
	HI PR	263	264	266	270	303	304	306	311	346	347	349	353	391	392	394	399	441	442	444	448	493	493	494	496	493	493	494	496	493	494	496	501										
	LO PR	128	130	133	138	136	137	140	145	142	144	147	152	148	149	152	157	153	155	158	163	160	161	165	170	160	161	165	170	160	161	165	170										

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	58.8	59.6	61.3	-	58.2	59.1	60.8	-	56.7	57.5	59.3	-	54.1	54.9	56.7	-	50.9	51.7	53.5	-	48.0	48.8	50.6	-	48.0	48.8	50.6	-	48.0	48.8	50.6	-				
	S/T	0.62	0.55	0.42	-	0.62	0.55	0.43	-	0.65	0.58	0.45	-	0.66	0.59	0.47	-	0.69	0.61	0.49	-	1.00	0.66	0.54	-	1.00	0.66	0.54	-	1.00	0.66	0.54	-				
	ΔT	21	19	15	-	21	19	15	-	21	19	15	-	21	19	15	-	21	19	15	-	22	20	16	-	22	20	16	-	22	20	16	-				
	KW	3.43	3.42	3.42	-	3.85	3.85	3.84	-	4.33	4.33	4.32	-	4.84	4.84	4.83	-	5.42	5.42	5.41	-	6.09	6.09	6.08	-	6.09	6.09	6.08	-	6.09	6.09	6.08	-				
	Amps	13.2	13.2	13.1	-	15.1	15.1	15.1	-	17.3	17.3	17.3	-	19.7	19.6	19.6	-	22.3	22.3	22.2	-	25.4	25.4	25.3	-	25.4	25.4	25.3	-	25.4	25.4	25.3	-				
	HI PR	270	271	273	-	312	313	315	-	356	358	359	-	404	405	407	-	455	457	459	-	510	511	513	-	510	511	513	-	510	511	513	-				
70	LO PR	117	118	121	-	124	125	128	-	130	131	134	-	135	136	139	-	140	141	144	-	146	148	151	-	146	148	151	-	146	148	151	-				
	MBh	59.7	60.5	62.3	-	59.2	60.0	61.7	-	57.7	58.5	60.2	-	55.1	55.9	57.6	-	51.9	52.7	54.4	-	49.0	49.8	51.5	-	49.0	49.8	51.5	-	49.0	49.8	51.5	-				
	S/T	0.65	0.58	0.45	-	0.66	0.58	0.46	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	0.72	0.65	0.52	-	1.00	0.69	0.57	-	1.00	0.69	0.57	-	1.00	0.69	0.57	-				
	ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	17	14	-	21	19	15	-	21	19	15	-	21	19	15	-				
	KW	3.45	3.44	3.43	-	3.87	3.87	3.86	-	4.35	4.34	4.34	-	4.86	4.86	4.85	-	5.44	5.43	5.43	-	6.11	6.11	6.10	-	6.11	6.11	6.10	-	6.11	6.11	6.10	-				
	Amps	13.3	13.3	13.2	-	15.2	15.2	15.2	-	17.4	17.4	17.3	-	19.8	19.7	19.7	-	22.4	22.4	22.3	-	25.5	25.5	25.4	-	25.5	25.5	25.4	-	25.5	25.5	25.4	-				
2000	HI PR	272	273	275	-	314	316	318	-	359	360	362	-	406	408	409	-	458	459	461	-	513	514	516	-	513	514	516	-	513	514	516	-				
	LO PR	118	120	123	-	125	127	130	-	132	133	136	-	137	138	141	-	142	143	146	-	148	150	153	-	148	150	153	-	148	150	153	-				
	MBh	61.2	62.0	63.7	-	60.6	61.5	63.2	-	59.1	60.0	61.7	-	56.5	57.3	59.1	-	53.3	54.2	55.9	-	50.4	51.3	53.0	-	50.4	51.3	53.0	-	50.4	51.3	53.0	-				
	S/T	0.66	0.59	0.46	-	0.66	0.59	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.70	0.58	-	1.00	0.70	0.58	-	1.00	0.70	0.58	-				
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	20	18	14	-	20	18	14	-	20	18	14	-				
	KW	3.47	3.46	3.46	-	3.89	3.89	3.88	-	4.37	4.37	4.36	-	4.88	4.88	4.87	-	5.46	5.46	5.45	-	6.13	6.13	6.12	-	6.13	6.13	6.12	-	6.13	6.13	6.12	-				
2000	Amps	13.4	13.3	13.3	-	15.3	15.3	15.3	-	17.5	17.5	17.4	-	19.8	19.8	19.8	-	22.5	22.5	22.4	-	25.6	25.6	25.5	-	25.6	25.6	25.5	-	25.6	25.6	25.5	-				
	HI PR	275	276	278	-	317	319	320	-	362	363	365	-	409	410	412	-	461	462	464	-	516	517	519	-	516	517	519	-	516	517	519	-				
	LO PR	121	123	126	-	128	130	133	-	134	136	139	-	140	141	144	-	145	146	149	-	151	152	155	-	151	152	155	-	151	152	155	-				
	MBh	58.8	59.6	61.3	64.0	58.3	59.1	60.8	63.5	56.8	57.6	59.3	62.0	54.1	55.0	56.7	59.3	51.0	51.8	53.5	56.2	48.1	48.9	50.6	53.3	48.1	48.9	50.6	53.3	48.1	48.9	50.6	53.3				
	S/T	0.74	0.67	0.54	0.41	0.74	0.67	0.55	0.41	0.77	0.70	0.57	0.44	1.00	0.71	0.59	0.46	1.00	0.73	0.61	0.48	1.00	0.78	0.66	0.52	1.00	0.78	0.66	0.52	1.00	0.78	0.66	0.52				
	ΔT	25	23	20	16	25	23	19	16	26	24	20	16	25	23	19	16	25	23	19	15	26	24	20	17	26	24	20	17	26	24	20	17				
1550	KW	3.42	3.42	3.41	3.45	3.85	3.85	3.84	3.87	4.33	4.32	4.32	4.35	4.84	4.84	4.83	4.86	5.42	5.41	5.41	5.44	6.09	6.09	6.08	6.11	6.09	6.09	6.08	6.11	6.09	6.09	6.08	6.11				
	Amps	13.2	13.1	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.2	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5				
	HI PR	270	271	273	278	312	314	315	320	357	358	360	364	404	405	407	412	456	457	459	463	511	512	514	518	511	512	514	518	511	512	514	518				
	LO PR	117	118	121	126	124	125	128	133	130	131	134	139	135	136	139	144	140	141	144	149	146	148	151	155	146	148	151	155	146	148	151	155				
	MBh	59.7	60.6	62.3	64.9	59.2	60.0	61.8	64.4	57.7	58.5	60.3	62.9	55.1	55.9	57.6	60.3	51.9	52.7	54.5	57.1	49.0	49.8	51.6	54.2	49.0	49.8	51.6	54.2	49.0	49.8	51.6	54.2				
	S/T	0.77	0.70	0.57	0.44	0.78	0.70	0.58	0.45	0.80	0.73	0.60	0.47	1.00	0.75	0.62	0.49	1.00	0.77	0.64	0.51	1.00	0.81	0.69	0.56	1.00	0.81	0.69	0.56	1.00	0.81	0.69	0.56				
1750	ΔT	24	22	18	15	24	22	18	14	25	23	19	15	24	22	18	14	24	22	18	14	25	23	19	15	25	23	19	15	25	23	19	15				
	KW	3.44	3.44	3.43	3.46	3.87	3.87	3.86	3.89	4.34	4.34	4.33	4.37	4.86	4.86	4.85	4.88	5.44	5.43	5.42	5.46	6.11	6.11	6.10	6.13	6.11	6.11	6.10	6.13	6.11	6.11	6.10	6.13				
	Amps	13.3	13.2	13.2	13.4	15.2	15.2	15.2	15.3	17.4	17.4	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.4	22.3	22.5	25.5	25.5	25.4	25.6	25.5	25.5	25.4	25.6	25.5	25.4	25.6	25.5	25.6			
	HI PR	272	274	276	280	315	316	318	322	359	360	362	367	407	408	410	414	458	459	461	466	513	514	516	521	513	514	516	521	513	514	516	521				
	LO PR	118	120	123	128	125	127	130	135	132	133	136	141	137	138	141	146	142	143	146	151	148	150	153	157	148	150	153	157	148	150	153	157				
	MBh	61.2	62.0	63.8	66.4	60.7	61.5	63.2	65.9	59.2	60.0	61.7	64.4	56.6	57.4	59.1	61.8	53.4	54.2	55.9	58.6	50.5	51.3	53.0	55.7	50.5	51.3	53.0	55.7	50.5	51.3	53.0	55.7				
2000	S/T	0.78	0.71	0.58	0.45	0.78	0.71	0.59	0.46	1.00	0.74	0.61	0.48	1.00	0.75	0.63	0.50	1.00	0.78	0.65	0.52	1.00	0.82	0.70	0.56	1.00	0.82	0.70	0.56	1.00	0.82	0.70	0.56				
	ΔT	23	21	17	13	23	21	17	13	23	21	18	14	23	21	17	13	23	21	17	13	24	22	18	14	24	22	18	14	24	22	18	14				
	KW	3.46	3.46	3.45	3.49	3.89	3.89	3.88	3.91	4.37	4.36	4.36	4.39	4.88	4.88	4.87	4.90	5.46																			

		OUTDOOR AMBIENT TEMPERATURE																																					
		65						75						85						95						105						115							
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195			
		ENTERING INDOOR WET BULB TEMPERATURE																																					
1550	MBh	59.1	59.9	61.6	64.3	58.6	59.4	61.1	63.8	57.1	57.9	59.6	62.3	54.4	55.3	57.0	59.6	51.3	52.1	53.8	56.5	48.4	49.2	50.9	53.6	48.4	49.2	50.9	53.6	48.4	49.2	50.9	53.6	48.4	49.2	50.9	53.6		
	S/T	0.85	0.78	0.66	0.5	1.00	0.79	0.66	0.53	1.00	0.81	0.69	0.6	1.00	0.83	0.70	0.57	1.00	0.85	0.72	0.6	1.00	0.89	0.76	0.64	1.00	0.89	0.76	0.64	1.00	0.89	0.76	0.64	1.00	0.89	0.76	0.64		
	ΔT	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20		
	KW	3.43	3.42	3.42	3.5	3.85	3.85	3.84	3.87	4.33	4.32	4.32	4.4	4.84	4.84	4.83	4.87	5.42	5.42	5.41	5.4	6.09	6.09	6.08	6.12	6.09	6.09	6.08	6.12	6.09	6.09	6.08	6.12	6.09	6.09	6.08	6.12		
	Amps	13.2	13.2	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.3	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5		
	LO PR	271	272	274	278	313	314	316	321	357	358	360	365	405	406	408	413	456	457	459	464	511	512	514	519	511	512	514	519	511	512	514	519	511	512	514	519		
80	MBh	60.0	60.9	62.6	65.2	59.5	60.3	62.1	64.7	58.0	58.8	60.6	63.2	55.4	56.2	57.9	60.6	52.2	53.0	54.8	57.4	49.3	50.1	51.9	54.5	49.3	50.1	51.9	54.5	49.3	50.1	51.9	54.5	49.3	50.1	51.9	54.5		
	S/T	0.89	0.81	0.69	0.6	1.00	0.82	0.70	0.56	1.00	0.84	0.72	0.6	1.00	0.86	0.74	0.60	1.00	0.88	0.76	0.6	1.00	0.90	0.78	0.6	1.00	0.92	0.80	0.67	1.00	0.93	0.80	0.67	1.00	0.93	0.80	0.67		
	ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19		
	KW	3.44	3.44	3.43	3.5	3.87	3.87	3.86	3.89	4.35	4.34	4.34	4.4	4.86	4.86	4.85	4.88	5.44	5.44	5.43	5.5	6.11	6.11	6.10	6.13	6.11	6.11	6.10	6.13	6.11	6.11	6.10	6.13	6.11	6.11	6.10	6.13		
	Amps	13.3	13.2	13.2	13.4	15.2	15.2	15.2	15.3	17.4	17.4	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.4	22.3	22.5	25.5	25.5	25.4	25.6	25.5	25.5	25.4	25.6	25.5	25.5	25.4	25.6	25.5	25.5	25.4	25.6		
	LO PR	273	274	276	281	315	316	318	323	359	361	362	367	407	408	410	415	458	460	462	466	513	514	516	521	513	514	516	521	513	514	516	521	513	514	516	521		
2000	MBh	61.5	62.3	64.1	66.7	61.0	61.8	63.5	66.2	59.5	60.3	62.0	64.7	56.9	57.7	59.4	62.1	53.7	54.5	56.2	58.9	50.8	51.6	53.3	56.0	50.8	51.6	53.3	56.0	50.8	51.6	53.3	56.0	50.8	51.6	53.3	56.0		
	S/T	0.89	0.82	0.70	0.6	1.00	0.83	0.70	0.57	1.00	0.85	0.73	0.6	1.00	0.87	0.75	0.61	1.00	0.89	0.77	0.6	1.00	0.91	0.79	0.6	1.00	0.93	0.81	0.68	1.00	0.94	0.81	0.68	1.00	0.94	0.81	0.68		
	ΔT	28	26	22	18	28	26	22	18	28	26	22	18	28	26	22	18	27	25	21	18	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19		
	KW	3.47	3.46	3.46	3.5	3.89	3.89	3.88	3.91	4.37	4.36	4.36	4.4	4.88	4.88	4.87	4.90	5.46	5.46	5.45	5.5	6.13	6.13	6.12	6.16	6.13	6.13	6.12	6.16	6.13	6.13	6.12	6.16	6.13	6.13	6.12	6.16		
	Amps	13.4	13.3	13.3	13.5	15.3	15.3	15.3	15.4	17.5	17.5	17.4	17.6	19.8	19.8	19.8	19.9	22.5	22.5	22.4	22.6	25.6	25.6	25.5	25.7	25.6	25.6	25.5	25.7	25.6	25.6	25.5	25.7	25.6	25.6	25.5	25.7		
	LO PR	276	277	279	284	318	319	321	326	362	364	365	370	410	411	413	418	461	463	464	469	516	517	519	524	516	517	519	524	516	517	519	524	516	517	519	524		

		OUTDOOR AMBIENT TEMPERATURE																																																																																															
		65								75								85								95								105								115																																																							
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195																																																													
85	1550	MBh	60.1	60.9	62.6	65.3	59.5	60.4	62.1	64.7	58.0	58.8	60.6	63.2	55.4	56.2	58.0	60.6	52.2	53.1	54.8	57.4	49.3	50.2	51.9	54.5	49.3	50.2	51.9	54.5	49.3	50.2	51.9	54.5	49.3	50.2	51.9	54.5																																																											
	S/T	1.00	0.88	0.75	0.62	1.00	0.88	0.76	0.62	1.00	0.91	0.78	0.65	1.00	0.93	0.81	0.68	1.00	0.95	0.83	0.70	0.6	1.00	0.97	0.85	0.72	1.00	0.99	0.87	0.73	1.00	0.99	0.87	0.73	1.00	0.99	0.87	0.73																																																											
	ΔT	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24																																																												
	KW	3.43	3.43	3.42	3.46	3.86	3.86	3.85	3.88	4.34	4.33	4.33	4.36	4.85	4.85	4.84	4.87	5.43	5.43	5.42	5.45	6.10	6.10	6.09	6.12	6.10	6.10	6.09	6.12	6.10	6.10	6.09	6.12	6.10	6.10	6.09	6.12																																																												
	Amps	13.2	13.2	13.2	13.3	15.2	15.1	15.1	15.3	17.3	17.3	17.3	17.4	19.7	19.7	19.7	19.8	22.3	22.3	22.3	22.4	25.4	25.4	25.4	25.5	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5																																																												
	LO PR	272	273	275	280	314	315	317	322	358	360	361	366	406	407	409	414	457	459	460	465	512	513	515	520	512	513	515	520	512	513	515	520	512	513	515	520																																																												
85	1750	MBh	61.0	61.8	63.6	66.2	60.5	61.3	63.0	65.7	59.0	59.8	61.5	64.2	56.4	57.2	58.9	61.6	53.2	54.0	55.7	58.4	50.3	51.1	52.8	55.5	50.3	51.1	52.8	55.5	50.3	51.1	52.8	55.5	50.3	51.1	52.8	55.5																																																											
	S/T	1.00	0.91	0.78	0.65	1.00	0.91	0.79	0.66	1.00	0.94	0.81	0.68	1.00	0.96	0.83	0.70	1.00	0.98	0.85	0.72	0.6	1.00	0.99	0.87	0.73	1.00	0.99	0.87	0.73	1.00	0.99	0.87	0.73	1.00	0.99	0.87	0.73																																																											
	ΔT	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23																																																												
	KW	3.45	3.45	3.44	3.48	3.88	3.88	3.87	3.90	4.36	4.35	4.34	4.38	4.87	4.87	4.86	4.89	5.45	5.45	5.44	5.47	6.12	6.12	6.11	6.14	6.12	6.12	6.11	6.14	6.12	6.12	6.11	6.14	6.12	6.12	6.11	6.14																																																												
	Amps	13.3	13.3	13.3	13.4	15.3	15.2	15.2	15.4	17.4	17.4	17.4	17.5	19.8	19.8	19.7	19.9	22.4	22.4	22.4	22.5	25.5	25.5	25.5	25.6	25.5	25.5	25.4	25.6	25.5	25.5	25.4	25.6	25.5	25.6	25.5	25.6																																																												
	LO PR	274	275	277	282	316	318	319	324	361	362	364	368	408	410	411	416	460	461	463	467	515	516	518	522	515	516	518	522	515	516	518	522	515	516	518	522																																																												
2000	MBh	62.5	63.3	65.0	67.7	62.0	62.8	64.5	67.2	60.4	61.3	63.0	65.6	57.8	58.7	60.4	63.0	54.7	55.5	57.2	59.9	51.7	52.6	54.3	56.9	51.7	52.6	54.3	56.9	51.7	52.6	54.3	56.9	51.7	52.6	54.3	56.9																																																												
	S/T	1.00	0.92	0.79	0.66	1.00	0.92	0.80	0.67	1.00	0.94	0.82	0.69	1.00	0.96	0.84	0.71	1.00	0.98	0.86	0.73	0.6	1.00	0.99	0.87	0.73	1.00	0.99	0.87	0.73	1.00	0.99	0.87	0.73	1.00	0.99	0.87	0.73																																																											
	ΔT	32	30	26	22	32	30	26	22	32	30	26	22	32	30	26	22	32	30	26	22	32	30	26	22	32	30	26	22	32	30	26	22	32	30	26	22																																																												
	KW	3.47	3.47	3.46	3.50	3.90	3.90	3.89	3.92	4.38	4.37	4.37	4.40	4.89	4.89	4.88	4.91	5.47	5.46	5.46	5.49	6.14	6.14	6.13	6.16	6.14	6.14	6.13	6.16	6.14	6.14	6.13	6.16	6.14	6.14	6.13	6.16																																																												
	Amps	13.4	13.4	13.3	13.5	15.3	15.3	15.3	15.4	17.5	17.5	17.5	17.6	19.9	19.9	19.8	20.0	22.5	22.5	22.5	22.6	25.6	25.6	25.6	25.7	25.6	25.6	25.5	25.7	25.6	25.6	25.5	25.7	25.6	25.6	25.5	25.7																																																												
	LO PR	277	278	280	285	319	321	322	327	364	365	367	371	411	412	414	419	463	464	466	470	518	519	521	525	518	519	521	525	518	519	521	525	518	519	521	525																																																												

GSX140181** / CA*F3636*6D* W/.051" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 600 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	18,900	13,296	5,604	1,085
80	18,675	13,302	5,373	1,137
85	18,450	13,309	5,141	1,190
90	18,225	13,356	4,869	1,223
95	18,000	13,403	4,597	1,256
100	17,550	13,309	4,241	1,285
105	17,100	13,215	3,885	1,313
110	16,470	12,780	3,690	1,338
115	15,840	12,344	3,496	1,362
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	16,680	13,269	3,411	1,203

GSX140191** / CA*F3636*6D* W/.053" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 550 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	18,900	13,041	5,859	1,160
80	18,650	13,145	5,506	1,225
85	18,400	13,248	5,152	1,290
90	18,000	13,136	4,864	1,360
95	17,600	13,024	4,576	1,430
100	17,100	12,820	4,280	1,530
105	16,600	12,616	3,984	1,590
110	16,150	12,667	3,484	1,680
115	15,700	12,717	2,983	1,770
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	17,000	12,750	4,250	1,430

GSX140241** / CA*F3636*6D* W/.057" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 725 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	24,360	16,895	7,465	1,474
80	24,070	16,904	7,166	1,526
85	23,780	16,912	6,868	1,577
90	23,490	16,972	6,518	1,623
95	23,200	17,031	6,169	1,668
100	22,620	16,912	5,708	1,707
105	22,040	16,793	5,247	1,746
110	21,228	16,239	4,989	1,779
115	20,416	15,686	4,730	1,813
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	21,498	16,861	4,637	1,596

GSX140251** / CA*F3636*6D* W/.057" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 700 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	25,500	17,085	8,415	1,570
80	25,200	17,258	7,943	1,660
85	24,900	17,430	7,470	1,750
90	24,350	17,283	7,067	1,850
95	23,800	17,136	6,664	1,950
100	23,150	16,893	6,257	2,060
105	22,500	16,650	5,850	2,170
110	21,900	16,739	5,162	2,300
115	21,300	16,827	4,473	2,430
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	23,000	16,790	6,210	1,950

GSX140301** / CA*F3642*6D* W/.067" Orifice Conditions: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	31,100	23,177	7,923	1,950
80	30,800	23,361	7,439	2,060
85	30,400	23,449	6,951	2,160
90	29,700	23,233	6,467	2,280
95	29,000	22,958	6,042	2,390
100	28,200	22,600	5,600	2,520
105	27,400	22,322	5,078	2,650
110	26,600	22,222	4,378	2,800
115	25,900	22,489	3,411	2,950
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,800	20,850	6,950	2,420

GSX140311** / CA*F3137*6D* W/.063" Orifice Conditions: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	30,700	22,718	7,982	1,920
80	30,300	22,871	7,430	2,025
85	29,900	23,023	6,877	2,130
90	29,250	22,809	6,442	2,245
95	28,600	22,594	6,006	2,360
100	27,800	22,232	5,568	2,490
105	27,000	21,870	5,130	2,620
110	26,250	21,900	4,350	2,770
115	25,500	21,930	3,570	2,920
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,600	20,080	5,520	2,360

GSX140361** / CA*F3642*6D* W/.068" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1200 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	36,700	25,690	11,010	2,330
80	36,250	25,733	10,517	2,460
85	35,800	25,776	10,024	2,590
90	35,000	25,542	9,458	2,730
95	34,200	25,308	8,892	2,870
100	33,250	24,928	8,322	3,030
105	32,300	24,548	7,752	3,190
110	31,400	24,627	6,774	3,370
115	30,500	24,705	5,795	3,550
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	33,000	24,750	8,250	2,870

GSX140371** / CA*F3137*6D* W/.071" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1100 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	36,500	25,915	10,585	2,260
80	36,050	26,130	9,921	2,400
85	35,600	26,344	9,256	2,540
90	34,800	26,092	8,708	2,675
95	34,000	25,840	8,160	2,810
100	33,050	25,439	7,611	2,970
105	32,100	25,038	7,062	3,130
110	31,250	25,135	6,115	3,315
115	30,400	25,232	5,168	3,500
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	32,800	25,256	7,544	2,810

GSX140421** / CA*F4961*6D* W/.074" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	41,800	30,932	10,868	2,600
80	41,300	31,174	10,126	2,750
85	40,800	31,416	9,384	2,900
90	39,900	31,113	8,787	3,060
95	39,000	30,810	8,190	3,220
100	37,900	30,309	7,591	3,400
105	36,800	29,808	6,992	3,580
110	35,800	30,042	5,758	3,795
115	34,800	30,276	4,524	4,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	37,600	30,080	7,520	3,220

GSX140431** / CA*F4961*6D* W/.074" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	41,800	30,932	10,868	2,600
80	41,300	31,174	10,126	2,750
85	40,800	31,416	9,384	2,900
90	39,900	31,113	8,787	3,060
95	39,000	30,810	8,190	3,220
100	37,900	30,309	7,591	3,400
105	36,800	29,808	6,992	3,580
110	35,800	30,042	5,758	3,795
115	34,800	30,276	4,524	4,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	37,600	30,080	7,520	3,220

GSX140481K / CA*F4860*6D* W/.078" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	48,300	31,878	16,422	3,080
80	47,700	32,189	15,511	3,255
85	47,100	32,500	14,600	3,430
90	46,050	32,225	13,825	3,625
95	45,000	31,950	13,050	3,820
100	43,750	31,488	12,263	4,035
105	42,500	31,025	11,475	4,250
110	41,350	31,191	10,160	4,500
115	40,200	31,356	8,844	4,750
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	43,400	31,248	12,152	3,820

GSX140601** / CA*F4961*6D* W/.088" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1550 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	61,100	40,326	20,774	3,840
80	60,350	40,725	19,625	4,080
85	59,600	41,124	18,476	4,320
90	58,300	40,512	17,788	4,575
95	57,000	39,900	17,100	4,830
100	55,400	39,318	16,082	5,120
105	53,800	38,736	15,064	5,410
110	52,350	38,965	13,386	5,745
115	50,900	39,193	11,707	6,080
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	55,000	39,050	15,950	4,840

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0181L*	ACNF25XX16A*		17,800	13,300	14.0	11.7	610	8631887
	ARUF25B14A*		17,800	13,300	14.0	11.5	610	8638981
	ASPT24B14A*+HSK		18,000	13,400	14.5	12.0	595	8638982
	ASPT25B14A*+HSK		17,800	13,300	14.5	12.0	580	8638983
	ASPT29B14A*+HSK		18,000	13,400	15.0	12.5	565	8638984
	ASPT30C14A*+HSK		18,400	13,700	14.5	12.0	630	8638985
	ASPT33C14A*+HSK		18,400	13,700	14.5	12.0	615	10206634
	AVPTC24B14A*+HSK		18,000	13,400	14.5	12.0	600	8638986
	AVPTC25B14A*		18,000	13,400	14.5	12.0	640	8996128
	AVPTC25B14A*+HSK		18,000	13,400	14.5	12.0	640	9113413
	AVPTC29B14A*		18,400	13,700	15.0	12.5	585	8996129
	AVPTC29B14A*+HSK		18,400	13,700	15.0	12.5	585	9113414
	AVPTC30C14A*+HSK		18,400	13,700	14.5	12.0	630	8638987
	AVPTC33C14A*+HSK		18,600	13,850	14.5	12.0	645	10206657
	AWUF19XX16A*		17,000	12,700	14.0	11.5	580	8631886
	AWUF31XX16A*		17,400	13,000	14.5	11.5	630	8638988
	AWUF32XX16A*		17,400	13,000	14.5	11.5	630	8638989
	CA*F3137*6A*+EEP+TXV+HSK		18,000	13,400	14.5	12.0	600	8638976
	CA*F3137*6A*+TXV+HSK	G*EC960303ANA*	17,800	13,300	15.0	12.0	650	10515971
	CA*F3137*6A*+TXV+HSK	G*EC960403ANA*	18,000	13,400	15.0	12.5	610	10515975
	CA*F3137*6A*+TXV+HSK	G*EC960603ANA*	17,800	13,300	15.0	12.2	580	10515970
	CA*F3137*6A*+TXV+HSK	G*EC960403BNA*	18,000	13,400	15.0	12.5	625	10338192
	CA*F3137*6A*+TXV+HSK	A*VC960403BNA*	18,000	13,400	15.0	12.2	620	8639014
	CA*F3137*6A*+TXV+HSK	A*VC960803BNA*	18,000	13,400	15.0	12.2	610	8639049
	CA*F3137*6A*+TXV+HSK	G*VC960403BNA*	18,000	13,400	15.0	12.2	620	8639019
	CA*F3137*6A*+TXV+HSK	G*EC960603BNA*	17,800	13,300	15.0	12.2	550	8639034
	CA*F3137*6A*+TXV+HSK	G*VC80604B*B*	18,000	13,400	15.0	12.2	620	8639082
	CA*F3137*6A*+TXV+HSK	A*VC80604B*B*	18,000	13,400	15.0	12.2	620	8639078
	CA*F3137*6A*+TXV+HSK	A*EC960803BNA*	17,800	13,300	15.0	12.2	575	8639044
	CA*F3137*6A*+TXV+HSK	G*E80603B*B*	18,000	13,400	15.0	12.2	590	8639074
	CA*F3137*6A*+TXV+HSK	A*VM970603BNA*	18,000	13,400	15.0	12.2	620	8639064
	CA*F3137*6A*+TXV+HSK	G*VM970603BNA*	18,000	13,400	15.0	12.2	620	8639069
	CA*F3137*6A*+TXV+HSK	G*VC960803BNA*	18,000	13,400	15.0	12.2	610	8639059
	CA*F3137*6A*+TXV+HSK	G*EC960402BNA*	17,800	13,300	15.0	12.2	610	8639009
	CA*F3137*6A*+TXV+HSK	A*VC960603BNA*	18,000	13,400	15.0	12.2	620	8639029
	CA*F3137*6A*+TXV+HSK	G*EC960302BNA*	17,800	13,300	15.0	12.2	605	8638999
	CA*F3137*6A*+TXV+HSK	A*EC960402BNA*	17,800	13,300	15.0	12.2	610	8639004
	CA*F3137*6A*+TXV+HSK	A*EC960302BNA*	17,800	13,300	15.0	12.2	605	8638994
	CA*F3137*6A*+TXV+HSK	G*EC960803BNA*	17,800	13,300	15.0	12.2	575	8639054
	CA*F3137*6A*+TXV+HSK	G*VC960603BNA*	18,000	13,400	15.0	12.2	620	8639039
	CA*F3137*6A*+TXV+HSK	A*EC960603BNA*	17,800	13,300	15.0	12.2	550	8639024
	CA*F3636*6D*	G*EC960303ANA*	17,800	13,300	14.5	12.0	650	10515972
	CA*F3636*6D*	G*EC960403ANA*	17,800	13,300	14.5	11.5	610	10515976
	CA*F3636*6D*	G*EC960603ANA*	17,800	13,300	14.5	11.5	580	10515968
	CA*F3636*6D*	G*EC960403BNA*	17,800	13,300	14.5	12.2	625	10338193
	CA*F3636*6D*	G*VC80603B*B*	18,000	13,800	14.5	11.5	600	9923268
	CA*F3636*6D*	G*VC80803B*B*	18,000	13,800	14.5	11.5	600	9923273
	CA*F3636*6D*	A*VC960403BNA*	18,000	13,400	14.5	11.5	620	8639013
	CA*F3636*6D*	G*EC960302BNA*	17,800	13,300	14.5	11.5	605	8638998
	CA*F3636*6D*	A*VC960603BNA*	18,000	13,400	14.5	11.5	620	8639028
	CA*F3636*6D*	G*VC80604B*B*	18,000	13,400	14.5	11.5	620	8639081
	CA*F3636*6D*	A*VC960803BNA*	18,000	13,400	14.5	11.5	610	8639048
	CA*F3636*6D*	G*VM970804CNA*	18,000	13,400	14.5	11.5	635	8639202
	CA*F3636*6D*	G*VC960403BNA*	18,000	13,400	14.5	11.5	620	8639018
	CA*F3636*6D*	A*VM970603BNA*	18,000	13,400	14.5	11.5	620	8639063
	CA*F3636*6D*	G*VM970603BNA*	18,000	13,400	14.5	11.5	620	8639068
	CA*F3636*6D*	G*VC960603BNA*	18,000	13,400	14.5	11.5	620	8639038

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0181L* (Contd.)	CA*F3636*6D*	A*EC960402BNA*	17,800	13,300	14.5	11.5	610	8639003
	CA*F3636*6D*	G*VC960803BNA*	18,000	13,400	14.5	11.5	610	8639058
	CA*F3636*6D*	A*EC960302BNA*	17,800	13,300	14.5	11.5	605	8638993
	CA*F3636*6D*	G*E80603B*B*	18,000	13,400	14.5	11.5	590	8639073
	CA*F3636*6D*	G*EC960803BNA*	17,800	13,300	14.5	11.5	575	8639053
	CA*F3636*6D*	A*EC960603BNA*	17,800	13,300	14.5	11.5	550	8639023
	CA*F3636*6D*	A*VM970804CNA*	18,000	13,400	14.5	11.5	635	8639197
	CA*F3636*6D*	G*EC960402BNA*	17,800	13,300	14.5	11.5	610	8639008
	CA*F3636*6D*	G*EC960603BNA*	17,800	13,300	14.5	11.5	550	8639033
	CA*F3636*6D*	A*VC80604B*B*	18,000	13,400	14.5	11.5	620	8639077
	CA*F3636*6D*	A*EC960803BNA*	17,800	13,300	14.5	11.5	575	8639043
	CA*F3636*6D*+EEP		17,800	13,300	14.0	11.5	600	8631885
	CA*F3636*6D*+MBVC1200**-1A*+TXV+HSK		17,800	13,300	14.5	11.5	590	8638990
	CA*F3636*6D*+TXV+HSK	G*VC80603B*B*	18,000	13,800	15.0	12.0	600	9923269
	CA*F3636*6D*+TXV+HSK	G*VC80803B*B*	18,000	13,800	15.0	12.0	600	9923274
	CA*F3743*6D*+TXV+HSK	A*VM970804CNA*	18,000	13,400	15.0	12.2	635	8639201
	CA*F3743*6D*+TXV+HSK	G*VM970804CNA*	18,000	13,400	15.0	12.2	635	8639206
	CAPT3743*4A*+EEP+HSK		17,800	13,300	14.0	11.5	600	8638977
	CAPT3743*4A*+HSK	G*EC960403BNA*	18,000	13,400	15.0	12.5	625	10338194
	CAPT3743*4A*+HSK	G*VC80603B*B*	18,000	13,800	14.5	11.5	600	9923270
	CAPT3743*4A*+HSK	G*VC80803B*B*	18,000	13,800	14.5	11.5	600	9923275
	CAPT3743*4A*+HSK	G*EC960302BNA*	17,800	13,300	14.5	11.5	605	8639000
	CAPT3743*4A*+HSK	A*VM970603BNA*	18,000	13,400	14.5	11.5	620	8639065
	CAPT3743*4A*+HSK	G*EC960803BNA*	17,800	13,300	14.5	11.5	575	8639055
	CAPT3743*4A*+HSK	G*VM970804CNA*	18,000	13,400	14.5	11.5	635	8639203
	CAPT3743*4A*+HSK	A*EC960603BNA*	17,800	13,300	14.5	11.5	550	8639025
	CAPT3743*4A*+HSK	A*EC960402BNA*	17,800	13,300	14.5	11.5	610	8639005
	CAPT3743*4A*+HSK	A*VC960803BNA*	18,000	13,400	14.5	11.5	610	8639050
	CAPT3743*4A*+HSK	G*VC960803BNA*	18,000	13,400	14.5	11.5	610	8639060
	CAPT3743*4A*+HSK	A*VC960403BNA*	18,000	13,400	14.5	11.5	620	8639015
	CAPT3743*4A*+HSK	G*VM970603BNA*	18,000	13,400	14.5	11.5	620	8639070
	CAPT3743*4A*+HSK	G*E80603B*B*	18,000	13,400	14.5	11.5	590	8639075
	CAPT3743*4A*+HSK	A*EC960803BNA*	17,800	13,300	14.5	11.5	575	8639045
	CAPT3743*4A*+HSK	G*VC80604B*B*	18,000	13,400	14.5	11.5	620	8639083
	CAPT3743*4A*+HSK	G*EC960603BNA*	17,800	13,300	14.5	11.5	550	8639035
	CAPT3743*4A*+HSK	A*VC960603BNA*	18,000	13,400	14.5	11.5	620	8639030
	CAPT3743*4A*+HSK	A*VM970804CNA*	18,000	13,400	14.5	11.5	635	8639198
	CAPT3743*4A*+HSK	A*EC960302BNA*	17,800	13,300	14.5	11.5	605	8638995
	CAPT3743*4A*+HSK	G*EC960402BNA*	17,800	13,300	14.5	11.5	610	8639010
	CAPT3743*4A*+HSK	G*VC960603BNA*	18,000	13,400	14.5	11.5	620	8639040
	CAPT3743*4A*+HSK	A*VC80604B*B*	18,000	13,400	14.5	11.5	620	8639079
	CAPT3743*4A*+HSK	G*VC960403BNA*	18,000	13,400	14.5	11.5	620	8639020
	CAPT3743*4A*+MBVC1200**-1A*+HSK		17,400	13,000	14.5	12.0	590	8638991
	CHPF2430B6C*+EEP+TXV+HSK		17,800	13,300	14.0	11.5	600	8638978
	CHPF2430B6C*+MBVC1200**-1A*+TXV+HSK		17,800	13,300	14.5	11.5	590	8638992
	CHPF2430B6C*+TXV+HSK	A*VC80604B*B*	18,000	13,400	14.5	11.5	620	8639080
	CHPF2430B6C*+TXV+HSK	G*VC80604B*B*	18,000	13,400	14.5	11.5	620	8639084
	CHPF3636B6C*+TXV+HSK	G*EC960303ANA*	17,800	13,300	14.5	12.0	650	10515973
	CHPF3636B6C*+TXV+HSK	G*EC960403ANA*	17,800	13,300	14.5	11.5	610	10515977
	CHPF3636B6C*+TXV+HSK	G*EC960603ANA*	17,800	13,300	14.5	11.5	580	10515969
	CHPF3636B6C*+TXV+HSK	G*EC960403BNA*	17,800	13,300	14.5	12.2	600	10338195
	CHPF3636B6C*+TXV+HSK	G*VC80603B*B*	18,000	13,800	14.5	11.5	600	9923271
	CHPF3636B6C*+TXV+HSK	G*VC80803B*B*	18,000	13,800	14.5	11.5	600	9923276
	CHPF3636B6C*+TXV+HSK	G*VM970603BNA*	18,000	13,400	14.5	11.5	620	8639071
	CHPF3636B6C*+TXV+HSK	A*VC960803BNA*	18,000	13,400	14.5	11.5	610	8639051
	CHPF3636B6C*+TXV+HSK	G*E80603B*B*	18,000	13,400	14.5	11.5	590	8639076
	CHPF3636B6C*+TXV+HSK	G*VC960803BNA*	18,000	13,400	14.5	11.5	610	8639061

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0181L* (Contd.)	CHPF3636B6C*+TXV+HSK	G*EC960302BNA*	17,800	13,300	14.5	11.5	605	8639001
	CHPF3636B6C*+TXV+HSK	G*EC960603BNA*	17,800	13,300	14.5	11.5	550	8639036
	CHPF3636B6C*+TXV+HSK	A*VM970603BNA*	18,000	13,400	14.5	11.5	620	8639066
	CHPF3636B6C*+TXV+HSK	G*EC960803BNA*	17,800	13,300	14.5	11.5	575	8639056
	CHPF3636B6C*+TXV+HSK	A*VC960603BNA*	18,000	13,400	14.5	11.5	620	8639031
	CHPF3636B6C*+TXV+HSK	G*VC960403BNA*	18,000	13,400	14.5	11.5	620	8639021
	CHPF3636B6C*+TXV+HSK	A*EC960603BNA*	17,800	13,300	14.5	11.5	550	8639026
	CHPF3636B6C*+TXV+HSK	G*VC960603BNA*	18,000	13,400	14.5	11.5	620	8639041
	CHPF3636B6C*+TXV+HSK	A*EC960803BNA*	17,800	13,300	14.5	11.5	575	8639046
	CHPF3636B6C*+TXV+HSK	A*VC960403BNA*	18,000	13,400	14.5	11.5	620	8639016
	CHPF3636B6C*+TXV+HSK	A*EC960402BNA*	17,800	13,300	14.5	11.5	610	8639006
	CHPF3636B6C*+TXV+HSK	G*VM970804CNA*	18,000	13,400	14.5	11.5	635	8639204
	CHPF3636B6C*+TXV+HSK	G*EC960402BNA*	17,800	13,300	14.5	11.5	610	8639011
	CHPF3636B6C*+TXV+HSK	A*VM970804CNA*	18,000	13,400	14.5	11.5	635	8639199
	CHPF3636B6C*+TXV+HSK	A*EC960302BNA*	17,800	13,300	14.5	11.5	605	8638996
	CSCF1824N6D*+TXV+HSK	G*EC960303ANA*	16,800	12,500	14.0	11.5	630	10515974
	CSCF1824N6D*+TXV+HSK	G*EC960403ANA*	17,000	12,700	14.0	11.5	610	10515978
	CSCF3036N6D*+EEP+TXV+HSK		17,800	13,300	14.0	11.5	600	8638979
	CSCF3036N6D*+TXV+HSK	G*EC960403BNA*	17,800	13,300	14.5	12.2	625	10338196
	CSCF3036N6D*+TXV+HSK	G*VC80603B*B*	18,000	13,800	14.5	12.0	600	9923272
	CSCF3036N6D*+TXV+HSK	G*VC80803B*B*	18,000	13,800	14.5	12.0	600	9923277
	CSCF3036N6D*+TXV+HSK	G*EC960302BNA*	17,800	13,300	14.5	11.5	605	8639002
	CSCF3036N6D*+TXV+HSK	A*EC960402BNA*	17,800	13,300	14.5	11.5	610	8639007
	CSCF3036N6D*+TXV+HSK	A*EC960603BNA*	17,800	13,300	14.5	11.5	550	8639027
	CSCF3036N6D*+TXV+HSK	A*VM970603BNA*	18,000	13,400	14.5	11.5	620	8639067
	CSCF3036N6D*+TXV+HSK	A*EC960302BNA*	17,800	13,300	14.5	11.5	605	8638997
	CSCF3036N6D*+TXV+HSK	G*VC960603BNA*	18,000	13,400	14.5	11.5	620	8639042
	CSCF3036N6D*+TXV+HSK	G*EC960803BNA*	17,800	13,300	14.5	11.5	575	8639057
	CSCF3036N6D*+TXV+HSK	A*VC960403BNA*	18,000	13,400	14.5	11.5	620	8639017
	CSCF3036N6D*+TXV+HSK	G*VM970603BNA*	18,000	13,400	14.5	11.5	620	8639072
	CSCF3036N6D*+TXV+HSK	A*EC960803BNA*	17,800	13,300	14.5	11.5	575	8639047
	CSCF3036N6D*+TXV+HSK	A*VM970804CNA*	18,000	13,400	14.5	11.5	635	8639200
	CSCF3036N6D*+TXV+HSK	A*VC960803BNA*	18,000	13,400	14.5	11.5	610	8639052
	CSCF3036N6D*+TXV+HSK	G*VC960403BNA*	18,000	13,400	14.5	11.5	620	8639022
	CSCF3036N6D*+TXV+HSK	G*VC960803BNA*	18,000	13,400	14.5	11.5	610	8639062
	CSCF3036N6D*+TXV+HSK	G*EC960603BNA*	17,800	13,300	14.5	11.5	550	8639037
	CSCF3036N6D*+TXV+HSK	G*EC960402BNA*	17,800	13,300	14.5	11.5	610	8639012
	CSCF3036N6D*+TXV+HSK	A*VC960603BNA*	18,000	13,400	14.5	11.5	620	8639032
	CSCF3036N6D*+TXV+HSK	G*VM970804CNA*	18,000	13,400	14.5	11.5	635	8639205
	CSCF3642N6D*+EEP+TXV+HSK		18,000	13,400	14.5	11.5	600	8638980
GSX14 0191K*	ACNF25XX16A*		17,400	12,800	14.0	12.2	610	8740456
	ARUF25B14A*		17,800	13,100	14.0	12.2	570	7984188
	ASPT25B14A*		17,800	13,100	14.5	12.2	580	8242052
	ASPT29B14A*		18,000	13,300	15.0	12.5	560	8242053
	ASPT30C14A*		18,000	13,300	15.0	12.5	600	7515731
	ASPT33C14A*		18,000	13,300	15.0	12.5	615	10206635
	AVPTC24B14A*		17,800	13,100	14.5	12.2	600	7515732
	AVPTC25B14A*		17,800	13,100	14.5	12.2	640	8996130
	AVPTC29B14A*		18,000	13,300	15.0	12.5	585	8996131
	AVPTC30C14A*		18,200	13,400	15.0	12.5	615	7515733
	AVPTC33C14A*		18,200	13,400	15.0	12.5	645	10206658
	AWUF19XX16A*		17,000	12,600	14.0	12.2	600	8033005
	AWUF31XX16A*		17,200	12,700	15.0	12.5	550	7515734
	AWUF32XX16A*		17,200	12,700	15.0	12.5	550	7515735
	CA*F3636*6D*+EEP+TXV		17,600	13,000	14.0	12.2	550	7515736
	CA*F3636*6D*+MBVC1200**-1A*+TXV		18,000	13,300	15.0	12.5	600	7515737
	CA*F3636*6D*+TXV	G*EC960303ANA*	17,400	12,200	15.0	12.5	650	10515981
	CA*F3636*6D*+TXV	G*EC960403ANA*	17,400	12,200	15.0	12.5	610	10515984
	CA*F3636*6D*+TXV	G*EC960603ANA*	17,800	12,500	15.0	12.5	580	10515979

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0191K* (Contd.)	CA*F3636*6D*+TXV	G*EC960403BNA*	17,400	12,200	15.0	12.5	625	10338197
	CA*F3636*6D*+TXV	G*VC80603B*B*	17,800	13,500	15.0	12.5	550	9923278
	CA*F3636*6D*+TXV	G*VC80803B*B*	17,800	13,500	15.0	12.5	600	9923282
	CA*F3636*6D*+TXV	G*EC960302BNA*	17,800	13,100	15.0	12.5	575	7515749
	CA*F3636*6D*+TXV	G*EC960603BNA*	17,800	13,100	15.0	12.5	500	7515751
	CA*F3636*6D*+TXV	A*EC960302BNA*	17,800	13,100	15.0	12.5	575	7515738
	CA*F3636*6D*+TXV	G*VM970804CNA*	17,800	13,100	15.0	12.5	620	7515758
	CA*F3636*6D*+TXV	A*VC960803BNA*	17,800	13,100	15.0	12.5	620	7515745
	CA*F3636*6D*+TXV	G*VM970603BNA*	17,800	13,100	15.0	12.5	625	7515757
	CA*F3636*6D*+TXV	A*VC960403BNA*	17,800	13,100	15.0	12.5	615	7515743
	CA*F3636*6D*+TXV	G*VC960603BNA*	17,800	13,100	15.0	12.5	625	7515755
	CA*F3636*6D*+TXV	A*EC960402BNA*	17,800	13,100	15.0	12.5	575	7515739
	CA*F3636*6D*+TXV	G*VC960803BNA*	17,800	13,100	15.0	12.5	620	7515756
	CA*F3636*6D*+TXV	A*VC960603BNA*	17,800	13,100	15.0	12.5	625	7515744
	CA*F3636*6D*+TXV	A*VM970804CNA*	17,800	13,100	15.0	12.5	620	7515747
	CA*F3636*6D*+TXV	G*E80603B*B*	17,800	13,100	15.0	12.5	600	7515748
	CA*F3636*6D*+TXV	A*VM970603BNA*	17,800	13,100	15.0	12.5	625	7515746
	CA*F3636*6D*+TXV	A*VC80604B*B*	17,800	13,100	15.0	12.5	620	7515742
	CA*F3636*6D*+TXV	G*EC960803BNA*	17,800	13,100	15.0	12.5	540	7515752
	CA*F3636*6D*+TXV	G*VC960403BNA*	17,800	13,100	15.0	12.5	615	7515754
	CA*F3636*6D*+TXV	A*EC960603BNA*	17,800	13,100	15.0	12.5	500	7515740
	CA*F3636*6D*+TXV	G*EC960402BNA*	17,800	13,100	15.0	12.5	575	7515750
	CA*F3636*6D*+TXV	A*EC960803BNA*	17,800	13,100	15.0	12.5	540	7515741
	CA*F3636*6D*+TXV	G*VC80604B*B*	17,800	13,100	15.0	12.5	620	7515753
	CA*F3743*6D*+EEP+TXV		18,000	13,300	14.5	12.2	550	7515759
	CAPT3743*4A*	G*EC960403BNA*	17,600	12,400	15.0	12.5	625	10338198
	CAPT3743*4A*	G*VC80603B*B*	17,800	13,500	15.0	12.5	550	9923279
	CAPT3743*4A*	G*VC80803B*B*	17,800	13,500	15.0	12.5	600	9923283
	CAPT3743*4A*	A*EC960302BNA*	17,800	13,100	15.0	12.5	575	7515762
	CAPT3743*4A*	G*EC960302BNA*	17,800	13,100	15.0	12.5	575	7515773
	CAPT3743*4A*	G*VM970603BNA*	17,800	13,100	15.0	12.5	625	7515781
	CAPT3743*4A*	G*VC960403BNA*	17,800	13,100	15.0	12.5	615	7515778
	CAPT3743*4A*	A*VC80604B*B*	17,800	13,100	15.0	12.5	620	7515766
	CAPT3743*4A*	G*EC960803BNA*	17,800	13,100	15.0	12.5	540	7515776
	CAPT3743*4A*	G*VM970804CNA*	17,800	13,100	15.0	12.5	620	7515782
	CAPT3743*4A*	G*E80603B*B*	17,800	13,100	15.0	12.5	600	7515772
	CAPT3743*4A*	G*VC960603BNA*	17,800	13,100	15.0	12.5	625	7515779
	CAPT3743*4A*	A*EC960603BNA*	17,800	13,100	15.0	12.5	500	7515764
	CAPT3743*4A*	G*VC80604B*B*	17,800	13,100	15.0	12.5	620	7515777
	CAPT3743*4A*	A*EC960402BNA*	17,800	13,100	15.0	12.5	575	7515763
	CAPT3743*4A*	A*VC960803BNA*	17,800	13,100	15.0	12.5	620	7515769
	CAPT3743*4A*	A*VM970603BNA*	17,800	13,100	15.0	12.5	625	7515770
	CAPT3743*4A*	A*VC960603BNA*	17,800	13,100	15.0	12.5	625	7515768
	CAPT3743*4A*	A*VM970804CNA*	17,800	13,100	15.0	12.5	620	7515771
	CAPT3743*4A*	G*EC960603BNA*	17,800	13,100	15.0	12.5	500	7515775
	CAPT3743*4A*	A*EC960803BNA*	17,800	13,100	15.0	12.5	540	7515765
	CAPT3743*4A*	G*EC960402BNA*	17,800	13,100	15.0	12.5	575	7515774
	CAPT3743*4A*	G*VC960803BNA*	17,800	13,100	15.0	12.5	620	7515780
	CAPT3743*4A*	A*VC960403BNA*	17,800	13,100	15.0	12.5	615	7515767
	CAPT3743*4A*+EEP		17,600	13,000	14.0	12.2	550	7515760
	CAPT3743*4A*+MBVC1200**-1A*		17,800	13,100	15.0	12.5	600	7515761
	CHPF3636B6C*+EEP+TXV		17,600	13,000	14.5	12.2	550	7515783
	CHPF3636B6C*+MBVC1200**-1A*+TXV		18,200	13,400	15.0	12.5	600	7515784
	CHPF3636B6C*+TXV	G*EC960303ANA*	17,800	12,500	15.0	12.5	650	10515982
	CHPF3636B6C*+TXV	G*EC960403ANA*	17,400	12,200	15.0	12.5	610	10515985
	CHPF3636B6C*+TXV	G*EC960603ANA*	17,800	12,500	15.0	12.5	580	10515980
	CHPF3636B6C*+TXV	G*EC960403BNA*	17,400	12,200	15.0	12.5	600	10338199
	CHPF3636B6C*+TXV	G*VC80603B*B*	17,800	13,500	15.0	12.5	550	9923280
	CHPF3636B6C*+TXV	G*VC80803B*B*	17,800	13,500	15.0	12.5	600	9923284

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0191K* (Contd.)	CHPF3636B6C*+TXV	A*EC960603BNA*	17,800	13,100	15.0	12.5	500	7515787
	CHPF3636B6C*+TXV	G*EC960603BNA*	17,800	13,100	15.0	12.5	500	7515798
	CHPF3636B6C*+TXV	A*EC960803BNA*	17,800	13,100	15.0	12.5	540	7515788
	CHPF3636B6C*+TXV	G*EC960302BNA*	17,800	13,100	15.0	12.5	575	7515796
	CHPF3636B6C*+TXV	G*EC960402BNA*	17,800	13,100	15.0	12.5	575	7515797
	CHPF3636B6C*+TXV	A*VM970804CNA*	17,800	13,100	15.0	12.5	620	7515794
	CHPF3636B6C*+TXV	G*VC960403BNA*	17,800	13,100	15.0	12.5	615	7515801
	CHPF3636B6C*+TXV	A*VM970603BNA*	17,800	13,100	15.0	12.5	625	7515793
	CHPF3636B6C*+TXV	G*E80603B*B*	17,800	13,100	15.0	12.5	600	7515795
	CHPF3636B6C*+TXV	G*VC960803BNA*	17,800	13,100	15.0	12.5	620	7515803
	CHPF3636B6C*+TXV	G*VM970804CNA*	17,800	13,100	15.0	12.5	620	7515805
	CHPF3636B6C*+TXV	A*VC960603BNA*	17,800	13,100	15.0	12.5	625	7515791
	CHPF3636B6C*+TXV	A*EC960302BNA*	17,800	13,100	15.0	12.5	575	7515785
	CHPF3636B6C*+TXV	G*EC960803BNA*	17,800	13,100	15.0	12.5	540	7515799
	CHPF3636B6C*+TXV	A*VC960403BNA*	17,800	13,100	15.0	12.5	615	7515790
	CHPF3636B6C*+TXV	G*VM970603BNA*	17,800	13,100	15.0	12.5	625	7515804
	CHPF3636B6C*+TXV	A*VC80604B*B*	17,800	13,100	15.0	12.5	620	7515789
	CHPF3636B6C*+TXV	A*EC960402BNA*	17,800	13,100	15.0	12.5	575	7515786
	CHPF3636B6C*+TXV	G*VC80604B*B*	17,800	13,100	15.0	12.5	620	7515800
	CHPF3636B6C*+TXV	A*VC960803BNA*	17,800	13,100	15.0	12.5	620	7515792
	CHPF3636B6C*+TXV	G*VC960603BNA*	17,800	13,100	15.0	12.5	625	7515802
	CSCF1824N6D*+TXV	G*EC960303ANA*	16,800	11,800	14.0	12.2	630	10515983
	CSCF1824N6D*+TXV	G*EC960403ANA*	16,800	11,800	14.5	12.2	610	10515986
	CSCF3036N6D*+EEP+TXV		17,600	13,000	14.0	12.2	550	7515806
	CSCF3036N6D*+TXV	G*VC80603B*B*	17,800	13,500	15.0	12.5	550	9923281
	CSCF3036N6D*+TXV	G*VC80803B*B*	17,800	13,500	15.0	12.5	600	9923285
	CSCF3036N6D*+TXV	G*VC960603BNA*	17,800	13,100	15.0	12.5	625	7515815
	CSCF3036N6D*+TXV	A*VC960803BNA*	17,800	13,100	15.0	12.5	620	7515810
	CSCF3036N6D*+TXV	A*VC80604B*B*	17,800	13,100	15.0	12.5	620	7515807
	CSCF3036N6D*+TXV	A*VC960403BNA*	17,800	13,100	15.0	12.5	615	7515808
	CSCF3036N6D*+TXV	G*VM970804CNA*	17,800	13,100	15.0	12.5	620	7515818
	CSCF3036N6D*+TXV	G*VM970603BNA*	17,800	13,100	15.0	12.5	625	7515817
	CSCF3036N6D*+TXV	G*VC960803BNA*	17,800	13,100	15.0	12.5	620	7515816
	CSCF3036N6D*+TXV	A*VM970603BNA*	17,800	13,100	15.0	12.5	625	7515811
	CSCF3036N6D*+TXV	A*VM970804CNA*	17,800	13,100	15.0	12.5	620	7515812
	CSCF3036N6D*+TXV	G*VC960403BNA*	17,800	13,100	15.0	12.5	615	7515814
	CSCF3036N6D*+TXV	G*VC80604B*B*	17,800	13,100	15.0	12.5	620	7515813
	CSCF3036N6D*+TXV	A*VC960603BNA*	17,800	13,100	15.0	12.5	625	7515809
	CSCF3642N6D*+TXV	G*EC960403BNA*	18,000	12,700	15.0	12.5	625	10338200
	CSCF3642N6D*+TXV	A*EC960603BNA*	17,800	13,100	15.0	12.5	500	7515821
	CSCF3642N6D*+TXV	G*EC960803BNA*	17,800	13,100	15.0	12.5	540	7515826
	CSCF3642N6D*+TXV	G*EC960302BNA*	17,800	13,100	15.0	12.5	575	7515823
	CSCF3642N6D*+TXV	A*EC960402BNA*	17,800	13,100	15.0	12.5	575	7515820
	CSCF3642N6D*+TXV	G*EC960402BNA*	17,800	13,100	15.0	12.5	575	7515824
	CSCF3642N6D*+TXV	G*EC960603BNA*	17,800	13,100	15.0	12.5	500	7515825
	CSCF3642N6D*+TXV	A*EC960803BNA*	17,800	13,100	15.0	12.5	540	7515822
	CSCF3642N6D*+TXV	A*EC960302BNA*	17,800	13,100	15.0	12.5	575	7515819
GSX14 0241L*	ACNF25XX16A*		22,800	16,700	14.0	11.7	710	8631967
	ARUF24B14C*+TXV		23,000	16,900	14.0	11.5	800	9084673
	ARUF24B14C*+TXV+HSK		23,000	16,900	14.0	11.5	800	9113417
	ARUF29B14A*		23,600	17,300	14.0	11.5	720	8655532
	ARUF30B14A*+TXV		23,400	17,200	14.0	11.5	800	9084674
	ARUF30B14A*+TXV+HSK		23,400	17,200	14.0	11.5	800	9113418
	ARUF31B14A*		23,600	17,300	14.0	11.5	760	8655533
	ASPT24B14A*+HSK		23,000	16,900	14.0	11.5	740	8655534
	ASPT25B14A*+HSK		23,000	16,900	14.5	12.0	725	8655535
	ASPT29B14A*+HSK		23,600	17,300	15.0	12.5	745	8655536
	ASPT30C14A*+HSK		23,600	17,300	14.5	12.0	745	8655537
	ASPT33C14A*+HSK		23,600	17,300	14.5	12.0	820	10206636

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0241L* (Contd.)	AVPTC24B14A*+HSK		23,000	16,900	14.0	11.5	600	8655976
	AVPTC25B14A*		23,000	16,900	14.5	12.0	850	8996132
	AVPTC25B14A*+HSK		23,000	16,900	14.5	12.0	850	9113415
	AVPTC29B14A*		23,600	17,300	15.0	12.5	795	8996133
	AVPTC29B14A*+HSK		23,600	17,300	15.0	12.5	795	9113416
	AVPTC30C14A*+HSK		23,600	17,300	14.5	12.0	680	8655538
	AVPTC33C14A*+HSK		23,600	17,300	14.5	12.0	785	10206659
	AWUF25XX16A*		22,000	16,100	14.0	11.5	750	8631966
	AWUF31XX16A*		23,000	16,900	14.5	11.5	725	8655539
	AWUF32XX16A*		23,000	16,900	14.5	11.5	725	8655540
	CA*F3137*6A*	G*EC960303ANA*	23,400	16,600	14.5	12.0	800	10515990
	CA*F3137*6A*	G*EC960403ANA*	23,400	16,600	14.5	11.5	800	10515997
	CA*F3137*6A*	G*EC960603ANA*	23,400	16,600	14.5	11.5	775	10515987
	CA*F3137*6A*	G*EC960403BNA*	23,800	16,900	14.5	12.2	800	10338201
	CA*F3137*6A*	G*VC80603B*B*	23,600	17,800	14.5	11.5	750	9923286
	CA*F3137*6A*	G*VC80803B*B*	23,600	17,800	14.5	11.5	750	9923295
	CA*F3137*6A*	G*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655694
	CA*F3137*6A*	A*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655546
	CA*F3137*6A*	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655602
	CA*F3137*6A*	A*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655642
	CA*F3137*6A*	A*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655686
	CA*F3137*6A*	G*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655742
	CA*F3137*6A*	A*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655562
	CA*F3137*6A*	A*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655610
	CA*F3137*6A*	A*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655578
	CA*F3137*6A*	A*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655720
	CA*F3137*6A*	G*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655678
	CA*F3137*6A*	G*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655650
	CA*F3137*6A*	G*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655618
	CA*F3137*6A*	A*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655736
	CA*F3137*6A*	A*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655626
	CA*F3137*6A*	G*E80603B*B*	23,600	17,300	14.5	11.5	735	8655714
	CA*F3137*6A*	G*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655586
	CA*F3137*6A*	G*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655634
	CA*F3137*6A*	G*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655554
	CA*F3137*6A*	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655594
	CA*F3137*6A*	G*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655728
	CA*F3137*6A*	G*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655570
	CA*F3137*6A*	A*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655670
	CA*F3137*6A*+EHP		23,600	17,300	14.0	11.5	725	8655521
	CA*F3137*6A*+EHP+TXV+HSK		23,600	17,300	14.5	12.0	725	8655522
	CA*F3137*6A*+TXV+HSK	G*EC960303ANA*	23,400	16,600	15.0	12.0	800	10515991
	CA*F3137*6A*+TXV+HSK	G*EC960403ANA*	23,400	16,600	15.0	12.0	800	10515998
	CA*F3137*6A*+TXV+HSK	G*EC960603ANA*	23,400	16,600	15.0	12.2	775	10515988
	CA*F3137*6A*+TXV+HSK	G*EC960403BNA*	23,800	16,900	15.0	12.5	800	10338202
	CA*F3137*6A*+TXV+HSK	G*VC80603B*B*	23,600	17,800	15.0	12.2	750	9923287
	CA*F3137*6A*+TXV+HSK	G*VC80803B*B*	23,600	17,800	15.0	12.2	750	9923296
	CA*F3137*6A*+TXV+HSK	A*VC960803BNA*	23,600	17,300	15.0	12.2	740	8655643
	CA*F3137*6A*+TXV+HSK	G*VM970803BNA*	23,600	17,300	15.0	12.2	740	8655695
	CA*F3137*6A*+TXV+HSK	A*VM970603BNA*	23,600	17,300	15.0	12.2	745	8655671
	CA*F3137*6A*+TXV+HSK	G*EC960603BNA*	23,400	17,200	15.0	12.2	725	8655603
	CA*F3137*6A*+TXV+HSK	A*EC960402BNA*	23,400	17,200	14.5	12.0	710	8655563
	CA*F3137*6A*+TXV+HSK	A*EC960803BNA*	23,400	17,200	15.0	12.2	735	8655627
	CA*F3137*6A*+TXV+HSK	A*VC960603BNA*	23,600	17,300	15.0	12.2	745	8655611
	CA*F3137*6A*+TXV+HSK	G*VM970603BNA*	23,600	17,300	15.0	12.2	745	8655679
	CA*F3137*6A*+TXV+HSK	A*EC960302BNA*	23,400	17,200	15.0	12.2	745	8655547
	CA*F3137*6A*+TXV+HSK	A*EC960603BNA*	23,400	17,200	15.0	12.2	725	8655595
	CA*F3137*6A*+TXV+HSK	G*EC960302BNA*	23,400	17,200	15.0	12.2	745	8655555
	CA*F3137*6A*+TXV+HSK	G*E80603B*B*	23,600	17,300	15.0	12.2	735	8655715

See Notes on Page 71..

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0241L* (Contd.)	CA*F3137*6A*+TXV+HSK	G*EC960803BNA*	23,400	17,200	15.0	12.2	735	8655635
	CA*F3137*6A*+TXV+HSK	A*VM970803BNA*	23,600	17,300	15.0	12.2	740	8655687
	CA*F3137*6A*+TXV+HSK	A*VC80604B*B*	23,600	17,300	15.0	12.2	745	8655721
	CA*F3137*6A*+TXV+HSK	G*VC960803BNA*	23,600	17,300	15.0	12.2	740	8655651
	CA*F3137*6A*+TXV+HSK	G*EC960402BNA*	23,400	17,200	14.5	12.0	710	8655571
	CA*F3137*6A*+TXV+HSK	G*VC960603BNA*	23,600	17,300	15.0	12.2	745	8655619
	CA*F3137*6A*+TXV+HSK	G*VC80604B*B*	23,600	17,300	15.0	12.2	745	8655729
	CA*F3137*6A*+TXV+HSK	A*VC960403BNA*	23,600	17,300	15.0	12.2	750	8655579
	CA*F3137*6A*+TXV+HSK	G*VC80805C*B*	23,600	17,300	15.0	12.2	740	8655743
	CA*F3137*6A*+TXV+HSK	G*VC960403BNA*	23,600	17,300	15.0	12.2	750	8655587
	CA*F3137*6A*+TXV+HSK	A*VC80805C*B*	23,600	17,300	15.0	12.2	740	8655737
	CA*F3636*6D*	G*EC960303ANA*	23,400	16,600	14.5	12.0	800	10515992
	CA*F3636*6D*	G*EC960403ANA*	23,200	16,400	14.5	11.5	800	10515999
	CA*F3636*6D*	G*EC960603ANA*	23,400	16,600	14.5	11.5	775	10515989
	CA*F3636*6D*	G*EC960403BNA*	23,200	16,400	14.5	12.2	800	10338203
	CA*F3636*6D*	G*VC80603B*B*	23,600	17,800	14.5	11.5	750	9923288
	CA*F3636*6D*	G*VC80803B*B*	23,600	17,800	14.5	11.5	750	9923297
	CA*F3636*6D*	G*VC80804C*B*	23,600	17,800	14.5	11.5	800	9923304
	CA*F3636*6D*	G*VC80805D*B*	23,600	17,800	14.5	11.5	800	9923308
	CA*F3636*6D*	G*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655727
	CA*F3636*6D*	A*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655719
	CA*F3636*6D*	A*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655577
	CA*F3636*6D*	A*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655735
	CA*F3636*6D*	G*E80603B*B*	23,600	17,300	14.5	11.5	735	8655713
	CA*F3636*6D*	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655601
	CA*F3636*6D*	A*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655609
	CA*F3636*6D*	A*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655669
	CA*F3636*6D*	A*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655625
	CA*F3636*6D*	G*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655553
	CA*F3636*6D*	G*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655677
	CA*F3636*6D*	G*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655633
	CA*F3636*6D*	A*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655561
	CA*F3636*6D*	A*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655641
	CA*F3636*6D*	G*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655663
	CA*F3636*6D*	A*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655685
	CA*F3636*6D*	G*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655649
	CA*F3636*6D*	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655593
	CA*F3636*6D*	A*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655657
	CA*F3636*6D*	A*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655545
	CA*F3636*6D*	G*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655617
	CA*F3636*6D*	G*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655741
	CA*F3636*6D*	G*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655569
	CA*F3636*6D*	G*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655707
	CA*F3636*6D*	G*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655693
	CA*F3636*6D*	G*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655585
	CA*F3636*6D*	A*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655701
	CA*F3636*6D*+EEP		23,200	17,000	14.0	11.5	725	8655519
	CA*F3636*6D*+EEP+TXV+HSK		23,200	17,000	14.0	11.5	725	8631965
	CA*F3636*6D*+MBVC1200**-1A*		23,600	17,300	14.5	12.0	735	8655541
	CA*F3636*6D*+TXV+HSK	G*EC960303ANA*	23,400	16,600	14.5	12.0	800	10515993
	CA*F3636*6D*+TXV+HSK	G*EC960403ANA*	23,200	16,400	15.0	12.0	800	10516000
	CA*F3636*6D*+TXV+HSK	G*EC960603ANA*	23,400	16,600	14.5	11.5	750	10516004
	CA*F3636*6D*+TXV+HSK	G*EC960403BNA*	23,200	16,400	15.0	12.2	800	10338204
	CA*F3636*6D*+TXV+HSK	G*VC80603B*B*	23,600	17,800	14.5	11.5	750	9923289
	CA*F3636*6D*+TXV+HSK	G*VC80803B*B*	23,600	17,800	14.5	11.5	750	9923298
	CA*F3636*6D*+TXV+HSK	G*VC80804C*B*	23,600	17,800	14.5	11.5	800	9923305
	CA*F3636*6D*+TXV+HSK	G*VC80805D*B*	23,600	17,800	14.5	11.5	750	9923309
	CA*F3636*6D*+TXV+HSK	A*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655734
	CA*F3636*6D*+TXV+HSK	G*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655568

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0241L* (Contd.)	CA*F3636*6D*+TXV+HSK	A*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655668
	CA*F3636*6D*+TXV+HSK	G*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655676
	CA*F3636*6D*+TXV+HSK	A*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655560
	CA*F3636*6D*+TXV+HSK	G*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655662
	CA*F3636*6D*+TXV+HSK	A*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655640
	CA*F3636*6D*+TXV+HSK	A*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655576
	CA*F3636*6D*+TXV+HSK	A*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655624
	CA*F3636*6D*+TXV+HSK	G*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655706
	CA*F3636*6D*+TXV+HSK	G*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655632
	CA*F3636*6D*+TXV+HSK	G*E80603B*B*	23,600	17,300	14.5	11.5	735	8655712
	CA*F3636*6D*+TXV+HSK	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655600
	CA*F3636*6D*+TXV+HSK	A*VM970804CNA*	23,600	17,300	14.5	11.5	760	8655700
	CA*F3636*6D*+TXV+HSK	A*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655656
	CA*F3636*6D*+TXV+HSK	G*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655726
	CA*F3636*6D*+TXV+HSK	G*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655692
	CA*F3636*6D*+TXV+HSK	G*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655648
	CA*F3636*6D*+TXV+HSK	A*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655544
	CA*F3636*6D*+TXV+HSK	G*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655584
	CA*F3636*6D*+TXV+HSK	G*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655740
	CA*F3636*6D*+TXV+HSK	G*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655616
	CA*F3636*6D*+TXV+HSK	G*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655552
	CA*F3636*6D*+TXV+HSK	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655592
	CA*F3636*6D*+TXV+HSK	A*VC80604B*B*	23,600	17,300	14.5	11.5	755	8655718
	CA*F3636*6D*+TXV+HSK	A*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655608
	CA*F3636*6D*+TXV+HSK	A*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655684
	CA*F3642*6D*+EEP		23,600	17,300	14.0	11.5	725	8655520
	CA*F3743*6D*	A*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655702
	CA*F3743*6D*	A*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655658
	CA*F3743*6D*	G*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655664
	CA*F3743*6D*	G*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655708
	CA*F3743*6D*+TXV+HSK	G*VC960804CNA*	23,600	17,300	14.5	12.0	760	8655665
	CA*F3743*6D*+TXV+HSK	G*VM970804CNA*	23,600	17,300	14.5	12.0	795	8655709
	CA*F3743*6D*+TXV+HSK	A*VC960804CNA*	23,600	17,300	14.5	12.0	760	8655659
	CA*F3743*6D*+TXV+HSK	A*VM970804CNA*	23,600	17,300	14.5	12.0	795	8655703
	CAPT3743*4A*+EEP+HSK		23,000	16,900	14.0	11.5	725	8655523
	CAPT3743*4A*+HSK	G*VC80603B*B*	23,600	17,800	14.5	11.5	750	9923290
	CAPT3743*4A*+HSK	G*VC80803B*B*	23,600	17,800	14.5	11.5	750	9923299
	CAPT3743*4A*+MBVC1200**-1A*+HSK		23,600	17,300	14.5	12.0	735	8655542
	CHPF2430B6C*+TXV	A*EH800603B*A*	23,400	17,200	14.0	11.5	775	9101237
	CHPF2430B6C*+TXV+HSK	A*EH800603B*A*	23,400	17,200	14.0	11.5	775	9113419
	CHPF3636B6C*	G*EC960303ANA*	23,400	16,600	14.5	12.0	750	10515994
	CHPF3636B6C*	G*EC960403ANA*	23,200	16,400	14.5	11.5	750	10516001
	CHPF3636B6C*	G*EC960603ANA*	23,400	16,600	14.5	11.5	700	10516005
	CHPF3636B6C*	G*EC960403BNA*	23,200	16,400	14.5	12.2	725	10338205
	CHPF3636B6C*	G*VC80603B*B*	23,600	17,800	14.5	11.5	750	9923291
	CHPF3636B6C*	G*VC80803B*B*	23,600	17,800	14.5	11.5	750	9923300
	CHPF3636B6C*	A*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655580
	CHPF3636B6C*	G*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655680
	CHPF3636B6C*	G*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655620
	CHPF3636B6C*	A*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655564
	CHPF3636B6C*	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655596
	CHPF3636B6C*	G*E80603B*B*	23,600	17,300	14.5	11.5	735	8655716
	CHPF3636B6C*	A*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655722
	CHPF3636B6C*	G*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655556
	CHPF3636B6C*	A*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655688
	CHPF3636B6C*	G*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655730
	CHPF3636B6C*	A*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655548
	CHPF3636B6C*	G*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655636
	CHPF3636B6C*	A*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655628

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0241L* (Contd.)	CHPF3636B6C*	A*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655612
	CHPF3636B6C*	G*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655652
	CHPF3636B6C*	A*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655644
	CHPF3636B6C*	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655604
	CHPF3636B6C*	A*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655672
	CHPF3636B6C*	G*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655588
	CHPF3636B6C*	G*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655696
	CHPF3636B6C*	G*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655572
	CHPF3636B6C*+EEP		23,600	17,300	14.0	11.5	725	8655524
	CHPF3636B6C*+EEP+TXV+HSK		23,600	17,300	14.5	11.5	725	8655525
	CHPF3636B6C*+MBVC1200**-1A*		23,600	17,300	14.5	12.0	735	8655543
	CHPF3636B6C*+TXV	A*EH800603B*A*	23,400	17,200	14.0	11.5	775	9101239
	CHPF3636B6C*+TXV+HSK	G*EC960303ANA*	23,400	16,600	14.5	12.0	750	10515995
	CHPF3636B6C*+TXV+HSK	G*EC960403ANA*	23,200	16,400	15.0	12.0	750	10516002
	CHPF3636B6C*+TXV+HSK	G*EC960603ANA*	23,400	16,600	14.5	11.5	700	10516006
	CHPF3636B6C*+TXV+HSK	G*EC960403BNA*	23,200	16,400	15.0	12.5	725	10338206
	CHPF3636B6C*+TXV+HSK	G*VC80603B*B*	23,600	17,800	14.5	11.5	750	9923292
	CHPF3636B6C*+TXV+HSK	G*VC80803B*B*	23,600	17,800	14.5	11.5	750	9923301
	CHPF3636B6C*+TXV+HSK	A*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655673
	CHPF3636B6C*+TXV+HSK	A*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655565
	CHPF3636B6C*+TXV+HSK	G*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655653
	CHPF3636B6C*+TXV+HSK	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655597
	CHPF3636B6C*+TXV+HSK	A*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655613
	CHPF3636B6C*+TXV+HSK	A*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655629
	CHPF3636B6C*+TXV+HSK	A*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655689
	CHPF3636B6C*+TXV+HSK	G*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655621
	CHPF3636B6C*+TXV+HSK	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655605
	CHPF3636B6C*+TXV+HSK	A*EH800603B*A*	23,400	17,200	14.0	11.5	775	9113420
	CHPF3636B6C*+TXV+HSK	G*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655557
	CHPF3636B6C*+TXV+HSK	G*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655573
	CHPF3636B6C*+TXV+HSK	G*E80603B*B*	23,600	17,300	14.5	11.5	735	8655717
	CHPF3636B6C*+TXV+HSK	G*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655681
	CHPF3636B6C*+TXV+HSK	A*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655645
	CHPF3636B6C*+TXV+HSK	G*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655731
	CHPF3636B6C*+TXV+HSK	G*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655697
	CHPF3636B6C*+TXV+HSK	A*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655581
	CHPF3636B6C*+TXV+HSK	G*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655589
	CHPF3636B6C*+TXV+HSK	A*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655723
	CHPF3636B6C*+TXV+HSK	G*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655637
	CHPF3636B6C*+TXV+HSK	A*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655549
	CHPF3642C6C*+EEP		23,600	17,300	14.0	11.5	725	8655526
	CHPF3642C6C*+EEP+TXV+HSK		23,600	17,300	14.5	11.5	725	8655527
	CSCF1824N6D*+TXV+HSK	G*EC960303ANA*	22,000	15,600	14.0	11.5	800	10515996
	CSCF1824N6D*+TXV+HSK	G*EC960403ANA*	22,000	15,600	14.0	11.5	800	10516003
	CSCF1824N6D*+TXV+HSK	G*EC960603ANA*	22,400	15,900	14.5	11.5	750	10516007
	CSCF3036N6D*	G*EC960403BNA*	23,600	16,700	14.5	12.2	800	10338207
	CSCF3036N6D*	G*VC80603B*B*	23,000	17,400	14.5	11.5	750	9923293
	CSCF3036N6D*	G*VC80803B*B*	23,000	17,400	14.5	11.5	750	9923302
	CSCF3036N6D*	G*VC80804C*B*	23,600	17,800	14.5	11.5	800	9923306
	CSCF3036N6D*	G*VC80805D*B*	23,600	17,800	14.5	11.5	750	9923310
	CSCF3036N6D*	G*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655667
	CSCF3036N6D*	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655607
	CSCF3036N6D*	G*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655591
	CSCF3036N6D*	A*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655551
	CSCF3036N6D*	G*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655559
	CSCF3036N6D*	A*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655675
	CSCF3036N6D*	A*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655567
	CSCF3036N6D*	A*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655725
	CSCF3036N6D*	A*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655583

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0241L* (Contd.)	CSCF3036N6D*	A*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655647
	CSCF3036N6D*	G*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655733
	CSCF3036N6D*	A*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655739
	CSCF3036N6D*	A*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655691
	CSCF3036N6D*	G*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655745
	CSCF3036N6D*	A*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655705
	CSCF3036N6D*	G*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655575
	CSCF3036N6D*	G*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655699
	CSCF3036N6D*	G*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655639
	CSCF3036N6D*	G*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655655
	CSCF3036N6D*	A*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655615
	CSCF3036N6D*	G*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655711
	CSCF3036N6D*	A*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655631
	CSCF3036N6D*	G*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655683
	CSCF3036N6D*	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655599
	CSCF3036N6D*	G*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655623
	CSCF3036N6D*	A*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655661
	CSCF3036N6D*+EEP		23,600	17,300	14.0	11.5	725	8655528
	CSCF3036N6D*+EEP+TXV+HSK		23,600	17,300	14.0	11.5	725	8655529
	CSCF3036N6D*+TXV+HSK	G*EC960403BNA*	23,600	16,700	15.0	12.5	800	10338208
	CSCF3036N6D*+TXV+HSK	G*VC80603B*B*	23,600	17,800	14.5	11.5	750	9923294
	CSCF3036N6D*+TXV+HSK	G*VC80803B*B*	23,600	17,800	14.5	11.5	750	9923303
	CSCF3036N6D*+TXV+HSK	G*VC80804C*B*	23,600	17,800	14.5	11.5	800	9923307
	CSCF3036N6D*+TXV+HSK	G*VC80805D*B*	23,600	17,800	14.5	11.5	750	9923311
	CSCF3036N6D*+TXV+HSK	G*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655732
	CSCF3036N6D*+TXV+HSK	A*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655614
	CSCF3036N6D*+TXV+HSK	A*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655646
	CSCF3036N6D*+TXV+HSK	A*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655674
	CSCF3036N6D*+TXV+HSK	G*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655558
	CSCF3036N6D*+TXV+HSK	G*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655744
	CSCF3036N6D*+TXV+HSK	G*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655698
	CSCF3036N6D*+TXV+HSK	G*VC960803BNA*	23,600	17,300	14.5	11.5	740	8655654
	CSCF3036N6D*+TXV+HSK	G*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655638
	CSCF3036N6D*+TXV+HSK	A*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655704
	CSCF3036N6D*+TXV+HSK	G*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655590
	CSCF3036N6D*+TXV+HSK	A*EC960803BNA*	23,400	17,200	14.5	11.5	735	8655630
	CSCF3036N6D*+TXV+HSK	A*EC960302BNA*	23,400	17,200	14.5	11.5	745	8655550
	CSCF3036N6D*+TXV+HSK	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655606
	CSCF3036N6D*+TXV+HSK	A*VC80805C*B*	23,600	17,300	14.5	11.5	740	8655738
	CSCF3036N6D*+TXV+HSK	G*VM970804CNA*	23,600	17,300	14.5	11.5	795	8655710
	CSCF3036N6D*+TXV+HSK	A*VC80604B*B*	23,600	17,300	14.5	11.5	745	8655724
	CSCF3036N6D*+TXV+HSK	G*VC960603BNA*	23,600	17,300	14.5	11.5	745	8655622
	CSCF3036N6D*+TXV+HSK	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8655598
	CSCF3036N6D*+TXV+HSK	A*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655566
	CSCF3036N6D*+TXV+HSK	G*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655666
	CSCF3036N6D*+TXV+HSK	G*EC960402BNA*	23,400	17,200	14.5	11.5	710	8655574
	CSCF3036N6D*+TXV+HSK	A*VM970803BNA*	23,600	17,300	14.5	11.5	740	8655690
	CSCF3036N6D*+TXV+HSK	A*VC960403BNA*	23,600	17,300	14.5	11.5	750	8655582
	CSCF3036N6D*+TXV+HSK	A*VC960804CNA*	23,600	17,300	14.5	11.5	760	8655660
	CSCF3036N6D*+TXV+HSK	G*VM970603BNA*	23,600	17,300	14.5	11.5	745	8655682
	CSCF3642N6D*+EEP		23,600	17,300	14.0	11.5	725	8655530
	CSCF3642N6D*+EEP+TXV+HSK		23,600	17,300	14.0	11.5	725	8655531
GSX14 0251L*	ACNF25XX16A*		22,800	16,400	14.0	12.2	710	8740458
	ARUF29B14A*		23,600	16,900	14.0	12.2	860	8711404
	ARUF31B14A*		23,600	16,900	14.0	12.2	870	8711405
	ASPT25B14A*		23,600	16,900	14.5	12.2	800	8711407
	ASPT29B14A*		24,000	17,200	15.0	12.5	790	8711408
	ASPT30C14A*		23,600	16,900	15.0	12.5	845	8711409
	ASPT33C14A*		24,000	17,200	15.0	12.5	820	10206637

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0251L* (Contd.)	AVPTC24B14A*		23,000	16,500	14.0	12.2	795	8711410
	AVPTC25B14A*		23,200	16,700	14.5	12.2	850	8996134
	AVPTC29B14A*		23,800	17,100	15.0	12.5	795	8996135
	AVPTC30C14A*		23,600	16,900	15.0	12.5	780	8711411
	AVPTC33C14A*		24,000	17,200	15.0	12.5	785	10206660
	AWUF25XX16A*		22,000	15,800	14.0	12.2	750	8711412
	AWUF31XX16A*		23,000	16,500	14.5	12.2	800	8711413
	AWUF32XX16A*		23,000	16,500	14.5	12.2	800	8711414
	CA*F3636*6D*	G*EC960303ANA*	23,400	16,800	14.5	12.2	800	10516012
	CA*F3636*6D*	G*EC960403ANA*	23,400	16,800	14.5	12.2	800	10516017
	CA*F3636*6D*	G*EC960603ANA*	23,400	16,800	14.5	12.2	750	10516008
	CA*F3636*6D*	G*EC960403BNA*	23,600	16,900	14.5	12.2	800	10338209
	CA*F3636*6D*	G*VC80603B*B*	23,600	17,400	15.0	12.5	750	9923312
	CA*F3636*6D*	G*VC80803B*B*	23,600	17,400	15.0	12.5	750	9923317
	CA*F3636*6D*	G*VC80804C*B*	23,600	17,400	15.0	12.5	800	9923322
	CA*F3636*6D*	G*VC80805D*B*	23,600	17,400	15.0	12.5	800	9923327
	CA*F3636*6D*	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711433
	CA*F3636*6D*	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711420
	CA*F3636*6D*	G*VC960803BNA*	23,600	16,900	15.0	12.5	820	8711437
	CA*F3636*6D*	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711422
	CA*F3636*6D*	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711436
	CA*F3636*6D*	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711432
	CA*F3636*6D*	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711439
	CA*F3636*6D*	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711425
	CA*F3636*6D*	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711421
	CA*F3636*6D*	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711430
	CA*F3636*6D*	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711419
	CA*F3636*6D*	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711426
	CA*F3636*6D*	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711416
	CA*F3636*6D*	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711438
	CA*F3636*6D*	A*VC960803BNA*	23,600	16,900	15.0	12.5	820	8711423
	CA*F3636*6D*	A*EC960603BNA*	23,400	16,800	14.5	12.2	775	8711417
	CA*F3636*6D*	G*EC960603BNA*	23,400	16,800	14.5	12.2	775	8711431
	CA*F3636*6D*	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711427
	CA*F3636*6D*	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711441
	CA*F3636*6D*	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711415
	CA*F3636*6D*	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711418
	CA*F3636*6D*	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8711428
	CA*F3636*6D*	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711434
	CA*F3636*6D*	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711440
	CA*F3636*6D*	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711435
	CA*F3636*6D*	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711429
	CA*F3636*6D*	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711424
	CA*F3636*6D*+EEP		23,600	16,900	14.0	12.2	725	8711442
	CA*F3636*6D*+EEP+TXV		23,600	16,900	14.0	12.2	725	8711443
	CA*F3636*6D*+MBVC1200**-1A*		23,600	16,900	15.0	12.5	775	8711444
	CA*F3636*6D*+TXV	G*EC960303ANA*	23,400	16,800	15.0	12.5	800	10516013
	CA*F3636*6D*+TXV	G*EC960403ANA*	23,400	16,800	15.0	12.5	800	10516018
	CA*F3636*6D*+TXV	G*EC960603ANA*	23,400	16,800	15.0	12.5	750	10516009
	CA*F3636*6D*+TXV	G*EC960403BNA*	23,600	16,900	15.0	12.5	800	10338210
	CA*F3636*6D*+TXV	G*VC80603B*B*	23,600	17,400	15.0	12.5	750	9923313
	CA*F3636*6D*+TXV	G*VC80803B*B*	23,600	17,400	15.0	12.5	750	9923318
	CA*F3636*6D*+TXV	G*VC80804C*B*	23,600	17,400	15.0	12.5	800	9923323
	CA*F3636*6D*+TXV	G*VC80805D*B*	23,600	17,400	15.0	12.5	800	9923328
	CA*F3636*6D*+TXV	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711455
	CA*F3636*6D*+TXV	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711457
	CA*F3636*6D*+TXV	A*EC960603BNA*	23,400	16,800	15.0	12.5	775	8711447
	CA*F3636*6D*+TXV	A*EC960803BNA*	23,400	16,800	15.0	12.5	750	8711448
	CA*F3636*6D*+TXV	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8711458

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0251L* (Contd.)	CA*F3636*6D*+TXV	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711463
	CA*F3636*6D*+TXV	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711464
	CA*F3636*6D*+TXV	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711467
	CA*F3636*6D*+TXV	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711454
	CA*F3636*6D*+TXV	A*EC960402BNA*	23,400	16,800	15.0	12.5	775	8711446
	CA*F3636*6D*+TXV	A*EC960302BNA*	23,400	16,800	15.0	12.5	750	8711445
	CA*F3636*6D*+TXV	G*EC960803BNA*	23,400	16,800	15.0	12.5	750	8711462
	CA*F3636*6D*+TXV	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711468
	CA*F3636*6D*+TXV	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711449
	CA*F3636*6D*+TXV	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711465
	CA*F3636*6D*+TXV	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711452
	CA*F3636*6D*+TXV	G*EC960302BNA*	23,400	16,800	15.0	12.5	750	8711459
	CA*F3636*6D*+TXV	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711471
	CA*F3636*6D*+TXV	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711450
	CA*F3636*6D*+TXV	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711456
	CA*F3636*6D*+TXV	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711469
	CA*F3636*6D*+TXV	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711470
	CA*F3636*6D*+TXV	G*EC960603BNA*	23,400	16,800	15.0	12.5	775	8711461
	CA*F3636*6D*+TXV	G*EC960402BNA*	23,400	16,800	15.0	12.5	775	8711460
	CA*F3636*6D*+TXV	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711451
	CA*F3636*6D*+TXV	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711453
	CA*F3636*6D*+TXV	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711466
	CA*F3743*6D*+EEP		23,800	17,100	14.0	12.2	725	8711472
	CA*F3743*6D*+EEP+TXV		23,800	17,100	14.5	12.2	725	8711473
	CAPT3743*4A*	G*EC960403BNA*	24,200	17,400	15.0	12.5	800	10338211
	CAPT3743*4A*	G*VC80603B*B*	23,600	17,400	15.0	12.5	750	9923314
	CAPT3743*4A*	G*VC80803B*B*	23,600	17,400	15.0	12.5	750	9923319
	CAPT3743*4A*	G*VC80804C*B*	23,600	17,400	15.0	12.5	800	9923324
	CAPT3743*4A*	G*VC80805D*B*	23,600	17,400	15.0	12.5	800	9923329
	CAPT3743*4A*	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711492
	CAPT3743*4A*	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8711487
	CAPT3743*4A*	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711483
	CAPT3743*4A*	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711486
	CAPT3743*4A*	A*VC960403BNA*	23,400	16,800	15.0	12.5	805	8711480
	CAPT3743*4A*	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711477
	CAPT3743*4A*	G*VC960803BNA*	23,400	16,800	15.0	12.5	800	8711496
	CAPT3743*4A*	A*VM970803BNA*	23,400	16,800	15.0	12.5	800	8711485
	CAPT3743*4A*	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711488
	CAPT3743*4A*	A*VM970603BNA*	23,400	16,800	15.0	12.5	820	8711484
	CAPT3743*4A*	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711479
	CAPT3743*4A*	G*VC960403BNA*	23,400	16,800	15.0	12.5	805	8711494
	CAPT3743*4A*	G*VM970603BNA*	23,400	16,800	15.0	12.5	820	8711498
	CAPT3743*4A*	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711497
	CAPT3743*4A*	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711500
	CAPT3743*4A*	G*VC960603BNA*	23,400	16,800	15.0	12.5	820	8711495
	CAPT3743*4A*	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711474
	CAPT3743*4A*	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711478
	CAPT3743*4A*	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711476
	CAPT3743*4A*	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711493
	CAPT3743*4A*	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711475
	CAPT3743*4A*	A*VC960603BNA*	23,400	16,800	15.0	12.5	820	8711481
	CAPT3743*4A*	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711491
	CAPT3743*4A*	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711489
	CAPT3743*4A*	G*VM970803BNA*	23,400	16,800	15.0	12.5	800	8711499
	CAPT3743*4A*	A*VC960803BNA*	23,400	16,800	15.0	12.5	800	8711482
	CAPT3743*4A*	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711490
	CAPT3743*4A*+EEP		23,600	16,900	14.0	12.2	725	8711501
	CAPT3743*4A*+MBVC1200**-1A*		23,600	16,900	14.5	12.2	775	8711502

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0251L* (Contd.)	CHPF3636B6C*	G*EC960303ANA*	23,400	16,800	14.5	12.2	750	10516014
	CHPF3636B6C*	G*EC960403ANA*	23,400	16,800	14.5	12.2	750	10516019
	CHPF3636B6C*	G*EC960603ANA*	23,400	16,800	14.5	12.2	700	10516010
	CHPF3636B6C*	G*EC960403BNA*	23,800	17,100	14.5	12.2	725	10338212
	CHPF3636B6C*	G*VC80603B*B*	23,600	17,400	15.0	12.5	750	9923315
	CHPF3636B6C*	G*VC80803B*B*	23,600	17,400	15.0	12.5	750	9923320
	CHPF3636B6C*	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711507
	CHPF3636B6C*	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711504
	CHPF3636B6C*	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711512
	CHPF3636B6C*	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711522
	CHPF3636B6C*	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711523
	CHPF3636B6C*	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711510
	CHPF3636B6C*	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711514
	CHPF3636B6C*	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711520
	CHPF3636B6C*	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711511
	CHPF3636B6C*	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711517
	CHPF3636B6C*	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711508
	CHPF3636B6C*	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711519
	CHPF3636B6C*	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711503
	CHPF3636B6C*	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8711513
	CHPF3636B6C*	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711521
	CHPF3636B6C*	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711515
	CHPF3636B6C*	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711505
	CHPF3636B6C*	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711516
	CHPF3636B6C*	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711509
	CHPF3636B6C*	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711506
	CHPF3636B6C*	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711518
	CHPF3636B6C*+EEP		23,600	16,900	14.0	12.2	725	8711524
	CHPF3636B6C*+EEP+TXV		23,600	16,900	14.5	12.2	725	8711525
	CHPF3636B6C*+MBVC1200**-1A*		23,600	16,900	15.0	12.5	775	8711526
	CHPF3636B6C*+TXV	G*EC960303ANA*	23,400	16,800	14.5	12.2	750	10516015
	CHPF3636B6C*+TXV	G*EC960403ANA*	23,400	16,800	14.5	12.2	750	10516020
	CHPF3636B6C*+TXV	G*EC960603ANA*	23,400	16,800	14.5	12.2	700	10516011
	CHPF3636B6C*+TXV	G*EC960403BNA*	23,800	17,100	14.5	12.2	725	10338213
	CHPF3636B6C*+TXV	G*VC80603B*B*	23,600	17,400	15.0	12.5	750	9923316
	CHPF3636B6C*+TXV	G*VC80803B*B*	23,600	17,400	15.0	12.5	750	9923321
	CHPF3636B6C*+TXV	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711527
	CHPF3636B6C*+TXV	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711542
	CHPF3636B6C*+TXV	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711536
	CHPF3636B6C*+TXV	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711535
	CHPF3636B6C*+TXV	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711528
	CHPF3636B6C*+TXV	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711545
	CHPF3636B6C*+TXV	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711543
	CHPF3636B6C*+TXV	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711529
	CHPF3636B6C*+TXV	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711546
	CHPF3636B6C*+TXV	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711547
	CHPF3636B6C*+TXV	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711544
	CHPF3636B6C*+TXV	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711540
	CHPF3636B6C*+TXV	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711532
	CHPF3636B6C*+TXV	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711538
	CHPF3636B6C*+TXV	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711534
	CHPF3636B6C*+TXV	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711539
	CHPF3636B6C*+TXV	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8711537
	CHPF3636B6C*+TXV	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711533
	CHPF3636B6C*+TXV	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711531
	CHPF3636B6C*+TXV	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711541
	CHPF3636B6C*+TXV	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711530
	CHPF3642C6C*	G*VC80805D*B*	23,600	17,400	15.0	12.5	800	9923330
	CHPF3642C6C*	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711551

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0251L* (Contd.)	CHPF3642C6C*	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711549
	CHPF3642C6C*	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711552
	CHPF3642C6C*	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711550
	CHPF3642C6C*	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711548
	CHPF3642C6C*	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711553
	CHPF3642C6C*+TXV	G*VC80805D*B*	23,600	17,400	15.0	12.5	800	9923331
	CHPF3642C6C*+TXV	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711557
	CHPF3642C6C*+TXV	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711554
	CHPF3642C6C*+TXV	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711559
	CHPF3642C6C*+TXV	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711556
	CHPF3642C6C*+TXV	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711558
	CHPF3642C6C*+TXV	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711555
	CSCF3036N6D*	G*VC80804C*B*	23,600	17,400	15.0	12.5	800	9923325
	CSCF3036N6D*	G*VC80805D*B*	23,600	17,400	15.0	12.5	800	9923332
	CSCF3036N6D*	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711571
	CSCF3036N6D*	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711573
	CSCF3036N6D*	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711577
	CSCF3036N6D*	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711564
	CSCF3036N6D*	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711568
	CSCF3036N6D*	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711566
	CSCF3036N6D*	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711562
	CSCF3036N6D*	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711575
	CSCF3036N6D*	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711565
	CSCF3036N6D*	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711570
	CSCF3036N6D*	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711572
	CSCF3036N6D*	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711576
	CSCF3036N6D*	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711560
	CSCF3036N6D*	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711567
	CSCF3036N6D*	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711569
	CSCF3036N6D*	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711561
	CSCF3036N6D*	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711563
	CSCF3036N6D*	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711574
	CSCF3036N6D*+EEP		23,200	16,700	14.0	12.2	800	8711578
	CSCF3036N6D*+EEP+TXV		23,200	16,700	14.0	12.2	800	8711579
	CSCF3036N6D*+TXV	G*EC960303ANA*	23,000	16,500	14.0	12.2	800	10516016
	CSCF3036N6D*+TXV	G*EC960403ANA*	23,000	16,500	14.0	12.2	800	10516021
	CSCF3036N6D*+TXV	G*VC80804C*B*	23,600	17,400	15.0	12.5	800	9923326
	CSCF3036N6D*+TXV	G*VC80805D*B*	23,600	17,400	15.0	12.5	800	9923333
	CSCF3036N6D*+TXV	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711590
	CSCF3036N6D*+TXV	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711585
	CSCF3036N6D*+TXV	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711597
	CSCF3036N6D*+TXV	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711596
	CSCF3036N6D*+TXV	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8711594
	CSCF3036N6D*+TXV	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8711587
	CSCF3036N6D*+TXV	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711591
	CSCF3036N6D*+TXV	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711584
	CSCF3036N6D*+TXV	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711592
	CSCF3036N6D*+TXV	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711589
	CSCF3036N6D*+TXV	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711586
	CSCF3036N6D*+TXV	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8711583
	CSCF3036N6D*+TXV	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8711581
	CSCF3036N6D*+TXV	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8711593
	CSCF3036N6D*+TXV	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8711595
	CSCF3036N6D*+TXV	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8711580
	CSCF3036N6D*+TXV	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8711588
	CSCF3036N6D*+TXV	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8711582
	CSCF3642N6D*	G*EC960403BNA*	24,000	17,200	14.5	12.2	800	10338214
	CSCF3642N6D*	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711598
	CSCF3642N6D*	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711601

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0251L* (Contd.)	CSCF3642N6D*	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711599
	CSCF3642N6D*	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711605
	CSCF3642N6D*	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711600
	CSCF3642N6D*	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711602
	CSCF3642N6D*	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711603
	CSCF3642N6D*	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711604
	CSCF3642N6D*+TXV	G*EC960403BNA*	24,000	17,200	15.0	12.5	800	10338215
	CSCF3642N6D*+TXV	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711613
	CSCF3642N6D*+TXV	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711608
	CSCF3642N6D*+TXV	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711606
	CSCF3642N6D*+TXV	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711607
	CSCF3642N6D*+TXV	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8711610
	CSCF3642N6D*+TXV	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8711609
	CSCF3642N6D*+TXV	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8711611
	CSCF3642N6D*+TXV	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8711612
GSX14 0301K*	ARUF31B14A*		28,200	21,000	14.0	11.5	870	7984193
	ASPT36C14A*		29,000	21,600	14.5	12.0	1,010	7516241
	ASPT37B14A*		29,000	21,600	14.5	12.0	945	8242058
	ASPT37C14A*		29,000	21,600	15.0	12.5	1,045	8242059
	ASPT39C14A*		29,000	21,600	14.5	12.0	955	10206638
	AVPTC36C14A*		29,000	21,600	14.5	12.0	1,085	7516242
	AVPTC37B14A*		29,000	21,600	14.5	12.0	925	8996136
	AVPTC37C14A*		29,200	21,800	15.0	12.5	930	8996137
	AVPTC39C14A*		29,000	21,600	14.5	12.0	1,050	10206661
	AWUF31XX16A*		28,000	20,800	14.0	11.5	950	7516243
	AWUF31XX16A*+TXV		28,400	21,200	14.5	11.5	1,000	7516244
	AWUF32XX16A*		28,000	20,800	14.0	11.5	950	7516245
	AWUF32XX16A*+TXV		28,400	21,200	14.5	11.5	1,000	7516246
	AWUF37XX16B*		28,400	21,200	14.0	11.5	1,000	7516247
	AWUF37XX16B*+TXV		28,600	21,200	14.5	11.5	1,000	7516248
	CA*F3137*6A*+EEP		28,800	21,400	14.0	11.5	1,000	8187465
	CA*F3137*6A*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	8187466
	CA*F3137*6A*+MBVC1200**-1A*		28,800	21,400	14.5	11.5	950	8187467
	CA*F3137*6A*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	950	8187468
	CA*F3642*6D*+EEP		28,800	21,400	14.0	11.5	1,000	7516249
	CA*F3642*6D*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7516250
	CA*F3642*6D*+MBVC1200**-1A*		28,800	21,400	14.5	11.5	980	7519535
	CA*F3642*6D*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	980	7516251
	CA*F3642*6D*+MBVC1600**-1A*		28,800	21,400	14.5	11.5	1,000	7516252
	CA*F3642*6D*+MBVC1600**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7516253
	CA*F3743*6D*+EEP		28,800	21,400	14.0	11.5	1,000	7516289
	CA*F3743*6D*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7516290
	CAPT3743*4A*+EEP		28,800	21,400	14.5	11.5	1,000	7516326
	CAPT3743*4A*+MBVC1200**-1A*		28,800	21,400	14.5	12.0	980	7516327
	CAPT3743*4A*+MBVC1600**-1A*		28,800	21,400	14.5	12.0	1,000	7516328
	CHPF3642C6C*+EEP		28,800	21,400	14.0	11.5	1,000	7516368
	CHPF3642C6C*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7516369
	CHPF3642C6C*+MBVC1200**-1A*		28,800	21,400	14.5	12.0	1,000	7519536
	CHPF3642C6C*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7516370
	CHPF3642C6C*+MBVC1600**-1A*		28,800	21,400	14.5	12.0	1,000	7516371
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7516372
	CHPF3743C6B*+EEP		28,800	21,400	14.0	11.5	1,000	7516400
	CHPF3743C6B*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7516401
	CHPF3743D6B*+EEP		28,800	21,400	14.0	11.5	1,000	7516402
	CHPF3743D6B*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7516403
	CSCF3642N6D*+EEP		28,600	21,200	14.0	11.5	1,000	7516404
	CSCF3642N6D*+EEP+TXV		28,600	21,200	14.0	11.5	1,000	7516405
	CA*F3137*6A*+TXV	G*E80603B*B*	28,800	21,400	14.5	11.5	1,000	8187469
	CA*F3642*6D*+TXV	G*E80603B*B*	28,800	21,400	14.5	11.5	1,050	7516268

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0301K* (Contd.)	CA*F3743*6D*+TXV	G*E80603B*B*	28,800	21,400	14.5	12.0	1,050	7516305
	CAPT3743*4A*	G*E80603B*B*	28,800	21,400	14.5	11.5	1,050	7516343
	CHPF3642C6C*+TXV	G*E80603B*B*	28,800	21,400	14.5	11.5	1,050	7516383
	CSCF3642N6D*+TXV	G*E80603B*B*	28,800	21,400	14.5	11.5	1,050	7516420
	CA*F3642*6D*+TXV	G*E80805C*B*	28,800	21,400	14.5	11.5	1,060	7516269
	CA*F3743*6D*+TXV	G*E80805C*B*	28,800	21,400	14.5	12.0	1,060	7516306
	CAPT3743*4A*	G*E80805C*B*	28,800	21,400	14.5	11.5	1,060	7516344
	CHPF3642C6C*+TXV	G*E80805C*B*	28,800	21,400	14.5	11.5	1,000	7516384
	CSCF3642N6D*+TXV	G*E80805C*B*	28,800	21,400	14.5	11.5	1,060	7516421
	CA*F3642*6D*+TXV	G*E81005C*B*	28,800	21,400	14.5	11.5	1,080	7516270
	CA*F3743*6D*+TXV	G*E81005C*B*	28,800	21,400	14.5	11.5	1,080	7516307
	CAPT3743*4A*	G*E81005C*B*	28,800	21,400	14.5	11.5	1,080	7516345
	CHPF3642C6C*+TXV	G*E81005C*B*	28,800	21,400	14.5	11.5	1,080	7516385
	CSCF3642N6D*+TXV	G*E81005C*B*	28,600	21,200	14.5	11.5	1,070	7520286
	CA*F3137*6A*+TXV	G*EC960302BNA*	28,200	21,000	14.5	11.5	940	8187475
	CA*F3642*6D*+TXV	G*EC960302BNA*	28,200	21,000	14.5	11.5	940	7516271
	CA*F3743*6D*+TXV	G*EC960302BNA*	28,400	21,200	14.5	11.5	940	7516308
	CAPT3743*4A*	G*EC960302BNA*	28,200	21,000	14.5	11.5	940	7516346
	CHPF3642C6C*+TXV	G*EC960302BNA*	28,400	21,200	14.5	11.5	940	7516386
	CSCF3642N6D*+TXV	G*EC960302BNA*	28,200	21,000	14.5	11.5	940	7516422
	CA*F3137*6A*+TXV	G*EC960402BNA*	28,200	21,000	14.5	11.5	925	8187476
	CA*F3642*6D*+TXV	G*EC960402BNA*	28,200	21,000	14.5	11.5	925	7516272
	CA*F3743*6D*+TXV	G*EC960402BNA*	28,400	21,200	14.5	11.5	925	7516309
	CAPT3743*4A*	G*EC960402BNA*	28,200	21,000	14.5	11.5	925	7516347
	CHPF3642C6C*+TXV	G*EC960402BNA*	28,400	21,200	14.5	11.5	925	7516387
	CSCF3642N6D*+TXV	G*EC960402BNA*	28,200	21,000	14.5	11.5	925	7516423
	CA*F3137*6A*+TXV	G*EC960603ANA*	28,200	21,000	14.5	11.5	950	10516022
	CA*F3137*6A*+TXV	G*EC960603BNA*	28,200	21,000	14.5	11.5	965	8187477
	CA*F3642*6D*+TXV	G*EC960603BNA*	28,200	21,000	14.5	11.5	965	7516273
	CA*F3743*6D*+TXV	G*EC960603BNA*	28,400	21,200	14.5	11.5	965	7516310
	CAPT3743*4A*	G*EC960603BNA*	28,200	21,000	14.5	11.5	965	7516348
	CHPF3642C6C*+TXV	G*EC960603BNA*	28,400	21,200	14.5	11.5	965	7516388
	CSCF3642N6D*+TXV	G*EC960603BNA*	28,200	21,000	14.5	11.5	965	7516424
	CA*F3137*6A*+TXV	G*EC960803BNA*	28,200	21,000	14.5	11.5	950	8187478
	CA*F3642*6D*+TXV	G*EC960803BNA*	28,200	21,000	14.5	11.5	950	7516274
	CA*F3743*6D*+TXV	G*EC960803BNA*	28,400	21,200	14.5	11.5	950	7516311
	CAPT3743*4A*	G*EC960803BNA*	28,200	21,000	14.5	11.5	950	7516349
	CHPF3642C6C*+TXV	G*EC960803BNA*	28,400	21,200	14.5	11.5	950	7516389
	CSCF3642N6D*+TXV	G*EC960803BNA*	28,400	21,200	14.5	11.5	950	7516425
	CA*F3642*6D*+TXV	G*EC961004CNA*	28,600	21,200	14.5	11.5	1,025	7516275
	CA*F3743*6D*+TXV	G*EC961004CNA*	28,800	21,400	14.5	11.5	1,025	7516312
	CAPT3743*4A*	G*EC961004CNA*	28,600	21,200	14.5	11.5	1,025	7516350
	CHPF3642C6C*+TXV	G*EC961004CNA*	28,800	21,400	14.5	11.5	1,025	7516390
	CSCF3642N6D*+TXV	G*EC961004CNA*	28,400	21,200	14.5	11.5	1,025	7516426
	CA*F3137*6A*+TXV	G*VC80603B*B*	28,800	21,400	14.5	11.5	900	9923334
	CA*F3642*6D*+TXV	G*VC80603B*B*	28,800	21,400	14.5	11.5	900	9923335
	CA*F3743*6D*+TXV	G*VC80603B*B*	28,800	21,400	14.5	12.0	900	9923336
	CAPT3743*4A*	G*VC80603B*B*	28,800	21,400	14.5	11.5	900	9923337
	CHPF3636B6C*+TXV	G*VC80603B*B*	28,600	21,200	14.5	11.5	900	9923338
	CSCF3642N6D*+TXV	G*VC80603B*B*	28,800	21,400	14.5	11.5	900	9923339
	CA*F3137*6A*+TXV	G*VC80604B*B*	28,400	21,200	14.5	11.5	1,000	8187470
	CA*F3642*6D*+TXV	G*VC80604B*B*	28,400	21,200	14.5	11.5	1,000	7516276
	CA*F3743*6D*+TXV	G*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7516313
	CAPT3743*4A*	G*VC80604B*B*	28,400	21,200	14.5	11.5	1,000	7516351
	CHPF3642C6C*+TXV	G*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7516391
	CSCF3642N6D*+TXV	G*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7516427
	CA*F3137*6A*+TXV	G*VC80803B*B*	28,800	21,400	14.5	11.5	950	9923340
	CA*F3642*6D*+TXV	G*VC80803B*B*	28,800	21,400	14.5	11.5	950	9923341
	CA*F3743*6D*+TXV	G*VC80803B*B*	28,800	21,400	14.5	12.0	950	9923342

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0301K* (Contd.)	CAPT3743*4A*	G*VC80803B*B*	28,800	21,400	14.5	11.5	950	9923343
	CHPF3636B6C*+TXV	G*VC80803B*B*	28,600	21,200	14.5	11.5	950	9923344
	CSCF3642N6D*+TXV	G*VC80803B*B*	28,800	21,400	14.5	11.5	950	9923345
	CA*F3642*6D*+TXV	G*VC80804C*B*	28,400	21,200	14.5	11.5	1,050	9923346
	CA*F3743*6D*+TXV	G*VC80804C*B*	28,600	21,200	14.5	11.5	1,050	9923347
	CAPT3743*4A*	G*VC80804C*B*	28,400	21,200	14.5	11.5	1,050	9923348
	CHPF3642C6C*+TXV	G*VC80804C*B*	28,600	21,200	14.5	11.5	1,000	9923349
	CSCF3642N6D*+TXV	G*VC80804C*B*	28,600	21,200	14.5	11.5	1,050	9923350
	CA*F3642*6D*+TXV	G*VC80805C*B*	28,400	21,200	14.5	11.5	990	7516277
	CA*F3743*6D*+TXV	G*VC80805C*B*	28,600	21,200	14.5	11.5	990	7516314
	CAPT3743*4A*	G*VC80805C*B*	28,400	21,200	14.5	11.5	990	7516352
	CHPF3642C6C*+TXV	G*VC80805C*B*	28,600	21,200	14.5	11.5	990	7516392
	CSCF3642N6D*+TXV	G*VC80805C*B*	28,600	21,200	14.5	11.5	990	7516428
	CA*F3642*6D*+TXV	G*VC80805D*B*	28,400	21,200	14.5	11.5	1,000	9923351
	CA*F3743*6D*+TXV	G*VC80805D*B*	28,600	21,200	14.5	11.5	1,000	9923352
	CAPT3743*4A*	G*VC80805D*B*	28,400	21,200	14.5	11.5	1,000	9923353
	CHPF3642C6C*+TXV	G*VC80805D*B*	28,600	21,200	14.5	11.5	1,000	9923354
	CSCF3642N6D*+TXV	G*VC80805D*B*	28,600	21,200	14.5	11.5	1,000	9923355
	CA*F3642*6D*+TXV	G*VC81005C*B*	28,400	21,200	14.5	11.5	1,000	7516278
	CA*F3743*6D*+TXV	G*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7516315
	CAPT3743*4A*	G*VC81005C*B*	28,400	21,200	14.5	11.5	1,000	7516353
	CHPF3642C6C*+TXV	G*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7516393
	CSCF3642N6D*+TXV	G*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7516429
	CA*F3137*6A*+TXV	G*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	8187471
	CA*F3642*6D*+TXV	G*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	7516279
	CA*F3743*6D*+TXV	G*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7516316
	CAPT3743*4A*	G*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	7516354
	CHPF3636B6C*+TXV	G*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7516364
	CSCF3642N6D*+TXV	G*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7516430
	CA*F3137*6A*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,000	8187472
	CA*F3642*6D*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7516280
	CA*F3743*6D*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7516317
	CAPT3743*4A*	G*VC960603BNA*	28,600	21,200	14.5	11.5	1,040	7516355
	CHPF3636B6C*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7516365
	CSCF3642N6D*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7516431
	CA*F3137*6A*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	950	8187473
	CA*F3642*6D*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	975	7516281
	CA*F3743*6D*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	975	7516318
	CAPT3743*4A*	G*VC960803BNA*	28,400	21,200	14.5	11.5	975	7516356
	CHPF3636B6C*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	975	7516366
	CSCF3642N6D*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	975	7516432
	CA*F3642*6D*	G*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7516287
	CA*F3642*6D*+TXV	G*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7516282
	CA*F3743*6D*	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7516324
	CA*F3743*6D*+TXV	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7516319
	CAPT3743*4A*	G*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7516357
	CHPF3642C6C*	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7516398
	CHPF3642C6C*+TXV	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7516394
	CSCF3642N6D*	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7516438
	CSCF3642N6D*+TXV	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7516433
	CA*F3137*6A*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,000	8187474
	CA*F3642*6D*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7516283
	CA*F3743*6D*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7516320
	CAPT3743*4A*	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7516358
	CHPF3636B6C*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7516367
	CSCF3642N6D*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7516434
	CA*F3642*6D*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516288
	CA*F3642*6D*+TXV	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516284
	CA*F3743*6D*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516325

See Notes on Page 71.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0301K* (Contd.)	CA*F3743*6D*+TXV	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516321
	CAPT3743*4A*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516359
	CHPF3642C6C*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516399
	CHPF3642C6C*+TXV	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516395
	CSCF3642N6D*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516439
	CSCF3642N6D*+TXV	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7516435
GSX14 0311K*	CAPT3743*4A*		28,200	22,200	14.0	12.2	870	7984194
	CHPF3636B6C*+TXV		28,400	22,400	14.0	12.2	1,050	7984195
	CSCF3642N6D*+TXV		27,400	21563.8	14.0	12.2	950	10341504
	CA*F3137*6A*+TXV		28,000	22,000	15.0	12.5	1,010	7516440
	CA*F3642*6D*+TXV		29,000	22,800	14.5	12.2	945	8242060
	CA*F3743*6D*+TXV		29,000	22,800	15.0	12.5	1,045	8242061
	CAPT3743*4A*		28,000	22,000	15.0	12.5	1,000	10206639
	CHPF3642C6C*+TXV		27,400	21563.8	14.0	12.2	950	10341507
	CSCF3642N6D*+TXV		28,000	22,000	15.0	12.5	1,000	7516441
	CA*F3137*6A*+TXV		28000	22,000	14.5	12.2	925	8996138
	CA*F3642*6D*+TXV		28,200	22,200	15.0	12.5	930	8996139
	CA*F3743*6D*+TXV		28,000	22,000	15.0	12.5	965	10206662
	CAPT3743*4A*		28,000	22,000	14.0	12.2	1,000	7516442
	CHPF3636B6C*+TXV		28,000	22,000	14.5	12.2	1,000	7516443
	CSCF3642N6D*+TXV		28,000	22,000	14.0	12.2	950	7516444
	CA*F3642*6D*+TXV		28,000	22,000	14.5	12.2	950	7516445
	CA*F3743*6D*+TXV		28,000	22,000	14.0	12.2	950	7516446
	CAPT3743*4A*		28,000	22,000	14.5	12.2	950	7516447
	CHPF3642C6C*+TXV	G*EC960303ANA*	28,200	22,200	14.5	12.5	975	10516027
	CSCF3642N6D*+TXV	G*EC960403ANA*	28,200	22,200	15.0	12.5	975	10516028
	CA*F3642*6D*+TXV	G*EC960603ANA*	28,200	22,200	14.5	12.5	950	10516026
	CA*F3743*6D*+TXV	G*EC960403BNA*	28,000	22,000	15.0	12.5	1,000	10338222
	CAPT3743*4A*	G*VC80603B*B*	28,400	23,000	14.5	12.2	1,000	9923361
	CHPF3642C6C*+TXV	G*VC80803B*B*	28,400	23,000	14.5	12.2	1,050	9923366
	CSCF3642N6D*+TXV	A*VC960403BNA*	28,600	22,600	15.0	12.5	1,000	7520295
	CA*F3642*6D*+TXV	A*EC960803BNA*	28,200	22,200	15.0	12.5	950	7520290
	CA*F3743*6D*+TXV	A*VC80604B*B*	28,400	22,400	15.0	12.5	1,000	7520292
	CAPT3743*4A*	A*VC960803BNA*	28,400	22,400	15.0	12.5	975	7520297
	CHPF3642C6C*+TXV	A*VC960603BNA*	28,600	22,600	15.0	12.5	1,040	7520296
	CSCF3642N6D*+TXV	G*EC960402BNA*	28,200	22,200	15.0	12.5	925	7520303
	CA*F3642*6D*+TXV	G*EC960803BNA*	28,200	22,200	15.0	12.5	950	7520305
	CA*F3743*6D*+TXV	A*EC960402BNA*	28,200	22,200	15.0	12.5	925	7520288
	CAPT3743*4A*	A*EC960603BNA*	28,200	22,200	15.0	12.5	965	7520289
	CHPF3642C6C*+TXV	G*VC80604B*B*	28,400	22,400	15.0	12.5	1,000	7520307
	CSCF3642N6D*+TXV	G*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7520313
	CA*F3137*6A*+TXV	G*EC960603BNA*	28,200	22,200	15.0	12.5	965	7520304
	CA*F3642*6D*+TXV	G*E80603B*B*	28,400	22,400	14.5	12.2	1,050	7520299
	CA*F3743*6D*+TXV	A*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7520298
	CAPT3743*4A*	G*VC960803BNA*	28,400	22,400	15.0	12.5	975	7520312
	CHPF3636B6C*+TXV	G*VC960603BNA*	28,600	22,600	15.0	12.5	1,040	7520311
	CSCF3642N6D*+TXV	G*VC960403BNA*	28,600	22,600	15.0	12.5	1,000	7520310
	CA*F3137*6A*+TXV	A*EC960302BNA*	28,200	22,200	15.0	12.5	940	7520287
	CA*F3642*6D*+TXV	G*EC960302BNA*	28,200	22,200	15.0	12.5	940	7520302
	CA*F3743*6D*+TXV		28,600	22,600	14.0	12.2	1,000	7516452
	CAPT3743*4A*		28,600	22,600	14.0	12.2	1,000	7516453
	CHPF3636B6C*+TXV	A*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7516492
	CSCF3642N6D*+TXV	G*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7516494
	CA*F3137*6A*+TXV	G*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7516493
	CA*F3642*6D*+TXV	A*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7516491
	CA*F3743*6D*+TXV	G*EC960403BNA*	28,000	22,000	15.0	12.5	1,000	10338223
	CAPT3743*4A*	G*VC80603B*B*	28,400	23,000	15.0	12.5	1,000	9923362
	CHPF3636B6C*+TXV	G*VC80803B*B*	28,400	23,000	15.0	12.5	1,050	9923367
	CSCF3642N6D*+TXV	G*VC80804C*B*	28,600	23,200	15.0	12.5	1,050	9923371

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0311K* (Contd.)	CA*F3642*6D*	G*VC80805D*B*	28,600	23,200	15.0	12.5	1,000	9923375
	CA*F3642*6D*+TXV	G*E80603B*B*	28,400	22,400	15.0	12.5	1,050	7516474
	CA*F3743*6D*	G*EC960803BNA*	28,400	22,400	15.0	12.5	950	7516480
	CA*F3743*6D*+TXV	G*VC80805C*B*	28,600	22,600	15.0	12.5	990	7516483
	CAPT3743*4A*	A*VC80604B*B*	28,600	22,600	15.0	12.5	1,000	7516465
	CHPF3642C6C*	G*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7516488
	CHPF3642C6C*+TXV	G*VC960803BNA*	28,400	22,400	15.0	12.5	975	7516487
	CSCF3642N6D*	G*VC960403BNA*	28,800	22,600	15.0	12.5	1,000	7516485
	CSCF3642N6D*+TXV	G*VC80604B*B*	28,600	22,600	15.0	12.5	1,000	7516482
	CA*F3137*6A*+TXV	G*E81005C*B*	28,400	22,400	15.0	12.5	1,000	7516476
	CA*F3642*6D*+TXV	G*EC960603BNA*	28,400	22,400	15.0	12.5	965	7516479
	CA*F3743*6D*+TXV	A*EC960603BNA*	28,400	22,400	15.0	12.5	965	7516462
	CAPT3743*4A*	A*VC960403BNA*	28,800	22,600	15.0	12.5	1,000	7516468
	CHPF3636B6C*+TXV	G*EC960402BNA*	28,400	22,400	15.0	12.5	925	7516478
	CSCF3642N6D*+TXV	G*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7516490
	CA*F3642*6D*	A*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7516472
	CA*F3642*6D*+TXV	G*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7516489
	CA*F3743*6D*	G*E80805C*B*	28,600	22,600	15.0	12.5	1,000	7516475
	CA*F3743*6D*+TXV	G*EC960302BNA*	28,400	22,400	15.0	12.5	940	7516477
	CAPT3743*4A*	G*VC81005C*B*	28,600	22,600	15.0	12.5	1,000	7516484
	CHPF3642C6C*	A*EC960302BNA*	28,400	22,400	15.0	12.5	940	7516460
	CHPF3642C6C*+TXV	G*VC960603BNA*	28,600	22,600	15.0	12.5	1,040	7516486
	CSCF3642N6D*	A*EC960803BNA*	28,400	22,400	15.0	12.5	950	7516463
	CSCF3642N6D*+TXV	A*VC960603BNA*	28,600	22,600	15.0	12.5	1,040	7516469
	CA*F3743*6D*+TXV	A*VC80805C*B*	28,600	22,600	15.0	12.5	990	7516466
	CA*F3743*6D*+TXV	A*EC961004CNA*	28,800	22,600	15.0	12.5	1,025	7516464
	CA*F3743*6D*+TXV	A*VC960803BNA*	28,400	22,400	15.0	12.5	975	7516470
	CA*F3743*6D*+TXV	A*EC960402BNA*	28,400	22,400	15.0	12.5	925	7516461
	CA*F3743*6D*+TXV	A*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7516473
	CA*F3743*6D*+TXV	A*VC81005C*B*	28,600	22,600	15.0	12.5	1,000	7516467
	CA*F3743*6D*+TXV	A*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7516471
	CA*F3743*6D*+TXV	G*EC961004CNA*	28,800	22,600	15.0	12.5	1,025	7516481
	CAPT3743*4A*	G*EC960403BNA*	28,000	22,000	14.5	12.2	1,000	10338224
	CAPT3743*4A*	G*VC80603B*B*	28,400	23,000	14.5	12.2	1,000	9923363
	CAPT3743*4A*	G*VC80803B*B*	28,400	23,000	14.5	12.2	1,050	9923368
	CAPT3743*4A*	G*VC80804C*B*	28,400	23,000	14.5	12.2	1,050	9923372
	CAPT3743*4A*	A*VC960804CNA*	28,400	22,400	14.5	12.2	1,000	7516509
	CAPT3743*4A*	A*VC960603BNA*	28,400	22,400	14.5	12.2	1,040	7516507
	CAPT3743*4A*	G*EC961004CNA*	28,600	22,600	14.5	12.2	1,025	7516519
	CAPT3743*4A*	G*E80805C*B*	28,400	22,400	14.5	12.2	1,000	7516513
	CAPT3743*4A*	G*E80603B*B*	28,400	22,400	14.5	12.2	1,050	7516512
	CAPT3743*4A*	G*VC960603BNA*	28,400	22,400	14.5	12.2	1,040	7516524
	CAPT3743*4A*	A*VC960803BNA*	27,800	21,800	15.0	12.5	975	7516508
	CAPT3743*4A*	G*VC80604B*B*	28,400	22,400	14.5	12.2	1,000	7516520
	CAPT3743*4A*	G*EC960302BNA*	28,200	22,200	14.5	12.2	940	7516515
	CAPT3743*4A*	G*VM970804CNA*	28,400	22,400	14.5	12.2	1,000	7516528
	CAPT3743*4A*	A*VC81005C*B*	28,400	22,400	14.5	12.2	1,000	7516505
	CAPT3743*4A*	G*EC960402BNA*	28,200	22,200	14.5	12.2	925	7516516
	CAPT3743*4A*	A*EC960803BNA*	28,200	22,200	14.5	12.2	950	7516501
	CAPT3743*4A*	G*VC81005C*B*	28,400	22,400	14.5	12.2	1,000	7516522
	CAPT3743*4A*	A*EC960402BNA*	28,200	22,200	14.5	12.2	925	7516499
	CAPT3743*4A*	G*VC960403BNA*	28,400	22,400	14.5	12.2	1,000	7516523
	CAPT3743*4A*	A*VM970804CNA*	28,400	22,400	14.5	12.2	1,000	7516511
	CAPT3743*4A*	A*EC961004CNA*	28,600	22,600	14.5	12.2	1,025	7516502
	CAPT3743*4A*	G*VC960803BNA*	27,800	21,800	15.0	12.5	975	7516525
	CAPT3743*4A*	A*EC960302BNA*	28,200	22,200	14.5	12.2	940	7516498
	CAPT3743*4A*	A*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7516510
	CAPT3743*4A*	G*VC960804CNA*	28,400	22,400	14.5	12.2	1,000	7516526
	CAPT3743*4A*	G*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7516527

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0311K* (Contd.)	CAPT3743*4A*	A*VC960403BNA*	28,400	22,400	14.5	12.2	1,000	7516506
	CAPT3743*4A*	A*VC80604B*B*	28,400	22,400	14.5	12.2	1,000	7516503
	CAPT3743*4A*	G*EC960803BNA*	28,200	22,200	14.5	12.2	950	7516518
	CAPT3743*4A*+EEP		28,000	22,000	14.5	12.2	1,000	7516495
	CAPT3743*4A*+MBVC1200**-1A*		28,600	22,600	15.0	12.5	1,000	7516496
	CAPT3743*4A*+MBVC1600**-1A*		28,600	22,600	15.0	12.5	1,000	7516497
	CHPF3636B6C*+TXV	G*VC80603B*B*	28,400	23,000	14.5	12.2	1,000	9923364
	CHPF3636B6C*+TXV	G*VC80803B*B*	28,400	23,000	14.5	12.2	950	9923369
	CHPF3636B6C*+TXV	G*VM970603BNA*	28,000	22,000	14.5	12.2	1,040	7516536
	CHPF3636B6C*+TXV	G*VC960803BNA*	28,000	22,000	14.5	12.2	975	7516535
	CHPF3636B6C*+TXV	A*VC960603BNA*	28,000	22,000	14.5	12.2	1,040	7516530
	CHPF3636B6C*+TXV	A*VM970603BNA*	28,000	22,000	14.5	12.2	1,040	7516532
	CHPF3636B6C*+TXV	G*VC960403BNA*	28,000	22,000	14.5	12.5	1,000	7516533
	CHPF3636B6C*+TXV	A*VC960803BNA*	28,000	22,000	14.5	12.2	975	7516531
	CHPF3636B6C*+TXV	G*VC960603BNA*	28,000	22,000	14.5	12.2	1,040	7516534
	CHPF3636B6C*+TXV	A*VC960403BNA*	28,000	22,000	14.5	12.5	1,000	7516529
	CHPF3642C6C*+EEP		28,600	22,600	14.0	12.2	1,000	7516537
	CHPF3642C6C*+EEP+TXV		28,000	22,000	14.5	12.2	1,000	7516538
	CHPF3642C6C*+MBVC1200**-1A*		28,000	22,000	14.5	12.2	1,000	7519537
	CHPF3642C6C*+MBVC1200**-1A*+TXV		28,000	22,000	14.5	12.2	1,000	7516539
	CHPF3642C6C*+MBVC1600**-1A*		28,000	22,000	14.5	12.2	1,000	7516540
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,400	22,400	15.0	12.5	1,000	7516541
	CHPF3642C6C*+TXV	G*EC960403BNA*	28,000	22,000	14.5	12.2	975	10338225
	CHPF3642C6C*+TXV	G*VC80804C*B*	28,000	22,600	14.5	12.2	1,000	9923373
	CHPF3642C6C*+TXV	A*EC960803BNA*	28,400	22,400	14.5	12.2	950	7516545
	CHPF3642C6C*+TXV	A*EC960402BNA*	28,400	22,400	15.0	12.5	925	7516543
	CHPF3642C6C*+TXV	G*EC960803BNA*	28,400	22,400	14.5	12.2	950	7516551
	CHPF3642C6C*+TXV	G*E80603B*B*	28,000	22,000	14.5	12.2	1,050	7516547
	CHPF3642C6C*+TXV	G*VC80604B*B*	28,000	22,000	14.5	12.2	1,000	7516552
	CHPF3642C6C*+TXV	G*EC960402BNA*	28,400	22,400	15.0	12.5	925	7516549
	CHPF3642C6C*+TXV	A*VC80604B*B*	28,000	22,000	14.5	12.2	1,000	7516546
	CHPF3642C6C*+TXV	A*EC960302BNA*	28,400	22,400	14.5	12.2	940	7516542
	CHPF3642C6C*+TXV	A*EC960603BNA*	28,400	22,400	14.5	12.2	965	7516544
	CHPF3642C6C*+TXV	G*EC960603BNA*	28,400	22,400	14.5	12.2	965	7516550
	CHPF3642C6C*+TXV	G*EC960302BNA*	28,400	22,400	14.5	12.2	940	7516548
	CHPF3642D6C*	G*VM970804CNA*	28,600	22,600	14.5	12.2	1,000	7516568
	CHPF3642D6C*	A*VC960804CNA*	28,600	22,600	14.5	12.2	1,000	7516565
	CHPF3642D6C*	A*VM970804CNA*	28,600	22,600	14.5	12.2	1,000	7516566
	CHPF3642D6C*	G*VC960804CNA*	28,600	22,600	14.5	12.2	1,000	7516567
	CHPF3642D6C*+TXV	G*VC80805D*B*	28,400	23,000	15.0	12.5	1,000	9923376
	CHPF3642D6C*+TXV	A*VC960804CNA*	28,600	22,600	14.5	12.2	1,000	7516556
	CHPF3642D6C*+TXV	G*E80805C*B*	28,000	22,000	15.0	12.5	1,000	7516558
	CHPF3642D6C*+TXV	G*VC80805C*B*	28,600	22,600	15.0	12.5	990	7516561
	CHPF3642D6C*+TXV	G*VC960804CNA*	28,600	22,600	14.5	12.2	1,000	7516563
	CHPF3642D6C*+TXV	G*EC961004CNA*	28,800	22,600	15.0	12.5	1,025	7516560
	CHPF3642D6C*+TXV	G*E81005C*B*	28,600	22,600	15.0	12.5	1,000	7516559
	CHPF3642D6C*+TXV	A*VC81005C*B*	28,600	22,600	14.5	12.2	1,000	7516555
	CHPF3642D6C*+TXV	A*EC961004CNA*	28,800	22,600	15.0	12.5	1,025	7516553
	CHPF3642D6C*+TXV	A*VM970804CNA*	28,600	22,600	14.5	12.2	1,000	7516557
	CHPF3642D6C*+TXV	G*VM970804CNA*	28,600	22,600	14.5	12.2	1,000	7516564
	CHPF3642D6C*+TXV	A*VC80805C*B*	28,600	22,600	15.0	12.5	990	7516554
	CHPF3642D6C*+TXV	G*VC81005C*B*	28,600	22,600	14.5	12.2	1,000	7516562
	CSCF3642N6D*	G*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7516605
	CSCF3642N6D*	A*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7516603
	CSCF3642N6D*	G*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7516604
	CSCF3642N6D*	A*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7516602
	CSCF3642N6D*+EEP		28,400	22,400	14.0	12.2	1,000	7516569
	CSCF3642N6D*+EEP+TXV		28,400	22,400	14.5	12.2	1,000	7516570
	CSCF3642N6D*+TXV	G*EC960403ANA*	28,200	22,200	15.0	12.5	975	10516029

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0311K* (Contd.)	CSCF3642N6D*+TXV	G*EC960403BNA*	28,000	22,000	15.0	12.5	1,000	10338226
	CSCF3642N6D*+TXV	G*VC80603B*B*	28,600	23,200	15.0	12.5	1,000	9923365
	CSCF3642N6D*+TXV	G*VC80803B*B*	28,600	23,200	15.0	12.5	1,050	9923370
	CSCF3642N6D*+TXV	G*VC80804C*B*	28,600	23,200	15.0	12.5	1,050	9923374
	CSCF3642N6D*+TXV	G*VC80805D*B*	28,400	23,000	15.0	12.5	1,000	9923377
	CSCF3642N6D*+TXV	G*VC80805C*B*	28,400	22,400	15.0	12.5	990	7516594
	CSCF3642N6D*+TXV	G*EC960803BNA*	28,400	22,400	14.5	12.2	950	7516591
	CSCF3642N6D*+TXV	G*E81005C*B*	28,400	22,400	15.0	12.5	1,000	7516587
	CSCF3642N6D*+TXV	A*VC80805C*B*	28,400	22,400	15.0	12.5	990	7516577
	CSCF3642N6D*+TXV	G*EC960603BNA*	28,400	22,400	14.5	12.2	965	7516590
	CSCF3642N6D*+TXV	G*VC960803BNA*	28,400	22,400	15.0	12.5	975	7516598
	CSCF3642N6D*+TXV	A*EC960803BNA*	28,400	22,400	14.5	12.2	950	7516574
	CSCF3642N6D*+TXV	G*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7516601
	CSCF3642N6D*+TXV	A*EC961004CNA*	28,400	22,400	14.5	12.2	1,025	7516575
	CSCF3642N6D*+TXV	G*VC80604B*B*	28,600	22,600	15.0	12.5	1,000	7516593
	CSCF3642N6D*+TXV	A*EC960402BNA*	28,400	22,400	14.5	12.2	925	7516572
	CSCF3642N6D*+TXV	A*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7516584
	CSCF3642N6D*+TXV	G*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7516599
	CSCF3642N6D*+TXV	G*E80805C*B*	28,400	22,400	15.0	12.5	1,000	7516586
	CSCF3642N6D*+TXV	A*VC81005C*B*	28,600	22,600	15.0	12.5	1,000	7516578
	CSCF3642N6D*+TXV	A*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7516582
	CSCF3642N6D*+TXV	G*VC960403BNA*	28,600	22,600	15.0	12.5	1,000	7516596
	CSCF3642N6D*+TXV	G*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7516600
	CSCF3642N6D*+TXV	A*VC960403BNA*	28,600	22,600	15.0	12.5	1,000	7516579
	CSCF3642N6D*+TXV	A*VC80604B*B*	28,600	22,600	15.0	12.5	1,000	7516576
	CSCF3642N6D*+TXV	A*VC960603BNA*	28,400	22,400	15.0	12.5	1,040	7516580
	CSCF3642N6D*+TXV	G*E80603B*B*	28,600	22,600	15.0	12.5	1,050	7516585
	CSCF3642N6D*+TXV	A*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7516583
	CSCF3642N6D*+TXV	G*EC961004CNA*	28,400	22,400	14.5	12.2	1,025	7516592
	CSCF3642N6D*+TXV	A*VC960803BNA*	28,400	22,400	15.0	12.5	975	7516581
	CSCF3642N6D*+TXV	G*EC960302BNA*	28,400	22,400	14.5	12.2	940	7516588
	CSCF3642N6D*+TXV	A*EC960603BNA*	28,400	22,400	14.5	12.2	965	7516573
	CSCF3642N6D*+TXV	G*EC960402BNA*	28,400	22,400	14.5	12.2	925	7516589
	CSCF3642N6D*+TXV	G*VC960603BNA*	28,400	22,400	15.0	12.5	1,040	7516597
	CSCF3642N6D*+TXV	G*VC81005C*B*	28,600	22,600	15.0	12.5	1,000	7516595
	CSCF3642N6D*+TXV	A*EC960302BNA*	28,400	22,400	14.5	12.2	940	7516571
GSX14 0361K*	ARUF37C14A*		33,600	25,000	14.0	11.5	1,050	7984196
	ARUF37D14A*		33,600	25,000	14.0	11.5	1,240	8171723
	ASPT36C14A*		34,200	25,400	14.5	11.5	1,210	7516606
	ASPT37C14A*		34,200	25,400	14.5	12.0	1,120	8242062
	ASPT39C14A*		34,200	25,400	14.0	11.5	1,220	10206640
	ASPT47C14A*		34,200	25,400	14.5	12.0	1,120	8242063
	ASPT47D14A*		34,600	25,600	15.0	12.5	1,205	8242064
	AVPTC36C14A*		34,200	25,400	14.5	11.5	1,100	7516608
	AVPTC37C14A*		34,200	25,400	14.5	12.0	1,130	8996140
	AVPTC37D14A*		34,600	25,600	14.5	12.2	1,145	8996141
	AVPTC39C14A*		34,200	25,400	14.5	11.5	1,220	10206663
	AVPTC42D14A*		34,800	25,800	14.5	12.0	1,120	7516609
	AVPTC49D14A*		35,000	26,000	15.0	12.5	1,075	8996142
	AWUF37XX16B*+TXV		33,000	24,400	14.5	11.5	1,050	7516610
	CA*F3137*6A*+EEP		34,000	25,200	14.0	11.5	1,200	8187479
	CA*F3137*6A*+EEP+TXV		34,000	25,200	14.0	11.5	1,200	8187480
	CA*F3137*6A*+TXV	G*EC960603ANA*	34,000	25,200	14.0	11.5	1,125	10516030
	CA*F3137*6A*+TXV	G*EC960403BNA*	34,200	25,400	14.0	11.5	1,050	10338227
	CA*F3137*6A*+TXV	G*VC80603B*B*	33,400	25,400	14.5	12.0	1,200	9923378
	CA*F3137*6A*+TXV	G*VC80803B*B*	33,400	25,400	14.5	12.0	1,150	9923383
	CA*F3137*6A*+TXV	A*VC80604B*B*	33,600	25,000	14.0	11.5	1,240	8187501
	CA*F3137*6A*+TXV	A*EH800603B*A*	33,400	24,800	14.0	11.5	1,100	8187500
	CA*F3137*6A*+TXV	G*VC960803BNA*	34,400	25,400	14.0	11.5	1,150	8187485

See Notes on Page 71.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0361K* (Contd.)	CA*F3137*6A*+TXV	G*VM970803BNA*	34,400	25,400	14.0	11.5	1,150	8187487
	CA*F3137*6A*+TXV	A*EC960803BNA*	34,200	25,400	14.0	11.5	1,100	8187508
	CA*F3137*6A*+TXV	A*VM970803BNA*	34,400	25,400	14.0	11.5	1,150	8187506
	CA*F3137*6A*+TXV	G*VC960603BNA*	34,400	25,400	14.0	11.5	1,200	8187484
	CA*F3137*6A*+TXV	A*VC960803BNA*	34,400	25,400	14.0	11.5	1,150	8187504
	CA*F3137*6A*+TXV	G*EC960603BNA*	34,200	25,400	14.0	11.5	1,100	8187488
	CA*F3137*6A*+TXV	G*VC960403BNA*	34,200	25,400	14.0	11.5	1,200	8187483
	CA*F3137*6A*+TXV	A*VC960603BNA*	34,400	25,400	14.0	11.5	1,200	8187503
	CA*F3137*6A*+TXV	G*E80603B*B*	33,400	24,800	14.0	11.5	1,100	8187481
	CA*F3137*6A*+TXV	G*EC960803BNA*	34,200	25,400	14.0	11.5	1,100	8187489
	CA*F3137*6A*+TXV	A*VM970603BNA*	34,400	25,400	14.0	11.5	1,200	8187505
	CA*F3137*6A*+TXV	A*VC960403BNA*	34,200	25,400	14.0	11.5	1,200	8187502
	CA*F3137*6A*+TXV	G*VC80604B*B*	33,600	25,000	14.0	11.5	1,240	8187482
	CA*F3137*6A*+TXV	G*VM970603BNA*	34,400	25,400	14.0	11.5	1,200	8187486
	CA*F3137*6A*+TXV	A*EC960603BNA*	34,200	25,400	14.0	11.5	1,100	8187507
	CA*F3642*6D*+EEP		34,000	25,200	14.0	11.5	1,200	7516611
	CA*F3642*6D*+EEP+TXV		34,000	25,200	14.0	11.5	1,200	7516612
	CA*F3642*6D*+MBVC1600**-1A*		34,000	25,200	14.5	11.5	1,200	7516613
	CA*F3642*6D*+MBVC2000**-1A*		34,000	25,200	14.5	12.0	1,200	7516614
	CA*F3743*6D*	G*VC80805D*B*	33,600	25,600	14.5	11.5	1,200	9923392
	CA*F3743*6D*	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516675
	CA*F3743*6D*	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516658
	CA*F3743*6D*	A*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7516664
	CA*F3743*6D*	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516666
	CA*F3743*6D*	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516673
	CA*F3743*6D*	A*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7516659
	CA*F3743*6D*	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516670
	CA*F3743*6D*	A*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7516667
	CA*F3743*6D*	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516663
	CA*F3743*6D*	G*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7516671
	CA*F3743*6D*	G*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7516676
	CA*F3743*6D*	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516678
	CA*F3743*6D*	G*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7516672
	CA*F3743*6D*	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7516668
	CA*F3743*6D*	A*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7516662
	CA*F3743*6D*	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516677
	CA*F3743*6D*	G*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7516679
	CA*F3743*6D*	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516665
	CA*F3743*6D*	A*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7516660
	CA*F3743*6D*	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7516669
	CA*F3743*6D*	G*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7516674
	CA*F3743*6D*	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516661
	CA*F3743*6D*+EEP		34,600	25,600	14.0	11.5	1,200	7516615
	CA*F3743*6D*+EEP+TXV		34,600	25,600	14.5	11.5	1,200	7516616
	CA*F3743*6D*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7516617
	CA*F3743*6D*+MBVC2000**-1A*		35,000	26,000	14.5	11.5	1,200	7516618
	CA*F3743*6D*+TXV	G*VC80603B*B*	33,400	25,400	14.5	11.5	1,200	9923379
	CA*F3743*6D*+TXV	G*VC80803B*B*	33,400	25,400	14.5	11.5	1,150	9923384
	CA*F3743*6D*+TXV	G*VC80804C*B*	33,600	25,600	14.5	11.5	1,250	9923388
	CA*F3743*6D*+TXV	G*VC80805D*B*	33,600	25,600	14.5	12.0	1,200	9923393
	CA*F3743*6D*+TXV	A*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7516631
	CA*F3743*6D*+TXV	A*EC960603BNA*	34,200	25,400	14.5	11.5	1,150	7516619
	CA*F3743*6D*+TXV	A*EC960803BNA*	34,200	25,400	14.5	11.5	1,150	7516620
	CA*F3743*6D*+TXV	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516655
	CA*F3743*6D*+TXV	A*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7516633
	CA*F3743*6D*+TXV	G*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7516652
	CA*F3743*6D*+TXV	G*E80603B*B*	33,400	24,800	14.5	11.5	1,250	7516637
	CA*F3743*6D*+TXV	A*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7516632
	CA*F3743*6D*+TXV	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516621

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0361K* (Contd.)	CA*F3743*6D*+TXV	G*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7516653
	CA*F3743*6D*+TXV	G*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7516647
	CA*F3743*6D*+TXV	G*EC960603BNA*	34,200	25,400	14.5	11.5	1,150	7516640
	CA*F3743*6D*+TXV	G*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7516649
	CA*F3743*6D*+TXV	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7516638
	CA*F3743*6D*+TXV	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516634
	CA*F3743*6D*+TXV	G*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7516654
	CA*F3743*6D*+TXV	G*VC81005C*B*	33,400	24,800	14.5	12.0	1,200	7516646
	CA*F3743*6D*+TXV	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516656
	CA*F3743*6D*+TXV	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516642
	CA*F3743*6D*+TXV	G*EC960803BNA*	34,200	25,400	14.5	11.5	1,150	7516641
	CA*F3743*6D*+TXV	A*VC961005CNA*	34,600	25,600	14.5	12.0	1,175	7516630
	CA*F3743*6D*+TXV	A*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7516628
	CA*F3743*6D*+TXV	G*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7516644
	CA*F3743*6D*+TXV	A*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7516636
	CA*F3743*6D*+TXV	G*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7516657
	CA*F3743*6D*+TXV	A*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7516623
	CA*F3743*6D*+TXV	A*EC961205DNA*	34,000	25,200	14.5	12.0	1,075	7516622
	CA*F3743*6D*+TXV	G*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7516645
	CA*F3743*6D*+TXV	A*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7516626
	CA*F3743*6D*+TXV	G*EC961205DNA*	34,000	25,200	14.5	12.0	1,075	7516643
	CA*F3743*6D*+TXV	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516635
	CA*F3743*6D*+TXV	G*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7516648
	CA*F3743*6D*+TXV	G*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7516650
	CA*F3743*6D*+TXV	A*VC81005C*B*	33,400	24,800	14.5	12.0	1,200	7516625
	CA*F3743*6D*+TXV	A*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7516627
	CA*F3743*6D*+TXV	A*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7516624
	CA*F3743*6D*+TXV	G*VC961005CNA*	34,600	25,600	14.5	12.0	1,175	7516651
	CA*F3743*6D*+TXV	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7516639
	CA*F3743*6D*+TXV	A*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7516629
	CA*F4860*6D*+EEP		34,800	25,800	14.0	11.5	1,200	7516680
	CA*F4860*6D*+EEP+TXV		34,800	25,800	14.0	11.5	1,200	7516681
	CAPT3743*4A*	G*VC80603B*B*	33,600	25,600	14.5	11.5	1,200	9923380
	CAPT3743*4A*	G*VC80803B*B*	33,600	25,600	14.5	11.5	1,150	9923385
	CAPT3743*4A*	G*VC80804C*B*	33,600	25,600	14.5	11.5	1,250	9923389
	CAPT3743*4A*	G*VC80805D*B*	33,600	25,600	14.5	11.5	1,200	9923394
	CAPT3743*4A*	G*VC960603BNA*	34,200	25,400	14.5	11.5	1,250	7516705
	CAPT3743*4A*	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516713
	CAPT3743*4A*	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516691
	CAPT3743*4A*	G*VM970603BNA*	34,200	25,400	14.5	11.5	1,250	7516710
	CAPT3743*4A*	A*EC960803BNA*	34,200	25,400	14.0	11.5	1,150	7516683
	CAPT3743*4A*	G*VC960803BNA*	34,200	25,400	14.5	11.5	1,250	7516706
	CAPT3743*4A*	A*VC960803BNA*	34,200	25,400	14.5	11.5	1,250	7516689
	CAPT3743*4A*	G*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7516701
	CAPT3743*4A*	A*VM971205DNA*	34,400	25,400	14.5	11.5	1,200	7516697
	CAPT3743*4A*	A*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7516719
	CAPT3743*4A*	A*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7516685
	CAPT3743*4A*	G*VC961205DNA*	34,400	25,400	14.5	11.5	1,200	7516709
	CAPT3743*4A*	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516712
	CAPT3743*4A*	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516718
	CAPT3743*4A*	A*VC961205DNA*	34,400	25,400	14.5	11.5	1,200	7516692
	CAPT3743*4A*	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516686
	CAPT3743*4A*	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7516698
	CAPT3743*4A*	A*VM970803BNA*	34,200	25,400	14.5	11.5	1,250	7516694
	CAPT3743*4A*	A*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7516684
	CAPT3743*4A*	A*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7516690
	CAPT3743*4A*	A*EC960603BNA*	34,200	25,400	14.0	11.5	1,150	7516717
	CAPT3743*4A*	A*VM970603BNA*	34,200	25,400	14.5	11.5	1,250	7516693
	CAPT3743*4A*	G*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7516707

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0361K* (Contd.)	CAPT3743*4A*	A*VC960603BNA*	34,200	25,400	14.5	11.5	1,250	7516688
	CAPT3743*4A*	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516696
	CAPT3743*4A*	G*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7516702
	CAPT3743*4A*	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516708
	CAPT3743*4A*	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516695
	CAPT3743*4A*	G*EC960603BNA*	34,200	25,400	14.0	11.5	1,150	7516720
	CAPT3743*4A*	G*VM971205DNA*	34,400	25,400	14.5	11.5	1,200	7516714
	CAPT3743*4A*	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516703
	CAPT3743*4A*	G*EC960803BNA*	34,200	25,400	14.0	11.5	1,150	7516700
	CAPT3743*4A*	G*VC960403BNA*	34,000	25,200	14.5	11.5	1,200	7516704
	CAPT3743*4A*	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7516699
	CAPT3743*4A*	A*VC960403BNA*	34,000	25,200	14.5	11.5	1,200	7516687
	CAPT3743*4A*	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516721
	CAPT3743*4A*	G*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7516722
	CAPT3743*4A*	G*VM970803BNA*	34,200	25,400	14.5	11.5	1,250	7516711
	CAPT3743*4A*+EEP		34,600	25,600	14.5	11.5	1,200	7516682
	CAPT3743*4A*+MBVC1600**-1A*		34,000	25,200	14.5	11.5	1,205	7516715
	CAPT3743*4A*+MBVC2000**-1A*		34,000	25,200	14.5	11.5	1,205	7516716
	CHPF3636B6C*+TXV	G*EC960403BNA*	34,200	25,400	14.0	11.5	1,050	10338228
	CHPF3636B6C*+TXV	G*VC80604B*B*	34,000	25,200	14.0	11.5	1,220	9141036
	CHPF3642C6C*	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7516731
	CHPF3642C6C*	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7516732
	CHPF3642C6C*+EEP		34,600	25,600	14.0	11.5	1,200	7516723
	CHPF3642C6C*+EEP+TXV		34,600	25,600	14.0	11.5	1,200	7516724
	CHPF3642C6C*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7516733
	CHPF3642C6C*+TXV	G*E81005C*B*	34,000	25,200	14.5	12.0	1,230	7516728
	CHPF3642C6C*+TXV	A*EC960603BNA*	34,200	25,400	14.5	11.5	1,150	7516725
	CHPF3642C6C*+TXV	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7516727
	CHPF3642C6C*+TXV	G*E80603B*B*	33,400	24,800	14.5	11.5	1,250	7516734
	CHPF3642C6C*+TXV	G*EC960603BNA*	34,200	25,400	14.5	11.5	1,150	7516729
	CHPF3642C6C*+TXV	A*EC960803BNA*	34,200	25,400	14.5	11.5	1,150	7516726
	CHPF3642C6C*+TXV	G*EC960803BNA*	34,200	25,400	14.5	11.5	1,150	7516730
	CHPF3743C6B*	G*VC80805D*B*	33,600	25,600	14.5	11.5	1,100	9923395
	CHPF3743C6B*	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516764
	CHPF3743C6B*	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516767
	CHPF3743C6B*	A*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7516761
	CHPF3743C6B*	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516762
	CHPF3743C6B*	G*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7516766
	CHPF3743C6B*	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516769
	CHPF3743C6B*	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516765
	CHPF3743C6B*	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7520315
	CHPF3743C6B*	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516774
	CHPF3743C6B*	A*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7516763
	CHPF3743C6B*	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516770
	CHPF3743C6B*	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7520314
	CHPF3743C6B*	G*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7516768
	CHPF3743C6B*	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516775
	CHPF3743C6B*+EEP		34,000	25,200	14.0	11.5	1,150	7516735
	CHPF3743C6B*+EEP+TXV		34,000	25,200	14.5	11.5	1,150	7516736
	CHPF3743C6B*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7516771
	CHPF3743C6B*+TXV	G*VC80603B*B*	33,600	25,600	14.5	12.0	1,100	9923381
	CHPF3743C6B*+TXV	G*VC80803B*B*	33,600	25,600	14.5	12.0	1,150	9923386
	CHPF3743C6B*+TXV	G*VC80804C*B*	33,600	25,600	14.5	11.5	1,100	9923390
	CHPF3743C6B*+TXV	G*VC80805D*B*	33,600	25,600	14.5	12.0	1,100	9923396
	CHPF3743C6B*+TXV	G*VC961005CNA*	34,600	25,600	14.5	12.0	1,175	7516756
	CHPF3743C6B*+TXV	G*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7516755
	CHPF3743C6B*+TXV	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516748
	CHPF3743C6B*+TXV	G*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7516750
	CHPF3743C6B*+TXV	G*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7516753

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0361K* (Contd.)	CHPF3743C6B*+TXV	G*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7516749
	CHPF3743C6B*+TXV	G*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7516754
	CHPF3743C6B*+TXV	A*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7516737
	CHPF3743C6B*+TXV	G*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7516758
	CHPF3743C6B*+TXV	G*VC81005C*B*	33,400	24,800	14.5	12.0	1,200	7516751
	CHPF3743C6B*+TXV	A*VC81005C*B*	33,400	24,800	14.5	12.0	1,200	7516739
	CHPF3743C6B*+TXV	A*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7516738
	CHPF3743C6B*+TXV	A*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7516742
	CHPF3743C6B*+TXV	A*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7516743
	CHPF3743C6B*+TXV	A*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7516746
	CHPF3743C6B*+TXV	A*VC961005CNA*	34,600	25,600	14.5	12.0	1,175	7516744
	CHPF3743C6B*+TXV	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516760
	CHPF3743C6B*+TXV	G*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7516752
	CHPF3743C6B*+TXV	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516772
	CHPF3743C6B*+TXV	G*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7516757
	CHPF3743C6B*+TXV	A*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7516741
	CHPF3743C6B*+TXV	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516747
	CHPF3743C6B*+TXV	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516759
	CHPF3743C6B*+TXV	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7516773
	CHPF3743C6B*+TXV	A*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7516740
	CHPF3743C6B*+TXV	A*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7516745
	CHPF3743D6B*	A*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7516785
	CHPF3743D6B*	G*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7516789
	CHPF3743D6B*	G*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7516787
	CHPF3743D6B*	G*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7516786
	CHPF3743D6B*	A*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7516784
	CHPF3743D6B*	A*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7516788
	CHPF3743D6B*+EEP		34,600	25,600	14.5	11.5	1,150	7516776
	CHPF3743D6B*+EEP+TXV		34,600	25,600	14.5	12.0	1,150	7516777
	CHPF3743D6B*+TXV	G*EC961205DNA*	34,000	25,200	14.5	12.0	1,075	7516781
	CHPF3743D6B*+TXV	G*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7516783
	CHPF3743D6B*+TXV	A*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7516779
	CHPF3743D6B*+TXV	G*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7516782
	CHPF3743D6B*+TXV	A*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7516780
	CHPF3743D6B*+TXV	A*EC961205DNA*	34,000	25,200	14.5	12.0	1,075	7516778
	CSCF4860N6D*	G*VC80805D*B*	33,600	25,600	14.5	11.5	1,200	9923397
	CSCF4860N6D*	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516827
	CSCF4860N6D*	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516835
	CSCF4860N6D*	G*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7516836
	CSCF4860N6D*	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516828
	CSCF4860N6D*	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7516830
	CSCF4860N6D*	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516838
	CSCF4860N6D*	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516833
	CSCF4860N6D*	G*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7516839
	CSCF4860N6D*	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516825
	CSCF4860N6D*	G*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7516834
	CSCF4860N6D*	A*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7516822
	CSCF4860N6D*	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7516831
	CSCF4860N6D*	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516837
	CSCF4860N6D*	A*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7516829
	CSCF4860N6D*	A*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7516824
	CSCF4860N6D*	G*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7516832
	CSCF4860N6D*	A*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7516826
	CSCF4860N6D*	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516823
	CSCF4860N6D*+EEP		34,600	25,600	14.0	11.5	1,200	7516790
	CSCF4860N6D*+EEP+TXV		34,600	25,600	14.0	11.5	1,200	7516791
	CSCF4860N6D*+TXV	G*VC80603B*B*	33,400	25,400	14.5	11.5	1,200	9923382
	CSCF4860N6D*+TXV	G*VC80803B*B*	33,400	25,400	14.5	11.5	1,150	9923387
	CSCF4860N6D*+TXV	G*VC80804C*B*	33,600	25,600	14.5	11.5	1,250	9923391

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0361K* (Contd.)	CSCF4860N6D*+TXV	G*VC80805D*B*	33,600	25,600	14.5	12.0	1,200	9923398
	CSCF4860N6D*+TXV	G*E81005C*B*	34,000	25,200	14.5	12.0	1,230	7516807
	CSCF4860N6D*+TXV	A*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7516805
	CSCF4860N6D*+TXV	A*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7516792
	CSCF4860N6D*+TXV	G*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7516816
	CSCF4860N6D*+TXV	A*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7516802
	CSCF4860N6D*+TXV	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516794
	CSCF4860N6D*+TXV	G*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7516814
	CSCF4860N6D*+TXV	G*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7516809
	CSCF4860N6D*+TXV	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7516810
	CSCF4860N6D*+TXV	A*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7516795
	CSCF4860N6D*+TXV	A*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7516798
	CSCF4860N6D*+TXV	A*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7516800
	CSCF4860N6D*+TXV	G*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7516811
	CSCF4860N6D*+TXV	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516799
	CSCF4860N6D*+TXV	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7516815
	CSCF4860N6D*+TXV	A*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7516796
	CSCF4860N6D*+TXV	G*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7516812
	CSCF4860N6D*+TXV	G*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7516813
	CSCF4860N6D*+TXV	G*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7516808
	CSCF4860N6D*+TXV	A*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7516797
	CSCF4860N6D*+TXV	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516803
	CSCF4860N6D*+TXV	A*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7516801
	CSCF4860N6D*+TXV	G*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7516818
	CSCF4860N6D*+TXV	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7516806
	CSCF4860N6D*+TXV	G*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7516817
	CSCF4860N6D*+TXV	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7516819
	CSCF4860N6D*+TXV	G*E80603B*B*	33,400	24,800	14.5	11.5	1,250	7516840
	CSCF4860N6D*+TXV	A*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7516793
	CSCF4860N6D*+TXV	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516820
	CSCF4860N6D*+TXV	G*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7516821
	CSCF4860N6D*+TXV	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7516804
GSX14 0371K*	ARUF37C14A*+TXV		33,400	25,200	14.0	12.2	1,050	7984197
	ARUF37D14A*		34,200	25,800	14.0	12.2	1,240	8171724
	ARUF49C14A*		34,000	25,800	14.0	12.2	1,220	7984198
	ASPT35B14A*		32,400	24,526.8	14	12.2	1,050	10341505
	ASPT36C14A*		34,200	25,800	14.5	12.5	1,210	7516841
	ASPT37C14A*		34,200	25,800	14.5	12.2	1,120	8242065
	ASPT39C14A*		34,200	25,800	14.5	12.2	1,220	10206641
	ASPT47C14A*		34,200	25,800	14.5	12.2	1,120	8242066
	ASPT47D14A*		34,600	26,200	15.0	12.5	1,205	8242067
	AVPTC36C14A*		34,000	25,800	14.5	12.2	1,100	7516843
	AVPTC37C14A*		34,000	25,800	14.5	12.2	1,130	8996143
	AVPTC37D14A*		34,600	26,200	15.0	12.5	1,145	8996144
	AVPTC39C14A*		34,200	25,800	14.5	12.2	1,250	10206664
	AVPTC42D14A*		34,800	26,400	15.0	12.5	1,120	7516844
	AVPTC49D14A*		34,600	26,200	15.0	12.5	1,075	8996145
	AWUF37XX16B*+TXV		33,000	25,000	14.5	12.2	355	7516845
	CA*F3137*6A*	G*VC80603B*B*	33,400	26,000	14.5	12.2	1,100	9923399
	CA*F3137*6A*	G*VC80803B*B*	33,400	26,000	14.5	12.2	1,150	9923404
	CA*F3137*6A*	G*VC960403BNA*	34,000	25,800	15.0	12.5	1,200	7520324
	CA*F3137*6A*	A*VM970803BNA*	34,000	25,800	15.0	12.5	1,250	7520321
	CA*F3137*6A*	A*VC960403BNA*	34,000	25,800	15.0	12.5	1,200	7520317
	CA*F3137*6A*	A*VC960603BNA*	34,000	25,800	15.0	12.5	1,250	7520318
	CA*F3137*6A*	G*VC80604B*B*	33,600	25,400	15.0	12.5	1,220	7520323
	CA*F3137*6A*	G*VM970603BNA*	34,000	25,800	15.0	12.5	1,250	7520327
	CA*F3137*6A*	A*VC960803BNA*	34,000	25,800	15.0	12.5	1,250	7520319
	CA*F3137*6A*	G*E80603B*B*	33,400	25,200	14.5	12.2	1,225	7520322
	CA*F3137*6A*	G*VM970803BNA*	34,000	25,800	15.0	12.5	1,250	7520328

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0371K* (Contd.)	CA*F3137*6A*	A*VC80604B*B*	33,600	25,400	15.0	12.5	1,220	7520316
	CA*F3137*6A*	A*VM970603BNA*	34,000	25,800	15.0	12.5	1,250	7520320
	CA*F3137*6A*	G*VC960603BNA*	34,000	25,800	15.0	12.5	1,250	7520325
	CA*F3137*6A*	G*VC960803BNA*	34,000	25,800	15.0	12.5	1,250	7520326
	CA*F3137*6A*+EEP		34,000	25,800	14.0	12.2	1,100	7516868
	CA*F3137*6A*+EEP+TXV		34,000	25,800	14.0	12.2	1,100	7516869
	CA*F3743*6D*	G*VC80805D*B*	33,600	26,200	14.5	12.2	1,200	9923413
	CA*F3743*6D*	A*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7516933
	CA*F3743*6D*	G*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7516947
	CA*F3743*6D*	G*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7516952
	CA*F3743*6D*	A*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7516937
	CA*F3743*6D*	A*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7516936
	CA*F3743*6D*	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7516938
	CA*F3743*6D*	A*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7516934
	CA*F3743*6D*	G*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7516951
	CA*F3743*6D*	G*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7516946
	CA*F3743*6D*	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7516953
	CA*F3743*6D*	A*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7516932
	CA*F3743*6D*	G*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7516945
	CA*F3743*6D*	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7516950
	CA*F3743*6D*	G*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7516944
	CA*F3743*6D*	G*E80805C*B*	33,600	25,400	14.5	12.2	1,210	7516942
	CA*F3743*6D*	G*E81005C*B*	34,000	25,800	14.5	12.2	1,200	7516943
	CA*F3743*6D*	G*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7516949
	CA*F3743*6D*	A*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7516939
	CA*F3743*6D*	A*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7516940
	CA*F3743*6D*	A*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7516935
	CA*F3743*6D*	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7516941
	CA*F3743*6D*	G*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7516948
	CA*F3743*6D*+EEP		34,000	25,800	14.0	12.2	1,200	7516891
	CA*F3743*6D*+EEP+TXV		34,000	25,800	14.5	12.2	1,200	7516892
	CA*F3743*6D*+MBVC1600**-1A*		34,600	26,200	14.5	12.2	1,200	7516893
	CA*F3743*6D*+MBVC1600**-1A*+TXV		34,600	26,200	14.5	12.2	1,200	7516894
	CA*F3743*6D*+MBVC2000**-1A*		34,600	26,200	15.0	12.5	1,200	7516895
	CA*F3743*6D*+MBVC2000**-1A*+TXV		34,600	26,200	15.0	12.5	1,200	7516896
	CA*F3743*6D*+TXV	G*VC80603B*B*	33,400	26,000	14.5	12.2	1,100	9923400
	CA*F3743*6D*+TXV	G*VC80803B*B*	33,400	26,000	14.5	12.2	1,150	9923405
	CA*F3743*6D*+TXV	G*VC80804C*B*	33,600	26,200	14.5	12.2	1,250	9923409
	CA*F3743*6D*+TXV	G*VC80805D*B*	33,600	26,200	15.0	12.5	1,200	9923414
	CA*F3743*6D*+TXV	A*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7516900
	CA*F3743*6D*+TXV	G*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7516920
	CA*F3743*6D*+TXV	A*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7516910
	CA*F3743*6D*+TXV	A*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7516901
	CA*F3743*6D*+TXV	A*VC960403BNA*	34,000	25,800	14.5	12.2	1,200	7516902
	CA*F3743*6D*+TXV	G*E80805C*B*	33,600	25,400	15.0	12.5	1,210	7516914
	CA*F3743*6D*+TXV	A*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7516903
	CA*F3743*6D*+TXV	G*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7516922
	CA*F3743*6D*+TXV	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7516907
	CA*F3743*6D*+TXV	G*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7516919
	CA*F3743*6D*+TXV	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7516912
	CA*F3743*6D*+TXV	G*E80603B*B*	33,400	25,200	14.5	12.2	1,225	7516913
	CA*F3743*6D*+TXV	G*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7516925
	CA*F3743*6D*+TXV	A*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7516897
	CA*F3743*6D*+TXV	G*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7516916
	CA*F3743*6D*+TXV	G*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7516929
	CA*F3743*6D*+TXV	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7516926
	CA*F3743*6D*+TXV	A*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7516911
	CA*F3743*6D*+TXV	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7516931
	CA*F3743*6D*+TXV	G*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7516924

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0371K* (Contd.)	CA*F3743*6D*+TXV	A*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7516906
	CA*F3743*6D*+TXV	A*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7516905
	CA*F3743*6D*+TXV	A*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7516904
	CA*F3743*6D*+TXV	A*VM970603BNA*	34,200	25,800	14.5	12.2	1,250	7516908
	CA*F3743*6D*+TXV	G*VC960403BNA*	34,000	25,800	14.5	12.2	1,200	7516921
	CA*F3743*6D*+TXV	G*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7516917
	CA*F3743*6D*+TXV	G*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7516928
	CA*F3743*6D*+TXV	A*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7516899
	CA*F3743*6D*+TXV	A*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7516898
	CA*F3743*6D*+TXV	G*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7516923
	CA*F3743*6D*+TXV	G*E81005C*B*	34,000	25,800	15.0	12.5	1,200	7516915
	CA*F3743*6D*+TXV	A*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7516909
	CA*F3743*6D*+TXV	G*VM970603BNA*	34,200	25,800	14.5	12.2	1,250	7516927
	CA*F3743*6D*+TXV	G*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7516930
	CA*F3743*6D*+TXV	G*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7516918
	CAPT3743*4A*	G*VC80603B*B*	33,600	26,200	15.0	12.2	1,100	9923401
	CAPT3743*4A*	G*VC80803B*B*	33,600	26,200	15.0	12.2	1,150	9923406
	CAPT3743*4A*	G*VC80804C*B*	33,600	26,200	14.5	12.2	1,250	9923410
	CAPT3743*4A*	G*VC80805D*B*	33,600	26,200	15.0	12.2	1,200	9923415
	CAPT3743*4A*	A*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7516959
	CAPT3743*4A*	A*VM971205DNA*	34,400	26,000	15.0	12.5	1,200	7516972
	CAPT3743*4A*	A*VC961205DNA*	34,400	26,000	15.0	12.5	1,200	7516967
	CAPT3743*4A*	A*VC960403BNA*	34,000	25,800	14.5	12.2	1,200	7516962
	CAPT3743*4A*	G*VC960603BNA*	34,200	25,800	14.5	12.2	1,250	7516981
	CAPT3743*4A*	G*VM971205DNA*	34,400	26,000	15.0	12.5	1,200	7516990
	CAPT3743*4A*	A*VC81005C*B*	33,400	25,200	15.0	12.2	1,200	7516961
	CAPT3743*4A*	G*VC81005C*B*	33,400	25,200	15.0	12.2	1,200	7516979
	CAPT3743*4A*	G*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7516976
	CAPT3743*4A*	G*VM971005CNA*	34,600	26,200	15.0	12.2	1,175	7516989
	CAPT3743*4A*	A*VM971005CNA*	34,600	26,200	15.0	12.2	1,175	7516971
	CAPT3743*4A*	G*E80805C*B*	33,600	25,400	14.5	12.2	1,210	7516973
	CAPT3743*4A*	A*VC960603BNA*	34,200	25,800	14.5	12.2	1,250	7516963
	CAPT3743*4A*	G*VC961005CNA*	34,600	26,200	15.0	12.2	1,175	7516984
	CAPT3743*4A*	G*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7516977
	CAPT3743*4A*	A*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7516958
	CAPT3743*4A*	G*VC80805C*B*	33,600	25,400	15.0	12.2	1,200	7516978
	CAPT3743*4A*	G*E81005C*B*	34,000	25,800	14.5	12.2	1,200	7516974
	CAPT3743*4A*	A*VM970804CNA*	34,600	26,200	15.0	12.2	1,190	7516970
	CAPT3743*4A*	G*VC961205DNA*	34,400	26,000	15.0	12.5	1,200	7516985
	CAPT3743*4A*	A*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7516957
	CAPT3743*4A*	G*VM970603BNA*	34,200	25,800	14.5	12.2	1,250	7516986
	CAPT3743*4A*	G*VC960804CNA*	34,600	26,200	15.0	12.2	1,190	7516983
	CAPT3743*4A*	A*VM970803BNA*	34,200	25,800	14.5	12.2	1,250	7516969
	CAPT3743*4A*	A*VC960803BNA*	34,200	25,800	14.5	12.2	1,250	7516964
	CAPT3743*4A*	G*VM970804CNA*	34,600	26,200	15.0	12.2	1,190	7516988
	CAPT3743*4A*	A*VC960804CNA*	34,600	26,200	15.0	12.2	1,190	7516965
	CAPT3743*4A*	G*VC960403BNA*	34,000	25,800	14.5	12.2	1,200	7516980
	CAPT3743*4A*	G*VM970803BNA*	34,200	25,800	14.5	12.2	1,250	7516987
	CAPT3743*4A*	A*VM970603BNA*	34,200	25,800	14.5	12.2	1,250	7516968
	CAPT3743*4A*	G*VC960803BNA*	34,200	25,800	14.5	12.2	1,250	7516982
	CAPT3743*4A*	A*VC961005CNA*	34,600	26,200	15.0	12.2	1,175	7516966
	CAPT3743*4A*	G*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7516975
	CAPT3743*4A*	A*VC80805C*B*	33,600	25,400	15.0	12.2	1,200	7516960
	CAPT3743*4A*+EEP		34,000	25,800	14.5	12.2	1,200	7516954
	CAPT3743*4A*+MBVC1600**-1A*		34,200	25,800	14.5	12.2	1,200	7516955
	CAPT3743*4A*+MBVC2000**-1A*		34,200	25,800	14.5	12.2	1,200	7516956
	CHPF3642C6C*	G*E80805C*B*	33,600	25,400	14.5	12.2	1,210	7516998
	CHPF3642C6C*	G*E81005C*B*	34,000	25,800	14.5	12.2	1,200	7516999
	CHPF3642C6C*+EEP		34,000	25,800	14.0	12.2	1,150	7516991

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0371K* (Contd.)	CHPF3642C6C*+EEP+TXV		34,000	25,800	14.0	12.2	1,150	7516992
	CHPF3642C6C*+MBVC1600**-1A*		34,000	25,800	14.5	12.2	1,200	7516993
	CHPF3642C6C*+MBVC1600**-1A*+TXV		34,000	25,800	15.0	12.5	1,200	7516994
	CHPF3642C6C*+TXV	G*E81005C*B*	34,000	25,800	15.0	12.5	1,200	7516997
	CHPF3642C6C*+TXV	G*E80805C*B*	33,600	25,400	15.0	12.5	1,210	7516996
	CHPF3642C6C*+TXV	G*E80603B*B*	33,400	25,200	14.5	12.2	1,225	7516995
	CHPF3743C6B*+MBVC1600**-1A*		34,600	26,200	14.5	12.2	1,200	7517012
	CHPF3743C6B*+MBVC1600**-1A*+TXV		34,600	26,200	15.0	12.5	1,200	7517013
	CHPF3743C6B*+TXV	G*VC80603B*B*	33,600	26,200	15.0	12.5	1,100	9923402
	CHPF3743C6B*+TXV	G*VC80803B*B*	33,600	26,200	15.0	12.5	1,050	9923407
	CHPF3743C6B*+TXV	G*VC80804C*B*	33,600	26,200	14.5	12.2	1,100	9923411
	CHPF3743C6B*+TXV	A*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7517002
	CHPF3743C6B*+TXV	G*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7517008
	CHPF3743C6B*+TXV	G*VM970603BNA*	34,400	26,000	14.5	12.2	1,250	7517010
	CHPF3743C6B*+TXV	G*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7517011
	CHPF3743C6B*+TXV	G*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7517009
	CHPF3743C6B*+TXV	G*VC960403BNA*	34,200	25,800	14.5	12.2	1,200	7517007
	CHPF3743C6B*+TXV	A*VM970603BNA*	34,400	26,000	14.5	12.2	1,250	7517004
	CHPF3743C6B*+TXV	A*VC960403BNA*	34,200	25,800	14.5	12.2	1,200	7517001
	CHPF3743C6B*+TXV	A*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7517003
	CHPF3743C6B*+TXV	A*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7517005
	CHPF3743C6B*+TXV	G*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7517006
	CHPF3743C6B*+TXV	A*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7517000
	CHPF3743D6B*	G*VC80805D*B*	33,600	26,200	14.5	12.2	1,200	9923416
	CHPF3743D6B*	G*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7517048
	CHPF3743D6B*	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7517054
	CHPF3743D6B*	A*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7517043
	CHPF3743D6B*	A*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7517039
	CHPF3743D6B*	A*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7517045
	CHPF3743D6B*	A*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7517046
	CHPF3743D6B*	G*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7517053
	CHPF3743D6B*	G*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7517049
	CHPF3743D6B*	A*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7517041
	CHPF3743D6B*	A*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7517042
	CHPF3743D6B*	A*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7517038
	CHPF3743D6B*	G*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7517051
	CHPF3743D6B*	G*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7517052
	CHPF3743D6B*	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7517047
	CHPF3743D6B*	G*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7517056
	CHPF3743D6B*	G*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7517050
	CHPF3743D6B*	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7517057
	CHPF3743D6B*	G*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7517055
	CHPF3743D6B*	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7517044
	CHPF3743D6B*	A*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7517040
	CHPF3743D6B*+EEP		34,600	26,200	14.5	12.2	1,150	7517015
	CHPF3743D6B*+EEP+TXV		34,600	26,200	15.0	12.5	1,150	7517016
	CHPF3743D6B*+TXV	G*VC80805D*B*	33,600	26,200	15.0	12.5	1,200	9923417
	CHPF3743D6B*+TXV	G*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7517028
	CHPF3743D6B*+TXV	A*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7517026
	CHPF3743D6B*+TXV	A*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7517023
	CHPF3743D6B*+TXV	A*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7517025
	CHPF3743D6B*+TXV	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7517034
	CHPF3743D6B*+TXV	A*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7517019
	CHPF3743D6B*+TXV	G*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7517033
	CHPF3743D6B*+TXV	A*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7517021
	CHPF3743D6B*+TXV	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7517024
	CHPF3743D6B*+TXV	G*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7517029
	CHPF3743D6B*+TXV	G*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7517035
	CHPF3743D6B*+TXV	G*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7517032

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0371K* (Contd.)	CHPF3743D6B*+TXV	A*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7517018
	CHPF3743D6B*+TXV	A*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7517022
	CHPF3743D6B*+TXV	G*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7517030
	CHPF3743D6B*+TXV	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7517027
	CHPF3743D6B*+TXV	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7517037
	CHPF3743D6B*+TXV	A*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7517020
	CHPF3743D6B*+TXV	G*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7517036
	CHPF3743D6B*+TXV	G*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7517031
	CSCF4860N6D*	G*VC80805D*B*	33,600	26,200	14.5	12.2	1,200	9923418
	CSCF4860N6D*	A*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7517095
	CSCF4860N6D*	G*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7517107
	CSCF4860N6D*	G*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7517112
	CSCF4860N6D*	A*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7517099
	CSCF4860N6D*	G*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7517111
	CSCF4860N6D*	A*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7517102
	CSCF4860N6D*	G*E81005C*B*	34,000	25,800	14.5	12.2	1,200	7517106
	CSCF4860N6D*	G*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7517115
	CSCF4860N6D*	G*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7517114
	CSCF4860N6D*	G*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7517108
	CSCF4860N6D*	A*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7517103
	CSCF4860N6D*	A*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7517098
	CSCF4860N6D*	G*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7517109
	CSCF4860N6D*	A*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7517097
	CSCF4860N6D*	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7517113
	CSCF4860N6D*	G*E80805C*B*	33,600	25,400	14.5	12.2	1,210	7517105
	CSCF4860N6D*	G*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7517110
	CSCF4860N6D*	A*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7517096
	CSCF4860N6D*	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7517104
	CSCF4860N6D*	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7517116
	CSCF4860N6D*	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7517101
	CSCF4860N6D*	A*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7517100
	CSCF4860N6D*+EEP		34,600	26,200	14.0	12.2	1,200	7517058
	CSCF4860N6D*+EEP+TXV		34,600	26,200	14.5	12.2	1,200	7517059
	CSCF4860N6D*+TXV	G*VC80603B*B*	33,400	26,000	14.5	12.2	1,100	9923403
	CSCF4860N6D*+TXV	G*VC80803B*B*	33,400	26,000	14.5	12.2	1,150	9923408
	CSCF4860N6D*+TXV	G*VC80804C*B*	33,600	26,200	14.5	12.2	1,250	9923412
	CSCF4860N6D*+TXV	G*VC80805D*B*	33,600	26,200	15.0	12.5	1,200	9923419
	CSCF4860N6D*+TXV	G*E80603B*B*	33,400	25,200	14.5	12.2	1,225	7517076
	CSCF4860N6D*+TXV	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7517094
	CSCF4860N6D*+TXV	G*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7517087
	CSCF4860N6D*+TXV	A*VC960403BNA*	34,200	25,800	14.5	12.2	1,200	7517065
	CSCF4860N6D*+TXV	G*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7517093
	CSCF4860N6D*+TXV	A*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7517066
	CSCF4860N6D*+TXV	A*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7517061
	CSCF4860N6D*+TXV	A*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7517073
	CSCF4860N6D*+TXV	A*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7517072
	CSCF4860N6D*+TXV	A*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7517064
	CSCF4860N6D*+TXV	G*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7517085
	CSCF4860N6D*+TXV	A*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7517060
	CSCF4860N6D*+TXV	G*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7517092
	CSCF4860N6D*+TXV	G*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7517083
	CSCF4860N6D*+TXV	A*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7517063
	CSCF4860N6D*+TXV	A*VM970603BNA*	34,400	26,000	14.5	12.2	1,250	7517071
	CSCF4860N6D*+TXV	G*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7517081
	CSCF4860N6D*+TXV	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7517089
	CSCF4860N6D*+TXV	A*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7517062
	CSCF4860N6D*+TXV	G*VC960403BNA*	34,200	25,800	14.5	12.2	1,200	7517084
	CSCF4860N6D*+TXV	G*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7517080
	CSCF4860N6D*+TXV	G*VM970603BNA*	34,400	26,000	14.5	12.2	1,250	7517090

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0371K* (Contd.)	CSCF4860N6D*+TXV	G*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7517079
	CSCF4860N6D*+TXV	G*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7517088
	CSCF4860N6D*+TXV	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7517075
	CSCF4860N6D*+TXV	A*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7517074
	CSCF4860N6D*+TXV	A*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7517067
	CSCF4860N6D*+TXV	G*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7517091
	CSCF4860N6D*+TXV	G*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7517082
	CSCF4860N6D*+TXV	G*E80805C*B*	33,600	25,400	15.0	12.5	1,210	7517077
	CSCF4860N6D*+TXV	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7517070
	CSCF4860N6D*+TXV	G*E81005C*B*	34,000	25,800	15.0	12.5	1,200	7517078
	CSCF4860N6D*+TXV	A*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7517069
	CSCF4860N6D*+TXV	G*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7517086
	CSCF4860N6D*+TXV	A*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7517068
GSX14 0421K*	ARUF43D14A*		37,400	29,600	14.0	11.5	1,270	8171725
	ARUF43D14A*+TXV		37,600	29,800	14.0	11.5	1,270	8171726
	ARUF47D14A*		37,600	29,800	14.0	11.5	1,375	7984199
	ASPT47D14A*		38,000	30,000	14.5	12.2	1,250	8242118
	ASPT49C14A*		36,200	28,600	14.0	12.0	1,355	10206873
	ASPT49D14A*		39,000	30,800	14.5	12.2	1,425	8242068
	ASPT59C14A*		38,000	30,000	14.0	12.0	1,260	8242069
	AVPTC48D14A*		38,000	30,000	15.0	12.5	1,310	7517119
	AVPTC49C14A*		36,200	28,600	14.0	12.0	1,300	10206665
	AVPTC49D14A*		38,500	30,400	15.0	12.5	1,320	8996147
	AVPTC59C14A*		38,000	30,000	14.0	12.0	1,290	8996146
	CA*F4860*6D*	G*VC80805D*B*	38,000	31,000	14.0	11.5	1,350	9923420
	CA*F4860*6D*	A*VC81005C*B*	38,000	30,000	14.0	11.5	1,370	7517146
	CA*F4860*6D*	G*VC960804CNA*	38,000	30,000	14.0	11.5	1,385	7517158
	CA*F4860*6D*	G*VM971005CNA*	38,000	30,000	14.0	11.5	1,300	7517160
	CA*F4860*6D*	G*EC961205DNA*	38,000	30,000	14.0	11.5	1,400	7517155
	CA*F4860*6D*	G*EC961004CNA*	38,000	30,000	14.0	11.5	1,275	7517154
	CA*F4860*6D*	G*E80805D*A*	38,000	30,000	14.0	11.5	1,425	7517152
	CA*F4860*6D*	A*VC961205DNA*	38,000	30,000	14.0	11.5	1,425	7520333
	CA*F4860*6D*	G*E81005C*B*	38,000	30,000	14.0	11.5	1,425	7517153
	CA*F4860*6D*	A*VM970804CNA*	38,000	30,000	14.0	11.5	1,425	7520334
	CA*F4860*6D*	A*EC961205DNA*	38,000	30,000	14.0	11.5	1,400	7517144
	CA*F4860*6D*	A*VM971205DNA*	38,000	30,000	14.0	11.5	1,300	7517150
	CA*F4860*6D*	G*VC961005CNA*	38,000	30,000	14.0	11.5	1,300	7517159
	CA*F4860*6D*	G*VM970804CNA*	38,000	30,000	14.0	11.5	1,425	7520336
	CA*F4860*6D*	A*VM971005CNA*	38,000	30,000	14.0	11.5	1,300	7517149
	CA*F4860*6D*	G*VC80805C*B*	38,000	30,000	14.0	11.5	1,400	7517156
	CA*F4860*6D*	G*VM971205DNA*	38,000	30,000	14.0	11.5	1,300	7517161
	CA*F4860*6D*	A*VC80805C*B*	38,000	30,000	14.0	11.5	1,400	7517145
	CA*F4860*6D*	A*VC960804CNA*	38,000	30,000	14.0	11.5	1,385	7517147
	CA*F4860*6D*	G*VC961205DNA*	38,000	30,000	14.0	11.5	1,425	7520335
	CA*F4860*6D*	G*E80805C*B*	38,000	30,000	14.0	11.5	1,425	7517151
	CA*F4860*6D*	A*VC961005CNA*	38,000	30,000	14.0	11.5	1,300	7517148
	CA*F4860*6D*	G*VC81005C*B*	38,000	30,000	14.0	11.5	1,370	7517157
	CA*F4860*6D*	A*EC961004CNA*	38,000	30,000	14.0	11.5	1,275	7517143
	CA*F4860*6D*+EEP		38,000	30,000	14.0	11.5	1,400	7517120
	CA*F4860*6D*+EEP+TXV		38,000	30,000	14.0	11.5	1,400	7517121
	CA*F4860*6D*+MBVC1600**-1A*		38,000	30,000	14.5	11.5	1,300	7517122
	CA*F4860*6D*+MBVC2000**-1A*		38,000	30,000	14.5	11.5	1,300	7517123
	CA*F4860*6D*+TXV	G*VC80805D*B*	38,000	31,000	14.5	11.5	1,350	9923421
	CA*F4860*6D*+TXV	A*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7520329
	CA*F4860*6D*+TXV	G*E81005C*B*	38,000	30,000	14.5	11.5	1,425	7517134
	CA*F4860*6D*+TXV	G*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7520331
	CA*F4860*6D*+TXV	G*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7517137
	CA*F4860*6D*+TXV	A*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7517130
	CA*F4860*6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	11.5	1,400	7517125

See Notes on Page 71.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0421K* (Contd.)	CA*F4860*6D*+TXV	A*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7517127
	CA*F4860*6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	11.5	1,275	7517135
	CA*F4860*6D*+TXV	G*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7517138
	CA*F4860*6D*+TXV	A*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7517131
	CA*F4860*6D*+TXV	A*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7520330
	CA*F4860*6D*+TXV	A*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7517129
	CA*F4860*6D*+TXV	G*E80805D*A*	38,000	30,000	14.5	11.5	1,425	7517133
	CA*F4860*6D*+TXV	A*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7517128
	CA*F4860*6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	11.5	1,275	7517124
	CA*F4860*6D*+TXV	A*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7517126
	CA*F4860*6D*+TXV	G*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7517142
	CA*F4860*6D*+TXV	G*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7517140
	CA*F4860*6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	11.5	1,400	7517136
	CA*F4860*6D*+TXV	G*E80805C*B*	38,000	30,000	14.5	11.5	1,425	7517132
	CA*F4860*6D*+TXV	G*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7520332
	CA*F4860*6D*+TXV	G*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7517139
	CA*F4860*6D*+TXV	G*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7517141
	CA*F4961*6D*	G*VC80805D*B*	39,000	31,800	14.5	12.2	1,350	9923422
	CA*F4961*6D*	G*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	7517208
	CA*F4961*6D*	G*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	7517207
	CA*F4961*6D*	G*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	7517202
	CA*F4961*6D*	A*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	7517196
	CA*F4961*6D*	G*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	7517206
	CA*F4961*6D*	A*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	7517190
	CA*F4961*6D*	A*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	7517197
	CA*F4961*6D*	G*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	7517205
	CA*F4961*6D*	A*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	7517198
	CA*F4961*6D*	G*E80805C*B*	39,000	30,800	14.5	12.2	1,425	7517199
	CA*F4961*6D*	G*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	7517210
	CA*F4961*6D*	A*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	7517191
	CA*F4961*6D*	A*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	7517189
	CA*F4961*6D*	G*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	7517204
	CA*F4961*6D*	A*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	7517193
	CA*F4961*6D*	G*E81005C*B*	39,000	30,800	14.5	12.2	1,425	7517201
	CA*F4961*6D*	G*E80805D*A*	39,000	30,800	14.5	12.2	1,425	7517200
	CA*F4961*6D*	A*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	7517194
	CA*F4961*6D*	G*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	7517211
	CA*F4961*6D*	G*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	7517209
	CA*F4961*6D*	A*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	7517192
	CA*F4961*6D*	G*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	7517203
	CA*F4961*6D*	A*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	7517195
	CA*F4961*6D*+EEP		39,000	30,800	14.0	12.2	1,400	7517162
	CA*F4961*6D*+EEP+TXV		39,000	30,800	14.0	12.2	1,400	7517163
	CA*F4961*6D*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	7517164
	CA*F4961*6D*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	7517165
	CA*F4961*6D*+TXV	G*VC80805D*B*	39,000	31,800	14.5	12.2	1,350	9923423
	CA*F4961*6D*+TXV	A*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	7517167
	CA*F4961*6D*+TXV	G*E80805D*A*	39,000	30,800	14.5	12.2	1,425	7517177
	CA*F4961*6D*+TXV	A*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	7517174
	CA*F4961*6D*+TXV	A*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	7517172
	CA*F4961*6D*+TXV	A*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	7517166
	CA*F4961*6D*+TXV	G*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	7517180
	CA*F4961*6D*+TXV	G*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	7517187
	CA*F4961*6D*+TXV	A*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	7517173
	CA*F4961*6D*+TXV	A*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	7517169
	CA*F4961*6D*+TXV	A*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	7517171
	CA*F4961*6D*+TXV	G*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	7517186
	CA*F4961*6D*+TXV	G*E80805C*B*	39,000	30,800	14.5	12.2	1,425	7517176
	CA*F4961*6D*+TXV	G*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	7517188

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0421K* (Contd.)	CA*F4961*6D*+TXV	G*E81005C*B*	39,000	30,800	14.5	12.2	1,425	7517178
	CA*F4961*6D*+TXV	G*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	7517184
	CA*F4961*6D*+TXV	G*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	7517183
	CA*F4961*6D*+TXV	G*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	7517179
	CA*F4961*6D*+TXV	G*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	7517181
	CA*F4961*6D*+TXV	A*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	7517168
	CA*F4961*6D*+TXV	G*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	7517185
	CA*F4961*6D*+TXV	G*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	7517182
	CA*F4961*6D*+TXV	A*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	7517170
	CA*F4961*6D*+TXV	A*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	7517175
	CAPT4961*4A*	G*VC80805D*B*	39,000	31,800	14.5	11.5	1,350	9923424
	CAPT4961*4A*	G*VC960804CNA*	39,000	30,800	14.5	11.5	1,385	7517227
	CAPT4961*4A*	G*E81005C*B*	39,000	30,800	14.5	11.5	1,425	7517224
	CAPT4961*4A*	A*VC80805C*B*	39,000	30,800	14.5	11.5	1,425	7517215
	CAPT4961*4A*	G*E80805C*B*	39,000	30,800	14.5	11.5	1,425	7517223
	CAPT4961*4A*	A*VC960804CNA*	39,000	30,800	14.5	11.5	1,385	7517217
	CAPT4961*4A*	A*VM971205DNA*	39,000	30,800	14.5	11.5	1,300	7517222
	CAPT4961*4A*	A*VC81005C*B*	39,000	30,800	14.5	11.5	1,370	7517216
	CAPT4961*4A*	A*VC961205DNA*	39,000	30,800	14.5	11.5	1,450	7517219
	CAPT4961*4A*	A*VC961005CNA*	39,000	30,800	14.5	11.5	1,300	7517218
	CAPT4961*4A*	G*VC961005CNA*	39,000	30,800	14.5	11.5	1,300	7517228
	CAPT4961*4A*	G*VC81005C*B*	39,000	30,800	14.5	11.5	1,370	7517226
	CAPT4961*4A*	G*VC80805C*B*	39,000	30,800	14.5	11.5	1,425	7517225
	CAPT4961*4A*	G*VM971005CNA*	39,000	30,800	14.5	11.5	1,300	7517231
	CAPT4961*4A*	A*VM970804CNA*	39,000	30,800	14.5	11.5	1,430	7517220
	CAPT4961*4A*	G*VM971205DNA*	39,000	30,800	14.5	11.5	1,300	7517232
	CAPT4961*4A*	G*VM970804CNA*	39,000	30,800	14.5	11.5	1,430	7517230
	CAPT4961*4A*	A*VM971005CNA*	39,000	30,800	14.5	11.5	1,300	7517221
	CAPT4961*4A*	G*VC961205DNA*	39,000	30,800	14.5	11.5	1,450	7517229
	CAPT4961*4A*+EHP		39,000	30,800	14.0	11.5	1,275	7517212
	CAPT4961*4A*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	7517213
	CAPT4961*4A*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	7517214
	CHPF4860D6D*	G*VC80805D*B*	38,000	31,000	14.5	12.2	1,350	9923425
	CHPF4860D6D*	G*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	7517267
	CHPF4860D6D*	A*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	7517260
	CHPF4860D6D*	G*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	7520345
	CHPF4860D6D*	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7517265
	CHPF4860D6D*	G*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	7517270
	CHPF4860D6D*	A*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	7517256
	CHPF4860D6D*	G*E81005C*B*	38,000	30,000	14.5	12.2	1,425	7517264
	CHPF4860D6D*	G*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	7517271
	CHPF4860D6D*	G*E80805C*B*	38,000	30,000	14.5	12.2	1,425	7517262
	CHPF4860D6D*	G*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	7517269
	CHPF4860D6D*	G*E80805D*A*	38,000	30,000	14.5	12.2	1,425	7517263
	CHPF4860D6D*	A*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	7520344
	CHPF4860D6D*	A*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	7517258
	CHPF4860D6D*	G*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	7517268
	CHPF4860D6D*	G*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	7520346
	CHPF4860D6D*	A*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	7517259
	CHPF4860D6D*	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7517255
	CHPF4860D6D*	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7517266
	CHPF4860D6D*	A*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	7517257
	CHPF4860D6D*	A*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	7517261
	CHPF4860D6D*	A*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	7520343
	CHPF4860D6D*	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7517254
	CHPF4860D6D*	G*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	7517272
	CHPF4860D6D*+EHP		38,000	30,000	14.0	12.0	1,425	7520337
	CHPF4860D6D*+EHP+TXV		38,000	30,000	14.0	12.2	1,425	7520338
	CHPF4860D6D*+MBVC1600**-1A*		38,000	30,000	14.5	12.2	1,400	7517233

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0421K* (Contd.)	CHPF4860D6D*+MBVC2000**-1A*		38,000	30,000	14.5	12.2	1,400	7517234
	CHPF4860D6D*+TXV	G*VC80805D*B*	38,000	31,000	14.5	12.2	1,350	9923426
	CHPF4860D6D*+TXV	G*E80805D*A*	38,000	30,000	14.5	12.2	1,425	7517244
	CHPF4860D6D*+TXV	A*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	7517242
	CHPF4860D6D*+TXV	A*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	7517238
	CHPF4860D6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7517247
	CHPF4860D6D*+TXV	G*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	7517252
	CHPF4860D6D*+TXV	G*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	7517251
	CHPF4860D6D*+TXV	G*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	7520342
	CHPF4860D6D*+TXV	G*E81005C*B*	38,000	30,000	14.5	12.2	1,425	7517245
	CHPF4860D6D*+TXV	G*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	7517248
	CHPF4860D6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7517246
	CHPF4860D6D*+TXV	G*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	7520341
	CHPF4860D6D*+TXV	G*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	7517253
	CHPF4860D6D*+TXV	G*E80805C*B*	38,000	30,000	14.5	12.2	1,425	7517243
	CHPF4860D6D*+TXV	G*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	7517249
	CHPF4860D6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7517235
	CHPF4860D6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7517236
	CHPF4860D6D*+TXV	G*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	7517250
	CHPF4860D6D*+TXV	A*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	7520340
	CHPF4860D6D*+TXV	A*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	7520339
	CHPF4860D6D*+TXV	A*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	7517239
	CHPF4860D6D*+TXV	A*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	7517237
	CHPF4860D6D*+TXV	A*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	7517240
	CHPF4860D6D*+TXV	A*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	7517241
	CSCF4860N6D*	G*VC80805D*B*	38,000	31,000	14.5	11.5	1,350	9923427
	CSCF4860N6D*	G*E80805D*A*	38,000	30,000	14.5	11.5	1,425	7517301
	CSCF4860N6D*	G*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7520356
	CSCF4860N6D*	G*E80805C*B*	38,000	30,000	14.5	11.5	1,425	7517300
	CSCF4860N6D*	A*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7517297
	CSCF4860N6D*	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7517293
	CSCF4860N6D*	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7517292
	CSCF4860N6D*	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7517303
	CSCF4860N6D*	A*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7517298
	CSCF4860N6D*	G*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7517307
	CSCF4860N6D*	G*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7517310
	CSCF4860N6D*	G*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7520355
	CSCF4860N6D*	A*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7517299
	CSCF4860N6D*	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7517304
	CSCF4860N6D*	A*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7517295
	CSCF4860N6D*	A*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7520354
	CSCF4860N6D*	G*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7517305
	CSCF4860N6D*	G*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7517309
	CSCF4860N6D*	A*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7517296
	CSCF4860N6D*	G*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7517308
	CSCF4860N6D*	A*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7520353
	CSCF4860N6D*	G*E81005C*B*	38,000	30,000	14.5	11.5	1,425	7517302
	CSCF4860N6D*	A*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7517294
	CSCF4860N6D*	G*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7517306
	CSCF4860N6D*+EEP		38,000	30,000	14.0	11.5	1,425	7520347
	CSCF4860N6D*+EEP+TXV		38,000	30,000	14.0	11.5	1,425	7520348
	CSCF4860N6D*+TXV	G*VC80805D*B*	38,000	31,000	14.5	11.5	1,350	9923428
	CSCF4860N6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7517273
	CSCF4860N6D*+TXV	A*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7517277
	CSCF4860N6D*+TXV	G*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7517286
	CSCF4860N6D*+TXV	G*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7517287
	CSCF4860N6D*+TXV	A*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7520349
	CSCF4860N6D*+TXV	G*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7520351
	CSCF4860N6D*+TXV	G*E80805D*A*	38,000	30,000	14.5	11.5	1,425	7517282

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0421K* (Contd.)	CSCF4860N6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7517285
	CSCF4860N6D*+TXV	A*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7517280
	CSCF4860N6D*+TXV	G*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7520352
	CSCF4860N6D*+TXV	G*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7517291
	CSCF4860N6D*+TXV	A*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7520350
	CSCF4860N6D*+TXV	A*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7517278
	CSCF4860N6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7517284
	CSCF4860N6D*+TXV	G*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7517290
	CSCF4860N6D*+TXV	G*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7517289
	CSCF4860N6D*+TXV	G*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7517288
	CSCF4860N6D*+TXV	G*E80805C*B*	38,000	30,000	14.5	11.5	1,425	7517281
	CSCF4860N6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7517274
	CSCF4860N6D*+TXV	A*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7517275
	CSCF4860N6D*+TXV	G*E81005C*B*	38,000	30,000	14.5	11.5	1,425	7517283
	CSCF4860N6D*+TXV	A*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7517279
	CSCF4860N6D*+TXV	A*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7517276
GSX14 0431K*	ASPT47D14A*		38,000	30,000	14.5	12.2	1,250	8242119
	ASPT49D14A*		39,000	30,800	14.5	12.2	1,425	8242071
	ASPT59C14A*		38,000	30,000	14.0	12.2	1,260	8242070
	AVPTC48D14A*		38,000	30,000	15.0	12.5	1,310	8082400
	AVPTC49C14A*		36,200	28,600	14.0	12.2	1,300	10206666
	AVPTC49D14A*		38,000	30,000	15.0	12.5	1,320	8996148
	CA*F4961*6D*	G*VC80805D*B*	39,000	31,800	14.5	12.2	1,350	9923429
	CA*F4961*6D*	G*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	8082438
	CA*F4961*6D*	A*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	8082504
	CA*F4961*6D*	G*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	8082492
	CA*F4961*6D*	A*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	8082458
	CA*F4961*6D*	A*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	8082454
	CA*F4961*6D*	G*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	8082442
	CA*F4961*6D*	G*E80805C*B*	39,000	30,800	14.5	12.2	1,425	8082410
	CA*F4961*6D*	G*E81005C*B*	39,000	30,800	14.5	12.2	1,425	8082418
	CA*F4961*6D*	G*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	8082446
	CA*F4961*6D*	A*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	8082434
	CA*F4961*6D*	A*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	8082430
	CA*F4961*6D*	G*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	8082422
	CA*F4961*6D*	G*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	8082466
	CA*F4961*6D*	A*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	8082478
	CA*F4961*6D*	G*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	8082462
	CA*F4961*6D*	G*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	8082426
	CA*F4961*6D*	G*E80805D*A*	39,000	30,800	14.5	12.2	1,425	8082414
	CA*F4961*6D*	G*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	8082470
	CA*F4961*6D*	G*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	8082486
	CA*F4961*6D*	A*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	8082450
	CA*F4961*6D*	A*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	8082482
	CA*F4961*6D*	A*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	8082498
	CA*F4961*6D*	A*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	8082474
	CA*F4961*6D*+EEP		39,000	30,800	14.0	12.2	1,400	8082401
	CA*F4961*6D*+EEP+TXV		39,000	30,800	14.0	12.2	1,400	8082402
	CA*F4961*6D*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	8082403
	CA*F4961*6D*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	8082404
	CA*F4961*6D*+TXV	G*VC80805D*B*	39,000	31,800	14.5	12.2	1,350	9923430
	CA*F4961*6D*+TXV	G*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	8082493
	CA*F4961*6D*+TXV	G*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	8082427
	CA*F4961*6D*+TXV	G*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	8082487
	CA*F4961*6D*+TXV	G*E80805C*B*	39,000	30,800	14.5	12.2	1,425	8082411
	CA*F4961*6D*+TXV	A*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	8082451
	CA*F4961*6D*+TXV	A*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	8082479
	CA*F4961*6D*+TXV	G*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	8082439
	CA*F4961*6D*+TXV	A*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	8082505

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0431K* (Contd.)	CA*F4961*6D*+TXV	G*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	8082463
	CA*F4961*6D*+TXV	G*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	8082471
	CA*F4961*6D*+TXV	A*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	8082455
	CA*F4961*6D*+TXV	A*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	8082475
	CA*F4961*6D*+TXV	G*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	8082447
	CA*F4961*6D*+TXV	A*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	8082431
	CA*F4961*6D*+TXV	G*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	8082467
	CA*F4961*6D*+TXV	A*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	8082459
	CA*F4961*6D*+TXV	A*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	8082499
	CA*F4961*6D*+TXV	G*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	8082443
	CA*F4961*6D*+TXV	G*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	8082423
	CA*F4961*6D*+TXV	A*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	8082483
	CA*F4961*6D*+TXV	A*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	8082435
	CA*F4961*6D*+TXV	G*E80805D*A*	39,000	30,800	14.5	12.2	1,425	8082415
	CA*F4961*6D*+TXV	G*E81005C*B*	39,000	30,800	14.5	12.2	1,425	8082419
	CAPT4961*4A*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	8082405
	CAPT4961*4A*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	8082406
	CHPF4860D6D*	G*VC80805D*B*	38,000	31,000	14.5	12.2	1,350	9923431
	CHPF4860D6D*	G*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	8082424
	CHPF4860D6D*	A*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	8082456
	CHPF4860D6D*	A*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	8082432
	CHPF4860D6D*	G*E80805D*A*	38,000	30,000	14.5	12.2	1,425	8082416
	CHPF4860D6D*	A*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	8082452
	CHPF4860D6D*	G*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	8082448
	CHPF4860D6D*	A*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	8082476
	CHPF4860D6D*	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8082488
	CHPF4860D6D*	A*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	8082484
	CHPF4860D6D*	G*E81005C*B*	38,000	30,000	14.5	12.2	1,425	8082420
	CHPF4860D6D*	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8082506
	CHPF4860D6D*	G*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	8082428
	CHPF4860D6D*	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8082494
	CHPF4860D6D*	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8082500
	CHPF4860D6D*	G*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	8082468
	CHPF4860D6D*	G*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	8082472
	CHPF4860D6D*	G*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	8082440
	CHPF4860D6D*	A*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	8082480
	CHPF4860D6D*	A*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	8082436
	CHPF4860D6D*	G*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	8082464
	CHPF4860D6D*	G*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	8082444
	CHPF4860D6D*	A*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	8082460
	CHPF4860D6D*	G*E80805C*B*	38,000	30,000	14.5	12.2	1,425	8082412
	CHPF4860D6D*+EEP+TXV		38,000	30,000	14.0	12.2	1,425	8082407
	CHPF4860D6D*+MBVC1600**-1A*		38,000	30,000	14.5	12.2	1,400	8082408
	CHPF4860D6D*+MBVC2000**-1A*		38,000	30,000	14.5	12.2	1,400	8082409
	CHPF4860D6D*+TXV	G*VC80805D*B*	38,000	31,000	14.5	12.2	1,350	9923432
	CHPF4860D6D*+TXV	A*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	8082477
	CHPF4860D6D*+TXV	G*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	8082469
	CHPF4860D6D*+TXV	G*E80805D*A*	38,000	30,000	14.5	12.2	1,425	8082417
	CHPF4860D6D*+TXV	A*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	8082453
	CHPF4860D6D*+TXV	A*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	8082485
	CHPF4860D6D*+TXV	A*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	8082437
	CHPF4860D6D*+TXV	G*E81005C*B*	38,000	30,000	14.5	12.2	1,425	8082421
	CHPF4860D6D*+TXV	G*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	8082465
	CHPF4860D6D*+TXV	G*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	8082429
	CHPF4860D6D*+TXV	G*E80805C*B*	38,000	30,000	14.5	12.2	1,425	8082413
	CHPF4860D6D*+TXV	A*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	8082481
	CHPF4860D6D*+TXV	A*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	8082433
	CHPF4860D6D*+TXV	A*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	8082461
	CHPF4860D6D*+TXV	G*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	8082445

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0431K* (Contd.)	CHPF4860D6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8082501
	CHPF4860D6D*+TXV	G*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	8082473
	CHPF4860D6D*+TXV	G*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	8082449
	CHPF4860D6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8082495
	CHPF4860D6D*+TXV	A*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	8082457
	CHPF4860D6D*+TXV	G*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	8082425
	CHPF4860D6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8082489
	CHPF4860D6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8082507
	CHPF4860D6D*+TXV	G*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	8082441
	CSCF4860N6D*	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8082502
	CSCF4860N6D*	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8082490
	CSCF4860N6D*	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8082508
	CSCF4860N6D*	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8082496
	CSCF4860N6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8082503
	CSCF4860N6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8082509
	CSCF4860N6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8082497
	CSCF4860N6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8082491
GSX14 0481K*	ARUF61D14A*		45,500	32,200	14.0	11.7	1,520	7984200
	ASPT49C14A*		45,000	31,800	14.0	12.0	1,395	10206642
	ASPT59C14A*		45,500	32,200	14.0	12.0	1,430	8242072
	ASPT61D14A*		47,000	33,200	14.5	12.2	1,630	8242073
	AVPTC48D14A*		46,000	32,600	14.5	11.7	1,550	7517313
	AVPTC49C14A*		45,000	31,800	14.0	11.7	1,420	10206667
	AVPTC59C14A*		45,500	32,200	14.0	12.0	1,485	8996149
	AVPTC60D14A*		46,000	32,600	14.5	11.7	1,590	7517314
	AVPTC61D14A*		46,500	32,800	14.5	12.2	1,455	8996150
	CA*F4860*6D*	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517343
	CA*F4860*6D*	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517351
	CA*F4860*6D*	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517348
	CA*F4860*6D*	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517350
	CA*F4860*6D*	G*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7517346
	CA*F4860*6D*	A*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7517340
	CA*F4860*6D*	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517341
	CA*F4860*6D*	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517344
	CA*F4860*6D*	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517345
	CA*F4860*6D*	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517347
	CA*F4860*6D*	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517349
	CA*F4860*6D*	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517342
	CA*F4860*6D*+EEP		45,500	32,200	14.0	11.7	1,550	7517315
	CA*F4860*6D*+EEP+TXV		45,500	32,200	14.0	11.7	1,550	7517316
	CA*F4860*6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7517317
	CA*F4860*6D*+TXV	G*VC80805D*B*	45,500	35,000	14.5	11.7	1,500	9923433
	CA*F4860*6D*+TXV	A*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7517318
	CA*F4860*6D*+TXV	A*VC961205DNA*	45,500	32,200	14.5	12.0	1,450	7517324
	CA*F4860*6D*+TXV	A*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7517322
	CA*F4860*6D*+TXV	A*VC961005CNA*	45,500	32,200	14.5	12.0	1,450	7517323
	CA*F4860*6D*+TXV	G*VC961205DNA*	45,500	32,200	14.5	12.0	1,450	7517336
	CA*F4860*6D*+TXV	G*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7517334
	CA*F4860*6D*+TXV	A*VM971005CNA*	45,500	32,200	14.5	12.0	1,450	7517326
	CA*F4860*6D*+TXV	A*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7517319
	CA*F4860*6D*+TXV	G*VM970804CNA*	45,000	31,800	14.5	12.0	1,385	7517337
	CA*F4860*6D*+TXV	A*VM971205DNA*	45,500	32,200	14.5	12.0	1,450	7517327
	CA*F4860*6D*+TXV	G*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7517332
	CA*F4860*6D*+TXV	A*VM970804CNA*	45,000	31,800	14.5	12.0	1,385	7517325
	CA*F4860*6D*+TXV	G*E81005C*B*	45,500	32,200	14.5	11.7	1,570	7517329
	CA*F4860*6D*+TXV	A*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7517321
	CA*F4860*6D*+TXV	G*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7517333
	CA*F4860*6D*+TXV	G*VM971005CNA*	45,500	32,200	14.5	12.0	1,450	7517338
	CA*F4860*6D*+TXV	G*E80805C*B*	45,000	31,800	14.5	11.7	1,480	7517328

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0481K* (Contd.)	CA*F4860*6D*+TXV	A*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7517320
	CA*F4860*6D*+TXV	G*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7517330
	CA*F4860*6D*+TXV	G*VC961005CNA*	45,500	32,200	14.5	12.0	1,450	7517335
	CA*F4860*6D*+TXV	G*VM971205DNA*	45,500	32,200	14.5	12.0	1,450	7517339
	CA*F4860*6D*+TXV	G*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7517331
	CA*F4961*6D*+EEP		46,000	32,600	14.0	11.7	1,550	7517352
	CA*F4961*6D*+EEP+TXV		46,000	32,600	14.0	11.7	1,550	7517353
	CA*F4961*6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7517354
	CAPT4961*4A*	G*VC80805D*B*	45,500	35,000	14.5	11.7	1,500	9923434
	CAPT4961*4A*	A*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7517360
	CAPT4961*4A*	G*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7517371
	CAPT4961*4A*	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517376
	CAPT4961*4A*	A*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7517358
	CAPT4961*4A*	A*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7517356
	CAPT4961*4A*	A*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7517359
	CAPT4961*4A*	G*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7517369
	CAPT4961*4A*	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517374
	CAPT4961*4A*	A*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7517357
	CAPT4961*4A*	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517373
	CAPT4961*4A*	G*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7517370
	CAPT4961*4A*	G*E80805C*B*	45,000	31,800	14.5	11.7	1,480	7517366
	CAPT4961*4A*	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517361
	CAPT4961*4A*	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517364
	CAPT4961*4A*	G*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7517368
	CAPT4961*4A*	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517362
	CAPT4961*4A*	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517365
	CAPT4961*4A*	G*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7517372
	CAPT4961*4A*	G*E81005C*B*	45,500	32,200	14.5	11.7	1,570	7517367
	CAPT4961*4A*	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517377
	CAPT4961*4A*	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517363
	CAPT4961*4A*	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517375
	CAPT4961*4A*+EEP		46,000	32,600	14.0	11.7	1,550	7517355
	CAPT4961*4A*+MBVC2000**-1A*		45,000	31,800	14.5	11.7	1,595	7517378
	CHPF4860D6D*	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517415
	CHPF4860D6D*	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517405
	CHPF4860D6D*	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517409
	CHPF4860D6D*	G*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7517410
	CHPF4860D6D*	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517412
	CHPF4860D6D*	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517406
	CHPF4860D6D*	A*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7517404
	CHPF4860D6D*	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517408
	CHPF4860D6D*	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517413
	CHPF4860D6D*	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517411
	CHPF4860D6D*	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517407
	CHPF4860D6D*	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517414
	CHPF4860D6D*+EEP		46,000	32,600	14.0	11.7	1,550	7517379
	CHPF4860D6D*+EEP+TXV		46,000	32,600	14.0	11.7	1,550	7517380
	CHPF4860D6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7517381
	CHPF4860D6D*+TXV	G*VC80805D*B*	45,500	35,000	14.5	11.7	1,500	9923435
	CHPF4860D6D*+TXV	G*E80805C*B*	45,000	31,800	14.5	11.7	1,480	7517392
	CHPF4860D6D*+TXV	G*VC961205DNA*	45,500	32,200	14.5	12.0	1,450	7517400
	CHPF4860D6D*+TXV	G*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7517395
	CHPF4860D6D*+TXV	A*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7517386
	CHPF4860D6D*+TXV	G*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7517397
	CHPF4860D6D*+TXV	A*VM970804CNA*	45,000	31,800	14.5	12.0	1,385	7517389
	CHPF4860D6D*+TXV	G*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7517398
	CHPF4860D6D*+TXV	G*VM971205DNA*	45,500	32,200	14.5	12.0	1,450	7517403
	CHPF4860D6D*+TXV	A*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7517382
	CHPF4860D6D*+TXV	A*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7517385

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0481K* (Contd.)	CHPF4860D6D*+TXV	A*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7517383
	CHPF4860D6D*+TXV	G*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7517394
	CHPF4860D6D*+TXV	G*VC961005CNA*	45,500	32,200	14.5	12.0	1,450	7517399
	CHPF4860D6D*+TXV	G*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7517396
	CHPF4860D6D*+TXV	A*VC961005CNA*	45,500	32,200	14.5	12.0	1,450	7517387
	CHPF4860D6D*+TXV	G*VM970804CNA*	45,000	31,800	14.5	12.0	1,385	7517401
	CHPF4860D6D*+TXV	A*VM971205DNA*	45,500	32,200	14.5	12.0	1,450	7517391
	CHPF4860D6D*+TXV	G*VM971005CNA*	45,500	32,200	14.5	12.0	1,450	7517402
	CHPF4860D6D*+TXV	A*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7517384
	CHPF4860D6D*+TXV	A*VC961205DNA*	45,500	32,200	14.5	12.0	1,450	7517388
	CHPF4860D6D*+TXV	G*E81005C*B*	45,500	32,200	14.5	11.7	1,570	7517393
	CHPF4860D6D*+TXV	A*VM971005CNA*	45,500	32,200	14.5	12.0	1,450	7517390
	CSCF4860N6D*	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517437
	CSCF4860N6D*	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517441
	CSCF4860N6D*	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517438
	CSCF4860N6D*	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517444
	CSCF4860N6D*	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517443
	CSCF4860N6D*	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517440
	CSCF4860N6D*	G*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7517442
	CSCF4860N6D*	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517447
	CSCF4860N6D*	A*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7517436
	CSCF4860N6D*	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517439
	CSCF4860N6D*	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517445
	CSCF4860N6D*	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517446
	CSCF4860N6D*+EEP		45,500	32,200	14.0	11.7	1,550	7517416
	CSCF4860N6D*+EEP+TXV		45,500	32,200	14.0	11.7	1,550	7517417
	CSCF4860N6D*+TXV	G*VC80805D*B*	45,500	35,000	14.5	11.7	1,500	9923436
	CSCF4860N6D*+TXV	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517425
	CSCF4860N6D*+TXV	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517432
	CSCF4860N6D*+TXV	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517433
	CSCF4860N6D*+TXV	A*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7517420
	CSCF4860N6D*+TXV	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7517435
	CSCF4860N6D*+TXV	G*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7517429
	CSCF4860N6D*+TXV	G*E81005C*B*	45,000	31,800	14.5	11.7	1,570	7517427
	CSCF4860N6D*+TXV	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517424
	CSCF4860N6D*+TXV	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7517434
	CSCF4860N6D*+TXV	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7517423
	CSCF4860N6D*+TXV	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517431
	CSCF4860N6D*+TXV	G*E80805C*B*	45,000	31,800	14.5	11.7	1,480	7517426
	CSCF4860N6D*+TXV	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7517421
	CSCF4860N6D*+TXV	G*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7517430
	CSCF4860N6D*+TXV	A*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7517418
	CSCF4860N6D*+TXV	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7517422
	CSCF4860N6D*+TXV	A*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7517419
	CSCF4860N6D*+TXV	G*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7517428
GSX14 0601K*	ASPT61D14A*		57,000	40,000	14.0	11.7	1,645	7984220
	AVPTC60D14A*		57,000	40,000	14.0	11.7	1,620	7517449
	AVPTC61D14A*		57,000	40,000	14.5	12.0	1,775	8996151
	CA*F4961*6D*	G*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7517471
	CA*F4961*6D*	A*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7517470
	CA*F4961*6D*	A*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7517469
	CA*F4961*6D*	G*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7517472
	CA*F4961*6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7517450
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7517451
	CA*F4961*6D*+TXV	G*VC80805D*B*	57,000	41,500	14.5	11.7	1,650	9923437
	CA*F4961*6D*+TXV	G*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7517467
	CA*F4961*6D*+TXV	A*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7517457
	CA*F4961*6D*+TXV	A*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7517458
	CA*F4961*6D*+TXV	A*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7517455

See Notes on Page 71.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0601K* (Contd.)	CA*F4961*6D*+TXV	G*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7517462
	CA*F4961*6D*+TXV	A*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7517452
	CA*F4961*6D*+TXV	G*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7517464
	CA*F4961*6D*+TXV	A*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7517453
	CA*F4961*6D*+TXV	G*E80805C*B*	57,000	40,000	14.5	11.7	1,525	7517459
	CA*F4961*6D*+TXV	G*E80805D*A*	57,000	40,000	14.5	12.0	1,500	7517460
	CA*F4961*6D*+TXV	G*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7517468
	CA*F4961*6D*+TXV	A*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7517456
	CA*F4961*6D*+TXV	G*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7517463
	CA*F4961*6D*+TXV	G*E81005C*B*	57,000	40,000	14.5	11.7	1,600	7517461
	CA*F4961*6D*+TXV	G*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7517465
	CA*F4961*6D*+TXV	G*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7517466
	CA*F4961*6D*+TXV	A*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7517454
	CAPT4961*4A*	G*VC80805D*B*	57,000	41,500	14.0	11.7	1,650	9923438
	CAPT4961*4A*	G*VC80805C*B*	57,000	40,000	14.0	11.7	1,560	7517479
	CAPT4961*4A*	G*E80805C*B*	57,000	40,000	14.0	11.7	1,525	7517476
	CAPT4961*4A*	G*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7517487
	CAPT4961*4A*	A*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7517484
	CAPT4961*4A*	G*E80805D*A*	57,000	40,000	14.0	12.0	1,500	7517477
	CAPT4961*4A*	G*VC81005C*B*	57,000	40,000	14.0	11.7	1,525	7517480
	CAPT4961*4A*	G*E81005C*B*	57,000	40,000	14.0	11.7	1,600	7517478
	CAPT4961*4A*	G*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7517490
	CAPT4961*4A*	A*VC80805C*B*	57,000	40,000	14.0	11.7	1,560	7517474
	CAPT4961*4A*	A*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7517483
	CAPT4961*4A*	A*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7517482
	CAPT4961*4A*	A*VC81005C*B*	57,000	40,000	14.0	11.7	1,525	7517475
	CAPT4961*4A*	G*EC961205DNA*	56,500	40,000	14.0	11.7	1,525	7517486
	CAPT4961*4A*	A*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7517485
	CAPT4961*4A*	A*EC961205DNA*	56,500	40,000	14.0	11.7	1,525	7517481
	CAPT4961*4A*	G*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7517488
	CAPT4961*4A*	G*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7517489
	CAPT4961*4A*+EEP		57,000	40,000	14.0	11.7	1,545	7517473
	CHPF4860D6D*	G*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7517513
	CHPF4860D6D*	G*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7517512
	CHPF4860D6D*	A*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7517510
	CHPF4860D6D*	A*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7517511
	CHPF4860D6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7517491
	CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7517492
	CHPF4860D6D*+TXV	G*VC80805D*B*	57,000	41,500	14.5	11.7	1,650	9923439
	CHPF4860D6D*+TXV	A*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7517493
	CHPF4860D6D*+TXV	G*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7517508
	CHPF4860D6D*+TXV	G*E80805C*B*	57,000	40,000	14.5	11.7	1,525	7517500
	CHPF4860D6D*+TXV	G*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7517503
	CHPF4860D6D*+TXV	A*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7517498
	CHPF4860D6D*+TXV	A*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7517496
	CHPF4860D6D*+TXV	A*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7517495
	CHPF4860D6D*+TXV	G*E81005C*B*	57,000	40,000	14.5	11.7	1,600	7517502
	CHPF4860D6D*+TXV	A*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7517494
	CHPF4860D6D*+TXV	G*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7517506
	CHPF4860D6D*+TXV	G*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7517504
	CHPF4860D6D*+TXV	G*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7517507
	CHPF4860D6D*+TXV	G*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7517505
	CHPF4860D6D*+TXV	A*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7517497
	CHPF4860D6D*+TXV	G*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7517509
	CHPF4860D6D*+TXV	A*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7517499
	CHPF4860D6D*+TXV	G*E80805D*A*	57,000	40,000	14.5	12.0	1,500	7517501
	CSCF4860N6D*	G*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7517536
	CSCF4860N6D*	G*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7517535
	CSCF4860N6D*	A*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7517533

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
GSX14 0601K* (Contd.)	CSCF4860N6D*	A*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7517534
	CSCF4860N6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7517514
	CSCF4860N6D*+MBVC2000**-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7517515
	CSCF4860N6D*+TXV	G*VC80805D*B*	57,000	41,500	14.5	11.7	1,650	9923440
	CSCF4860N6D*+TXV	G*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7517526
	CSCF4860N6D*+TXV	A*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7517518
	CSCF4860N6D*+TXV	G*E80805D*A*	57,000	40,000	14.5	12.0	1,500	7517524
	CSCF4860N6D*+TXV	A*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7517516
	CSCF4860N6D*+TXV	G*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7517528
	CSCF4860N6D*+TXV	G*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7517531
	CSCF4860N6D*+TXV	G*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7517532
	CSCF4860N6D*+TXV	A*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7517521
	CSCF4860N6D*+TXV	A*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7517520
	CSCF4860N6D*+TXV	G*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7517530
	CSCF4860N6D*+TXV	G*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7517529
	CSCF4860N6D*+TXV	A*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7517522
	CSCF4860N6D*+TXV	G*E81005C*B*	57,000	40,000	14.5	11.7	1,600	7517525
	CSCF4860N6D*+TXV	G*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7517527
	CSCF4860N6D*+TXV	G*E80805C*B*	57,000	40,000	14.5	11.7	1,525	7517523
	CSCF4860N6D*+TXV	A*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7517517
	CSCF4860N6D*+TXV	A*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7517519


¹ BTU/h

² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S.
The Goodman brand gas furnace contains the EEP cooling time delay.
- HSK - Hard Start Kit: This is an additional capacitor to assist with compressor start-up, used with the standard "run" capacitor that is supplied in the unit.
Order from a Goodman brand distributor or service department.

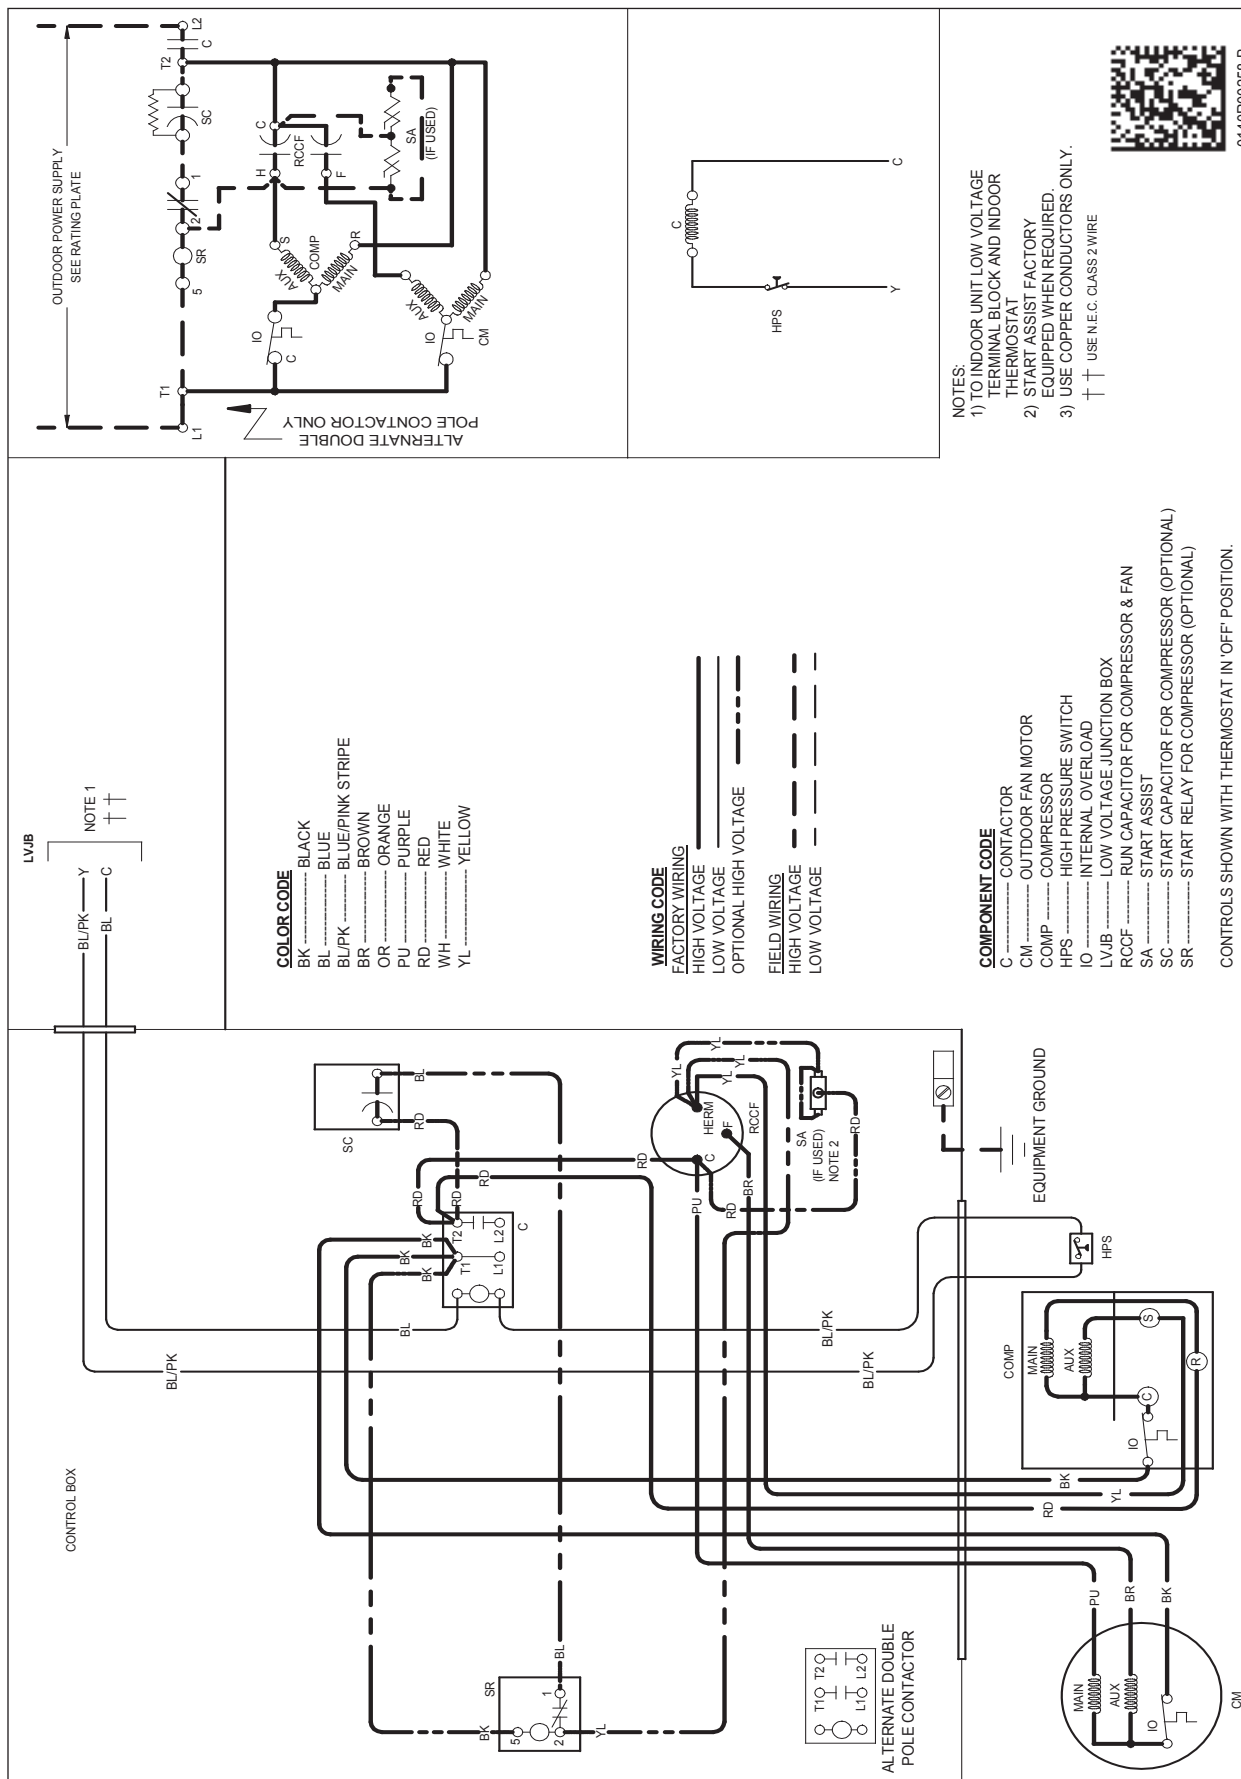

WARNING


⚡

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

- NOTES:**
- 1) TO INDOOR UNIT LOW VOLTAGE TERMINAL BLOCK AND INDOOR THERMOSTAT
 - 2) START ASSIST FACTORY EQUIPPED WHEN REQUIRED.
 - 3) USE COPPER CONDUCTORS ONLY.
- ++ USE N.E.C. CLASS 2 WIRE



0140R00258-B

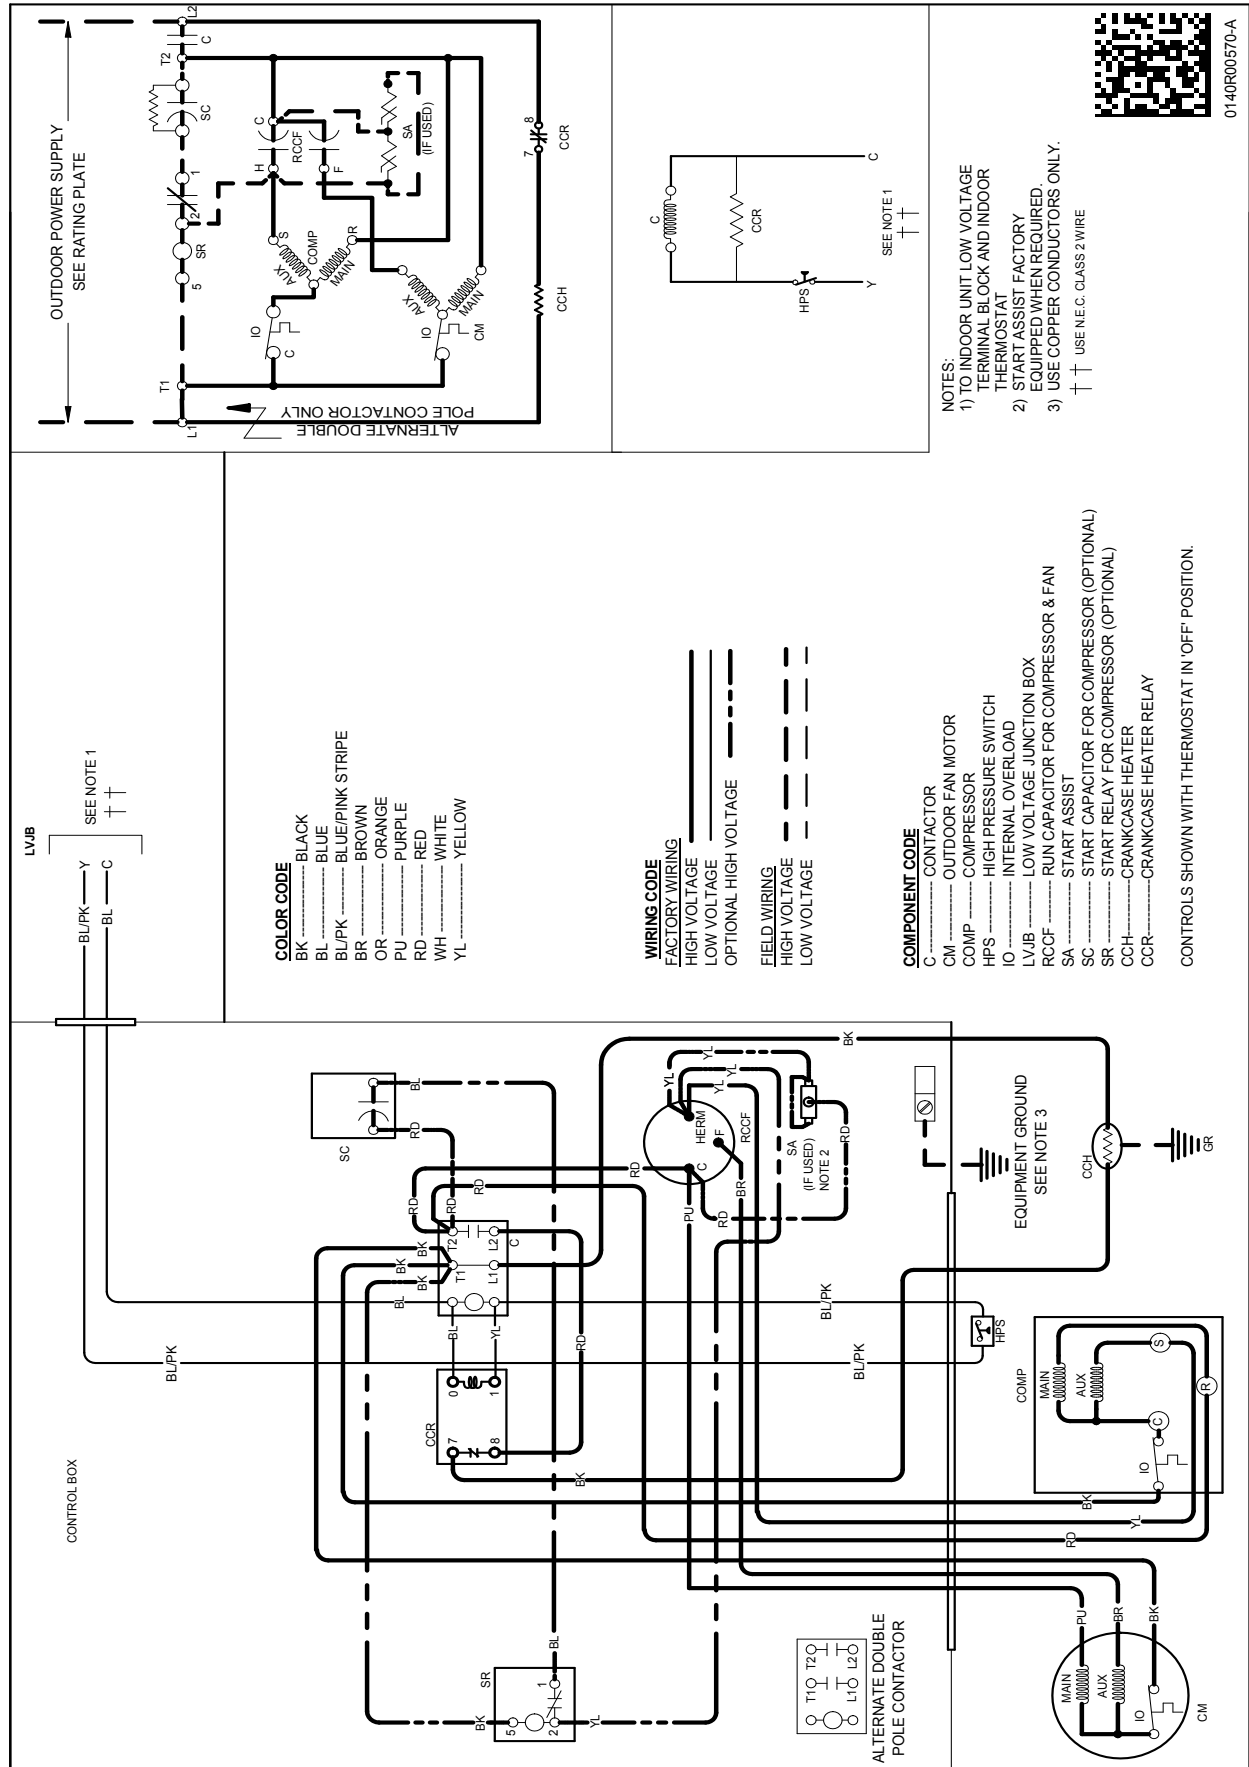

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



0140R0015P-C

[illegible]

DIMENSIONS

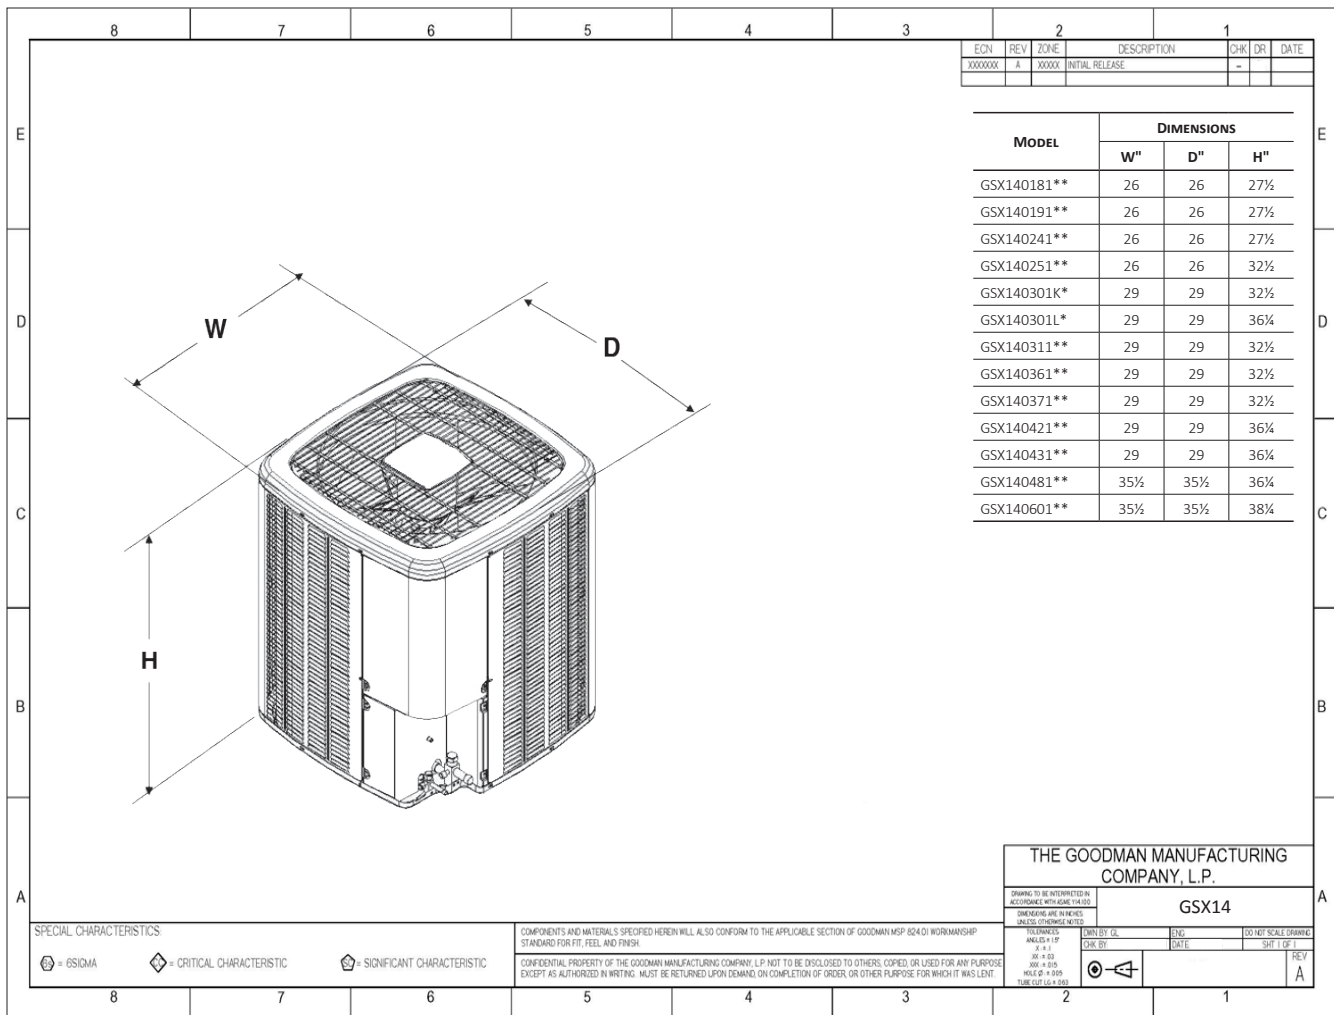

ACCESSORIES

MODEL #	DESCRIPTION	GSX14 018/19**	GSX14 024/25**	GSX14 030/31**	GSX14 036/37**	GSX14 042/43**	GSX14 048**	GSX14 060**
ABK-20	Anchor Bracket Kit ^			X	X	X	X	X
ABK-21	Anchor Bracket Kit ^	X	X					
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit					X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
LSK02A ²	Liquid Line Solenoid Kit	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X
0130R00000S	Low-Pressure Switch Kit	X	X	X	X	X	X	X
TX2N4 ²	TXV Kit	X						
TX2N4A ²	TXV Kit	X	X					
TX3N4 ²	TXV Kit			X	X			
TX5N4 ²	TXV Kit					X	X	X

^ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with rotary compressors require start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device.