

UP TO  
**13 SEER**

## Thru-the-Wall Condensing Units

**NATIONAL  
COMFORT  
PRODUCTS®**

HEATING & A/C EQUIPMENT

### Thru-the-Wall Cooling for Multi-Family Construction




## Condensing Units

### NCPE Series

NCPE 1000

NCPE 3000

NCPE 4000

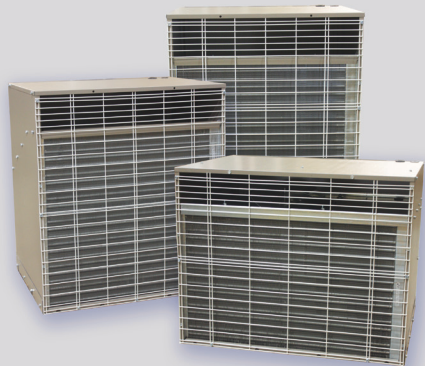

**Meets DOE Requirements  
For All Units**



#### Features

- Units are compatible with NCP Air Handlers or certain other air handlers with ECM motors\*
- Available in 1.5 to 2.5 Ton Sizes
- Heavy-Duty, Water Resistant Cabinet
- R-410A High Efficiency Compressor
- Easy Access Control Box
- Easy Access to Condenser Fan
- Long-Life Fan Motor
- High Efficiency Condenser Coil
- Brass Service Valves

#### Why Thru-The-Wall?

- Easily Serviced in Any Weather
- Less Expensive Installations
- Ground Clutter Eliminated
- No Theft or Vandalism
- Less Refrigerant Charge
- No Roof Penetration
- Short Copper Tube Runs
- Separate Meter Savings
- Better Appearance

\*Please consult the DOE CCMS data base [here](#) for a list of rated combinations of indoor and outdoor units. Combinations of outdoor and indoor units that are not rated will require factory testing and listing with DOE. Please consult the factory.

# CONDENSING UNITS NCPE 1000, NCPE 3000, NCPE 4000


**NCPE 1000**



**NCPE 3000**



**NCPE 4000**

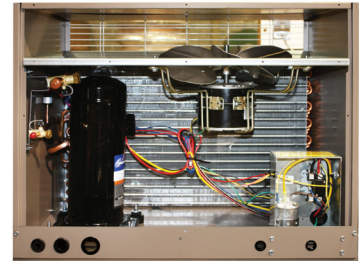

	Series 1000			Series 3000			Series 4000		
MODEL NO.	NCPE-418-1010	NCPE-424-1010	NCPE-430-1010	NCPE-418-3010	NCPE-424-3010	NCPE-430-3010	NCPE-418-4010	NCPE-424-4010	NCPE-430-4010
<b>DIMENSIONS</b>									
Width	26 1/4"	26 1/2"	26 1/2"	24 1/8"	24 1/8"	24 1/8"	30"	30"	30"
Height	28 5/8"	28 5/8"	28 5/8"	32"	32"	32"	23"	23"	23"
Length	18 1/2"	18 1/2"	18 1/2"	18 1/2"	18 1/2"	18 1/2"	22 1/2"	22 1/2"	22 1/2"
Liquid Valve	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Vapor Valve	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
<b>NOMINAL CAPACITY B/HR</b>	18,000	23,000	27,200	18,000	23,000	27,200	18,000	23,000	27,200
<b>ELECTRICAL</b>									
Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
Hertz	60	60	60	60	60	60	60	60	60
Phase	1	1	1	1	1	1	1	1	1
Min. AWG Wire	12	10	10	12	10	10	12	10	10
Min. Cir. Ampacity	13	15.3	17.75	13	15.3	17.75	13	15.3	17.75
Max. Fuse	20	25	30	20	25	30	20	25	30
<b>COMPRESSOR</b>									
RLA (Amps)	9.0	10.9	12.8	9.0	10.9	12.8	9.0	10.9	12.8
LRA (Amps)	56.3	62.9	67.8	56.3	62.9	67.8	56.3	62.9	67.8
<b>FAN MOTOR</b>									
HP	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
RPM	1500	1500	1500	1500	1500	1500	1500	1500	1500
Amps (Full Load)	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
<b>COIL</b>									
Face Area	3.61	3.61	3.61	3.77	3.77	3.77	3.14	3.14	3.14
FPI	16	16	16	16	16	16	16	16	16
<b>ARI RATING INDOOR UNITS</b>	<b>NCPAH-24-A1</b>	<b>NCPAH-24-A1</b>	<b>NCPAH-36-A1</b>	<b>NCPAH-24-A1</b>	<b>NCPAH-24-A1</b>	<b>NCPAH-36-A1</b>	<b>NCPAH-24-A1</b>	<b>NCPAH-24-A1</b>	<b>NCPAH-36-A1</b>
	18,000	23,000	27,200	18,000	23,000	27,200	18,000	23,000	27,200
	580 CFM	830 CFM	950 CFM	580 CFM	830 CFM	950 CFM	580 CFM	830 CFM	950 CFM
	12 SEER	12 SEER	12 SEER	12 SEER	12 SEER	12 SEER	12 SEER	12 SEER	12 SEER
	<b>NCPAH-24-P1</b>	<b>NCPAH-24-P1</b>	<b>NCPAH-36-P1</b>	<b>NCPAH-24-P1</b>	<b>NCPAH-24-P1</b>	<b>NCPAH-36-P1</b>	<b>NCPAH-24-P1</b>	<b>NCPAH-24-P1</b>	<b>NCPAH-36-P1</b>
	18,000	23,000	27,200	18,000	23,000	27,200	18,000	23,000	27,200
	600 CFM	850 CFM	1000 CFM	600 CFM	850 CFM	1000 CFM	600 CFM	850 CFM	1000 CFM
	13 SEER	12.50 SEER	12.50 SEER	13 SEER	13 SEER	12 SEER	13 SEER	12.50 SEER	12 SEER
	<b>NCPAH-24-M1</b>	<b>NCPAH-24-M1</b>	<b>NCPAH-36-M1</b>	<b>NCPAH-24-M1</b>	<b>NCPAH-24-M1</b>	<b>NCPAH-36-M1</b>	<b>NCPAH-24-M1</b>	<b>NCPAH-24-M1</b>	<b>NCPAH-36-M1</b>
	18,000	23,000	27,200	18,000	23,000	27,200	18,000	23,000	27,200
	650 CFM	815 CFM	950 CFM	650 CFM	815 CFM	950 CFM	650 CFM	815 CFM	950 CFM
	13 SEER	12.50 SEER	12 SEER	13 SEER	13 SEER	12 SEER	13 SEER	12.50 SEER	12 SEER
<b>REPLACES</b>	Bryant, Carrier, Day & Night, Dunham-Bush, Lennox, Magic Chef, Meyer, Payne, First Co., U.S. A/C (BB)			Carrier, Fedders, Dunham-Bush, Lennox, Magic Chef, Meyer, Rheem, First Co., U.S. A/C (AB)			Dunham-Bush, Hydro-Therm Space Pack, Lennox, Luxaire York, First Co., U.S. A/C (CB)		

\*Please consult the DOE CCMS data base [here](#) for a list of rated combinations of indoor and outdoor units. Combinations of outdoor and indoor units that are not rated will require factory testing and listing with DOE. Please consult the factory.

\*\*Dimensions including screw heads on both sides of the cabinet.

All specifications are subject to change without notice.