

EZ TRAP[®]

U.S. Patent Numbers 5,069,042 5,522,229

Model No.

83226

(EZT226)

Kit Contents

- Float Switch Assembly (1)
- 1" x 3/4" Slip Female Street Ell (1)
- 3/4" Adaptor (1)
- 72" Modular Cable (1)
- Red/Blue Service Label (1)


Scan for more info



Compact Overflow Switch with 3/4" Female Slip Inlet

New!

Compact Modular
Switch Assembly ▼



2 Year

LIMITED WARRANTY. RectorSeal[®] warrants to the original consumer purchaser ("Purchaser") of its product, EZ Trap[®], that it is free from defects in material or workmanship. If within two years (24 months) from the date of the original consumer purchase this product shall prove to be defective, it shall be repaired or replaced at RectorSeal's option. Your original receipt of purchase is required to determine warranty eligibility.

RectorSeal[®] 2601 Spenwick Drive - Houston, TX 77055
ph: 713.263.8001 - 800.231.3345 fax: 713.263.7577 - 800.441.0051
www.rectorseal.com - Like Us on Facebook




Installation Instructions

Model No.

83226

(EZ7226)

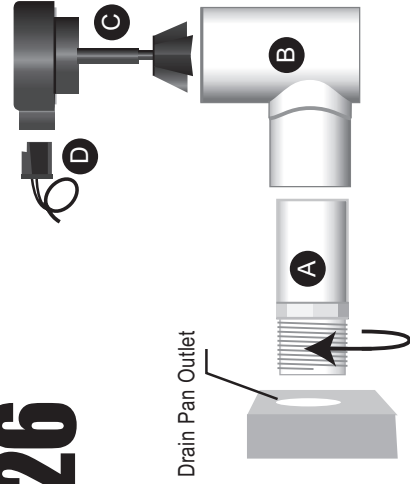


Important:

Install in strict accordance with RectorSeal® instructions as well as all applicable local plumbing, drainage and electrical codes.

Wiring Instructions

1. Turn off power at main panel before opening unit and working on electrical system.
2. An inline fuse is necessary to protect the 24V circuit.
3. Connect Float Switch using wiring diagram. (below)
4. Test system for proper operation by lifting float.

Note: Wiring diagram shown cuts power to thermostat when float switch operates to stop operation of the A/C unit. To inhibit mold growth during long absences, connect terminals into yellow cooling circuit so when float switch operates, condenser will switch off but fan will continue running.



Switch Assembly Instructions

1. Screw Adaptor (A) into 3/4" drain pan overflow outlet.
2. Glue Street Elbow (B) to Adaptor (A). Assembly must be plumb.
3. Press fit Float Switch Assembly (C) into 1" opening at top of Street Elbow (B). DO NOT USE GLUE.
Check that Actuator Arm and Float moves freely inside Elbow.
4. Press plug end of Modular Cable (D) into Float Switch Assembly (C).
5. Attach service & cleaning labels as indicated.