

5


4

3



2

1

C

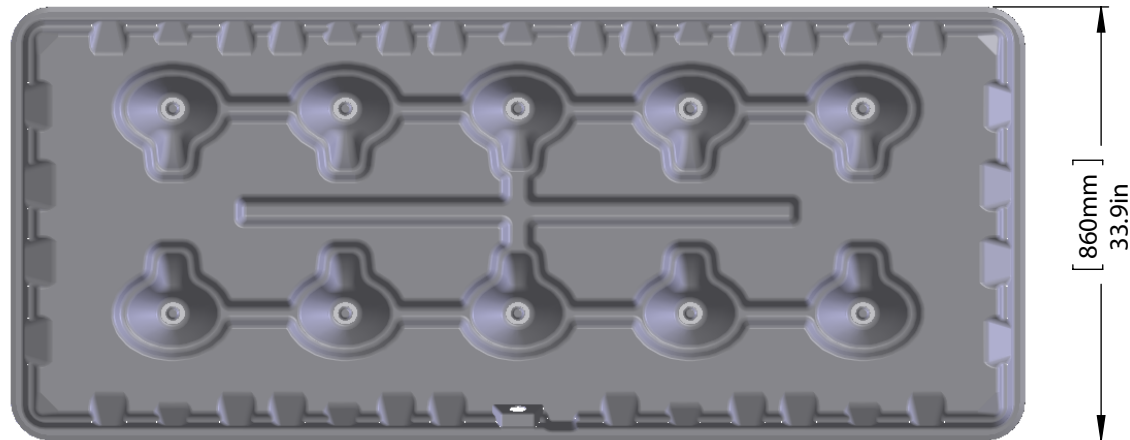

B

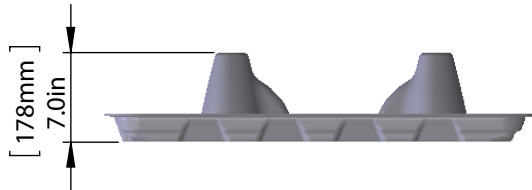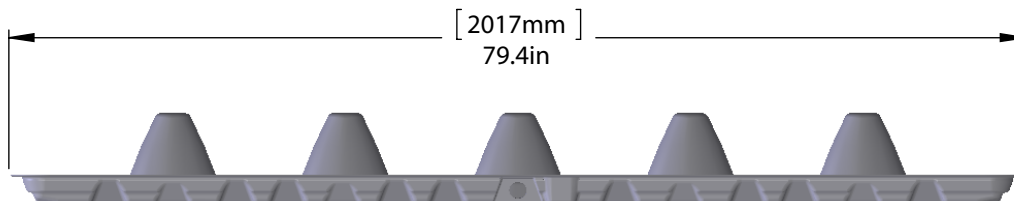

C

B

SCALE 1:20

**NOTES:**

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm .032$   
ANGULAR: MACH  $\pm .5^\circ$  BEND  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm .010$   
THREE PLACE DECIMAL  $\pm .005$

INTERPRET GEOMETRIC  
TOLERANCING PER: ANSI Y14.5, 1994

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	7/7/04
CHECKED BY ENG.	JK	7/7/04
ENG APPR.	CC	7/7/04
MFG APPR.	CC	7/7/04

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
RECTORSEAL.  
ANY REPRODUCTION IN PART OR AS A  
WHOLE WITHOUT THE WRITTEN  
PERMISSION OF RECTORSEAL IS  
PROHIBITED.



2601 Spenwick Drive,  
Houston, TX 77055  
800-231-3345

TITLE:

AG-GF 34x79 SPECIFICATION SHEET

SIZE  
**A**

SCALE: 1:15

SHEET 1 OF 1

A

5

4

3

2

1