




# UP TO 16 SEER CONDENSER A/C SPLIT SYSTEM MAC16\*A

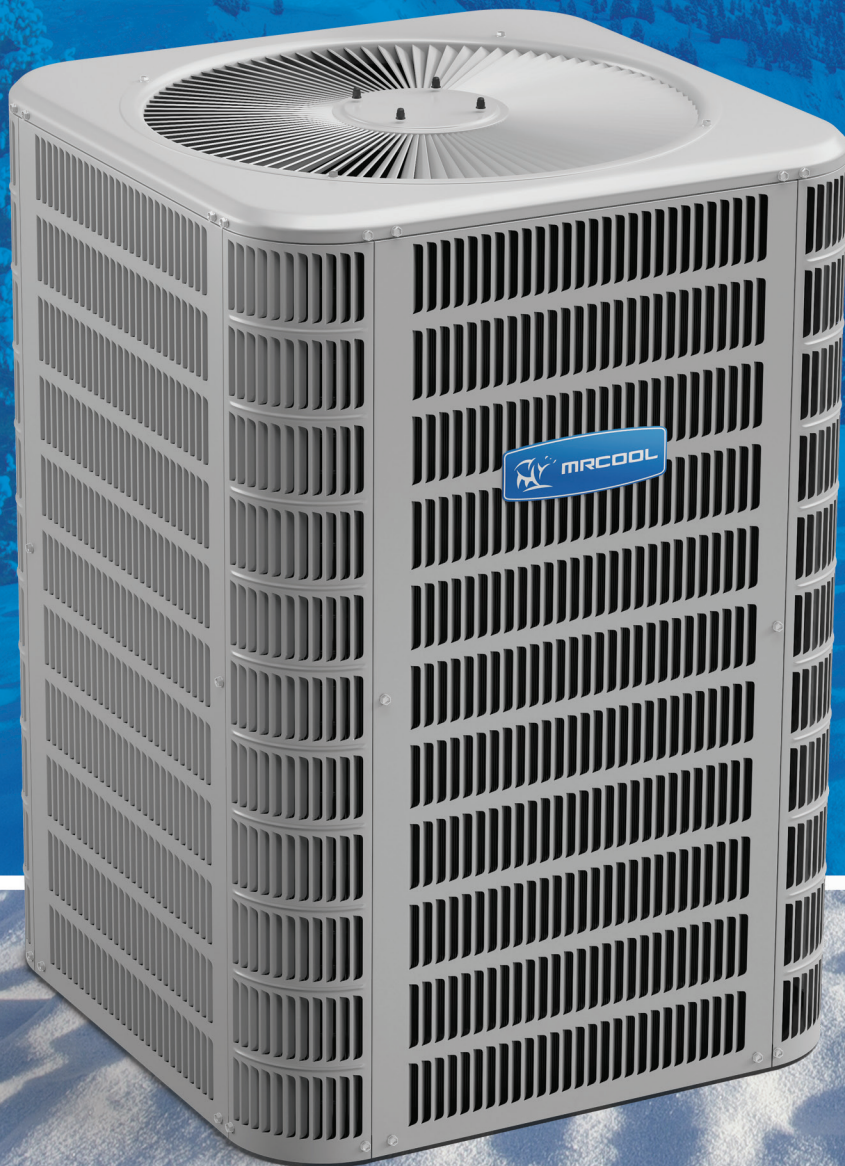

- ✓ Easy Installation & Service
- ✓ R-410A Refrigerant
- ✓ Antimicrobial Drain Pan
- ✓ CoolGuard™ Corrosion Resistant Coil
- ✓ Energy Efficient
- ✓ Durable Build & Finish
- ✓ Superior Performance
- ✓ Compact Design

48 Remington Way  
Hickory, KY 42051  
270.366.0457

[www.mrcool.com](http://www.mrcool.com)



# UP TO 16 SEER CONDENSER A/C SPLIT SYSTEM<sup>‡</sup>

## MAC16\*A

This 1.5-5 ton, 208-230 volt, R-410A refrigerant, outdoor condenser has a seasonal energy efficiency rating of up to 16 SEER when paired with other MRCOOL® products. It provides maximum comfort cooling and high energy efficiency. This unit provides cooling only performance (this is NOT a heat pump).

- Available in 1.5, 2, 2.5, 3, 3.5, 4, and 5 ton capacities.
- 10-Year Parts Limited Warranty.<sup>‡</sup>

<sup>‡</sup>Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

## SPECIFICATION

MODEL NO.		Unit	MAC16018A	MAC16024A	MAC16030A	MAC16036A	MAC16042A	MAC16048A	MAC16060A
Power Supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60
Cooling	Capacity	Btu/h	18000	23000-24000	26000-28000	33000-34000	40000-41000	46500-47500	57000-58000
	SEER	Btu/w*h	14-16	14-16	14-16	14-16	14-16	14-16	14-15
Heating	Capacity	Btu/h	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	HSPF	Btu/w*h	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Elect.	Min. Circuit	A	11.9	14.6	17.0	18	23.4	24.2	29.6
Data	Max. Amps	A	20	25	25	30	40	40	50
Compressor	Rated Load	A	9	10.9	12.8	13.6	17.9	18	22.2
	Locked Rotor	A	48	59	68	79	112	117	128
Outdoor Fan	Rated Load	A	0.7	1.0	1.0	1.0	1.0	1.7	1.8
Motor	Rated HP	HP	1/10	1/6	1/6	1/6	1/6	1/4	1/3
	Norm. RPM	RPM	1075	825	825	825	825	825	825
Refrigerant Charge	lb-oz		73	73	88	113	140	156	192
Outdoor Airflow	CFM		600-650	730-850	945-1045	1110-1275	1340-1460	1500-1600	1780-1800
Outdoor Unit	Dimension (WxHxD)	inch	24.25 x 29 x 24.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	32.25 x 43 x 32.25
	Packing (WxHxD)	inch	27 x 29.5 x 26.5	31 x 29.5 x 30.5	31 x 37.5 x 30.5	31 x 29.5 x 30.5	31 x 37.5 x 30.5	31 x 37.5 x 30.5	35 x 43.5 x 34.5
	Weight	lbs	134	152	169	181	211	218	226
Connection Liq./Suct.	inch		3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"***
Line Size Liq./Suct.	inch		3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"



\*Data provided by AHRI



\*\*Adapter with unit.