

Description (Sample Specification Language)

Manifolds are installed where multiple runs are made from a common location in parallel arrangement.

Features:

- Quick & Easy Installation
- Central Distribution Point for Appliance Runs
- Multiple mounting options




Listings:

- CSA: Certificate No. 2728525
- ICC-ES: Report No. PMG 1019
- IAPMO: File No. C-3250

Technical Data:

General

| | |
|--------------------|---|
| PORTMAN Material | ASTM A47 32510 Malleable Iron |
| 111596-08 Material | Sch 40 Steel Pipe, Welded Polyester Coating |

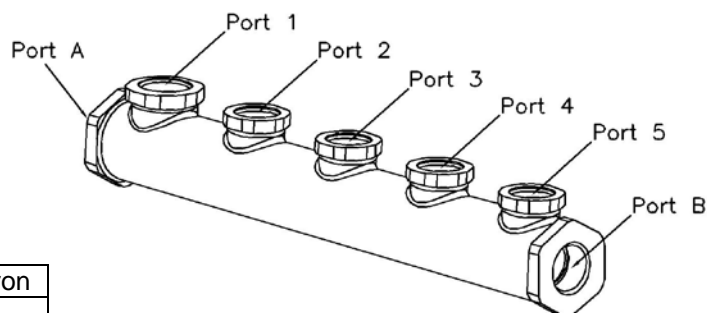

Dimensional Characteristics

| P/N | Manifold Length | Port A (NPT) | Port 1 (NPT) | Port 2 (NPT) | Port 3 (NPT) | Port 4 (NPT) | Port 5 (NPT) | Port B (NPT) | Test Port (NPT) | Weight (lbs) |
|-------------|-----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-----------------|--------------|
| 3-PORTMAN | 7-5/8" | 3/4" | 1/2" | 1/2" | 1/2" | -- | -- | 1/2" | 1/4" | 1.5 |
| 3-PORTMAN-1 | 7-5/8" | 1/2" | 1/2" | 1/2" | 1/2" | -- | -- | 1/2" | -- | 1.5 |
| 4-PORTMAN | 10-1/4" | 3/4" | 1/2" | 1/2" | 1/2" | 1/2" | -- | 1/2" | 1/4" | 1.9 |
| 4-PORTMAN-2 | 12-1/8" | 1-1/2" | 3/4" | 3/4" | 3/4" | 3/4" | -- | 1-1/2" | -- | 7.2 |
| 4-PORTMAN-3 | 14-3/8" | 2" | 1" | 1" | 1" | 1" | -- | 1-1/2" | -- | 8.6 |
| 5-PORTMAN | 12-31/32" | 3/4" | 3/4" | 1/2" | 1/2" | 1/2" | 1/2" | 1/2" | 1/4" | 2.2 |
| 5-PORTMAN-1 | 12-31/32" | 1" | 3/4" | 1/2" | 1/2" | 1/2" | 1/2" | 3/4" | 1/4" | 2.5 |
| 5-PORTMAN-2 | 14" | 1-1/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 1" | -- | 6.7 |
| 111596-08 | 11-5/8" | 3/4" | 1/2" | 1/2" | 1/2" | 1/2" | -- | 3/4" M | -- | 1.9 |