

## SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

## STAINLESS STEEL PEX CLAMP RINGS


### Clamp Rings

360° uniform compression resp. surface pressure.  
Closed Interlock: high radial loads, smooth outer contour.  
To be used with ratcheting pincer tool with visual indicator.

#### Working Pressures:

Max Working Pressure, Non Shock: 100 p.s.i.  
Max Working Temp: 180° F

- Manufactured in an ISO accredited facility.
- Not for use with PEX-AL-PEX tubing.
- Meets requirements of ASTM 2098.
- Third party listed to NSF Standard 14.

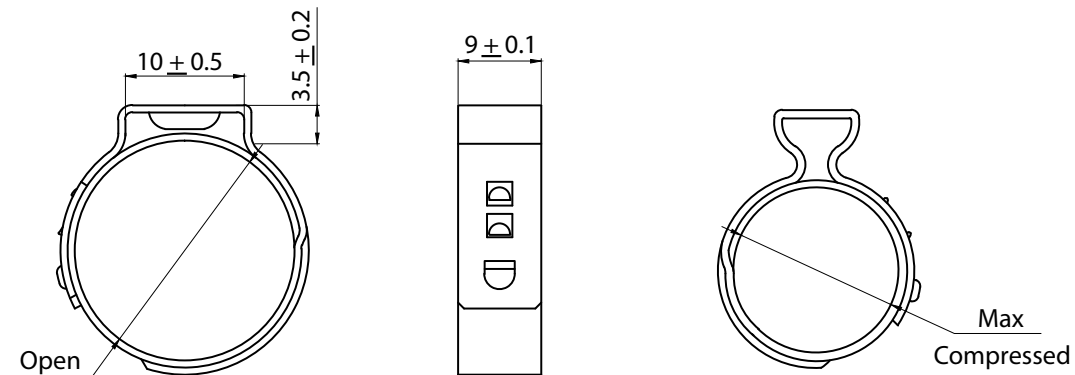

### MATERIAL SPECIFICATION

PART	MATERIAL
1 PEX clam ring	304 stainless steel

### DIMENSIONS

Size	OPEN	COMPRESSED
1/2"	0.69	0.56
5/8"	0.92	0.79
3/4"	1.17	1.04