

Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

STANDARD FEATURES:

- High-efficiency scroll compressor
- Copper tube/enhanced aluminum fin coil -5mm diameter on 1.5-3.0T
- Fully charged for 15' of tubing length
- Factory-installed filter drier
- Service valves with sweat connections and easy-to-access gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified, ETL Listed

CABINET FEATURES:

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Steel louver coil guard
- Rust-resistant coated screws
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

SYSTEM PERFORMANCE

Outdoor Unit Model No.:	GSXH504810A*	Description :	15.2 SEER2, Air Conditioner System, 4.0 Ton Outdoor System
Indoor Unit Model No.:	CAPF4961D6D*		
TXV/PISTON :	TX5N4		
Furnace Unit Model No.:	GMVC961205DN		
Rated Cooling Conditions:	Outdoor (°F DB/WB):N/A/N/A Indoor (°F DB/WB):N/A/N/A	Rated Heating Conditions:	Outdoor (°F DB/WB):N/A/N/A Indoor (°F DB/WB):N/A/N/A
Rated Cooling Capacity (Btu/hr):	45000	OD Rated Heating Capacity (Btu/hr)	N/A
EER2:	12.0	EER:	13.0
Heating COP:	N/A	SEER2:	15.2
SEER:	16.0	AFUE:	96

OUTDOOR UNIT DETAILS : GSXH504810A*

Power Supply (V/Hz/Ph):	208/230/60/1	Compressor Type:	Scroll
Min. Circuit Amps MCA (A):	26.2	Compressor Stages:	Single Stage
Quantity:	1	Max Overcurrent Protection (MOP) (A):	45
Suction Valve Connection Size (in):	-	Compressor Rated Load Amps :	19.9
Liquid Valve Connection Size (in):	-	Refrigerant Type:	R-410A
Sound Power(High/Med/Low) (dBA):	- / - / -	Holding Refrigerant Charge (oz):	180
Cooling Operation Range (°F DB):	- - -	Additional Charge (oz/ft):	-
Heating Operation Range (°F DB):	N/A	Pre-charge Piping (Length) (ft):	-
Net Weight (lb):	-	Dimensions (HxWxD) (in):	- x - x -
Gross Weight (lb):	277	*Max. Pipe Length (Vertical) (ft):	-
*Max. Pipe Length (Total) (ft):	-		

**Refer to Long Line Set Application TP-107 for lines greater than 80 ft. or vertical elevation changes more than 50 ft. for single stage equipment and 25 ft. for 2-stage equipment.*



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

Outdoor (GSXH504810) Dimensional Drawing is not available



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

STANDARD FEATURES:

- All-Aluminum evaporator coil
- Optimized for use with R-410A refrigerant
- Check flowrator for cooling and heat pump applications
- Vertical application
- 21" depth for easier attic access
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- AHRI certified
- ETL Listed

CABINET FEATURES:

- Twenty one inch depth for easier attic access
- Split seam front for easy access
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Air Conditioner System,4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

INDOOR UNIT DETAILS : CAPF4961D6D*

Quantity:	1	Configuration:	
Cased VS Uncased:	Cased	Dimensions (HxWxD) (in) :	30 x 24-1/2 x 21
Suction Connection Size (in) :	7/8	Net Weight (lb):	76
Liquid Connection Size (in) :	3/8	Gross Weight (lb):	78
Condensate Connection (in) :	3/4	Power Voltage (lb):	-
Current Type :	-	Power Phase:	-
Power Frequency :	-	Min Voltage :	-
Max Voltage :	-	MCA :	-
MOP :	-	Electric Heat Range :	-
Indoor Blower FLA :	-	Fan Motor Output :	-



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.




Submittal Data Sheet

15.2 SEER2, Air Conditioner System,4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

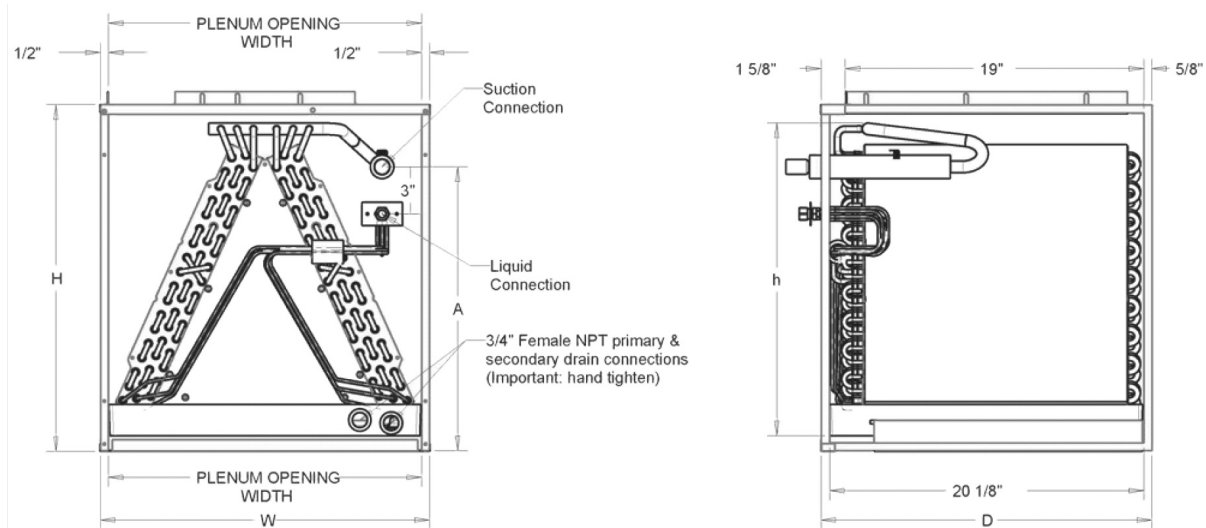

At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

STANDARD FEATURES:

- Heavy-duty aluminized-steel tubular heat exchanger
- Efficient and quiet variable-speed Blower
- Integrated communicating ComfortBridge™ technology
- Commissioning and diagnostics via on board Bluetooth with the CoolCloud™ phone and tablet application
- Stainless-steel sloped secondary heat exchanger
- Silicon Nitride igniter
- Dual 7-segment display
- Color-coded low-voltage terminals
- Two-Stage gas valve
- All models comply with California 40 ng/J
- AHRI Certified, ETL Listed
- Energy Star
- Furnace control board with self-diagnostics and provisions for electronic air cleaner and 120-volt or 24-volt humidifiers

CABINET FEATURES:

- Multi-position installation: upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1 pipe)
- Easy to install top venting with optional side vent
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (Qleak) less than or equal to 2%
- Fully insulated heat exchanger and blower section
- Bottom or side return air applications
- Heavy-gage steel cabinet with durable finish



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.



Submittal Data Sheet

15.2 SEER2, Air Conditioner System,4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

INDOOR FURNACE UNIT DETAILS : GMVC961205DNB*

Configuration:	Upflow/Horizontal	Blower/Motor Size:	Variable Speed ECM
NOx:	Natural Gas	Communication:	Communicating
Power Supply (V/Hz/Ph):	115/60/1	Temperature Rise Range High Fire (° F):	35-65
Min. Circuit Amps MCA (A):	13.9	Temperature Rise Range Low Fire (° F):	35-65
Max Overcurrent Protection (MOP) (A):	20.0	High Fire Input Capacity :	120000
AFUE :	96	High Fire Output Capacity :	115320
Vent Diameter (In):	2;3	Low Fire Input Capacity :	84000
Net Weight (lb):	-	Low fire output Capacity :	80724
Gross Weight (lb):	154	Dimensions (HxWxD) (in):	34-1/2 x 24-1/2 x 29
Power Voltage (lb):	115	Current Type :	AC
Power Phase:	1	Power Frequency :	60
Min Voltage :	-	Max Voltage :	-
MCA :	13.9	MOP :	20.0
Electric Heat Range :	-	Indoor Blower FLA :	-
Fan Motor Output :	-	Outdoor Fan LRA :	-



At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.




Submittal Data Sheet

15.2 SEER2, Air Conditioner System, 4.0 Ton, Outdoor Unit-GSXH504810A*

Submitted By : Goodman/Amana Unitary Test System

Submitted To : N/A

Tags : AHRI 208679916 Products [GSXH504810A* , CA*F4961*6D*+TXV, GMVC961205DNB*] , SEER2 15.2 , EER2 12.0

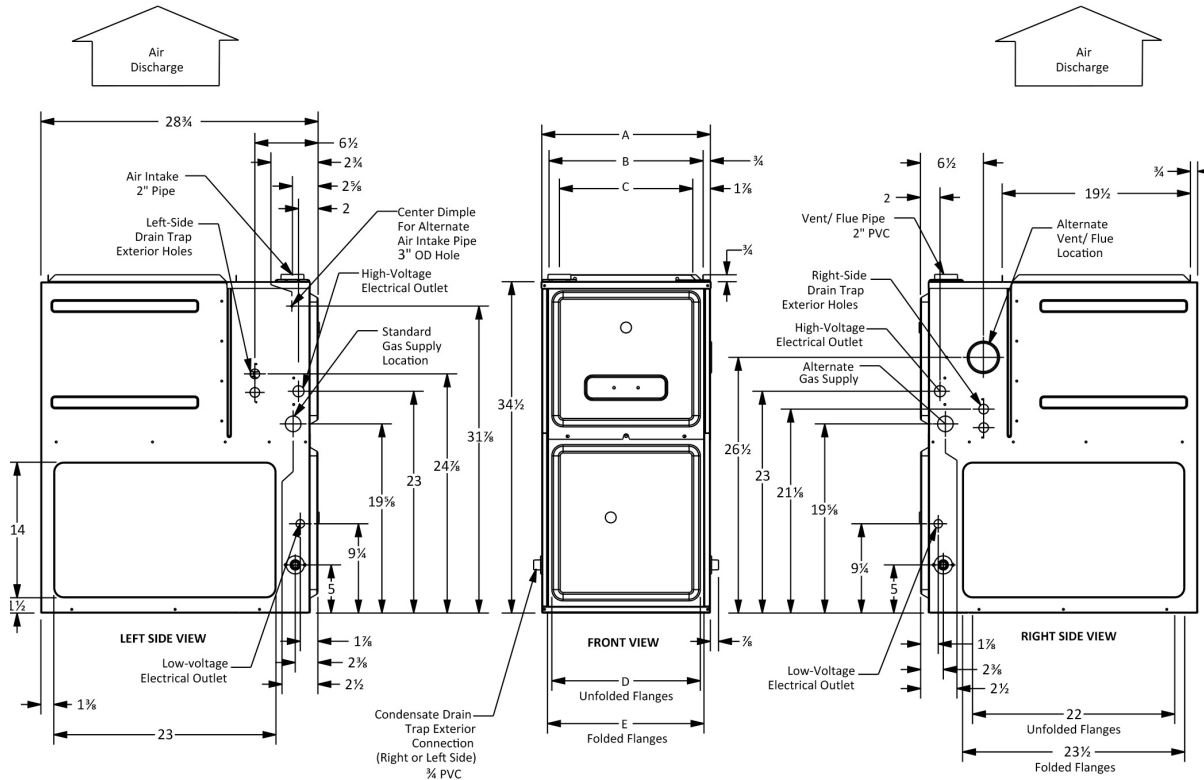

At Goodman, we believe in American dependability. Units are designed, engineered and assembled in the U.S.A.

