



Submittal Data Sheet

DTST-LTE-LA-A Daikin One Lite Smart Thermostat for Mini-Split, and Multi-Split Units

| | | | |
|---------------|--|---------------|--|
| Project Name: | | Approval: | |
| Location: | | Date: | |
| Engineer: | | Construction: | |
| Submitted to: | | Unit #: | |
| Submitted by: | | Drawing #: | |
| Reference: | | | |

MODEL COMPATIBILITY:

Compatible with Single-Zone and Multi-Zone indoor unit models: CDXS(discontinued), CTXS*, FDXS(discontinued), FTK*, FTXB*, FTX*, FTXM, FTXR, FTXS, FVXS, FTK_BXVJU, FTKB_BXVJU, FTXB_BXVJU, FTXCxxAXVJU, FTKFxxAXVJU & FTXFxx, FTXNG

*Not compatible with FTK_AXVJU, FTX_AXVJU, FTKB_AXVJU, FTXB_AXVJU, CTX_AXVJU

The following indoor units do not have the S21 connection and require an additional interface adaptor (ordered separately) to provide the S21 connect for the One Lite communication:

| Indoor Unit Models | Required Interface Adaptor |
|--|----------------------------|
| FTX09NMVJU(A), FTX12NMVJU(A), FTX09WMVJU9, FTX12WMVJU9 | KRP067A41E |
| FTX15NMVJU(A), FTX15WMVJU9 | KRP980B2E |

SPECIFICATIONS:

| | | |
|--------------------------------------|-------------------------------|--|
| Model | | DTST-LTE-LA-A |
| Description | | Daikin One Lite Smart Thermostat for Mini-Split and Multi-Split Units |
| Maximum Connections | | 1 for S21 indoor units (cannot use together with another wireless remote controller or wired remote controller) |
| Max Wiring Length | Power Wire | 5.5 ft (included) |
| | Thermostat Wire | 125 ft (Field-supplied, 18AWG, 4-core non-shielded stranded wire) |
| | S21 Communication Wire | 6 ft (included) |
| Power Supply | Thermostat | Obtained from the translation adaptor |
| | Translation Adaptor | 230 VAC |
| Dimensions | Thermostat | 3.3"W x 3.3"H x 1.04"D |
| | Translation Adaptor | 7.33"W x 2.0"H x 1.99"D |
| Weight | Thermostat | 4 oz |
| | Translation Adaptor | 9 oz |
| Storage Temperature | | 32°F to 120°F |
| Ambient Operation Temperature | Thermostat | 32°F to 120°F |
| | Translation Adaptor | 32°F to 120°F |
| Humidity | | 20 to 95% RH (non-condensing) |
| Compliance | | Compliant to California Title 24 (OCST listed), FCC Certified (FCC Part 15 subpart B), UL Listed |

PRODUCT IMAGE:

Thermostat:



Translation Adaptor:



Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056

www.daikinac.com www.daikincity.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


| | |
|---|--|
| Project Name: _____ Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____ | Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____ |
|---|--|

FEATURES:

- Compact, non-intrusive design suitable for most interior environments
- Multifunction push buttons labeled for mode, fan, setpoint up, set point down
- Wifi-enabled smart thermostat with iOS and Android app control
- Voice control by Amazon Alexa and Google Assistant
- Installer wizard app available (recommended). Set up using buttons is possible, but not recommended
- Multi-language support: English, Spanish, French (Daikin One Home app only)
- Built-in temperature and humidity sensors
- 1 Auxiliary Heat output (dry contact), configurable as primary or secondary heat source
- Over-the-air software update capable (requires wi-fi connection)
- Indoor unit Control: Mode (Auto/Heat/Cool/Aux Heat/Emergency Heat), Setpoint (Dual/Single), Fan Speed, Louver, Fan On/Auto (with minimum run time)
- LED Mode indicator for heating and cooling
- Dehumidification function
- Error and maintenance notification
- Programmable schedule with adjustable hold function
- Energy and comfort functions: Vacation/Away/Night mode, and geo-fencing
- Outdoor environment monitoring: outdoor temperature, outdoor humidity, and weather forecast (on homeowner app only)
- Compatible Daikin One Cloud Services

SYSTEM DIAGRAM:

For S21 indoor units (CDXS(discontinued), CTXS*, FDXS (discontinued), FTK*, FTXB*, FTX*, FTXM, FTXR, FTXS, FVXS, FTXNG) (*see exceptions on page 1):

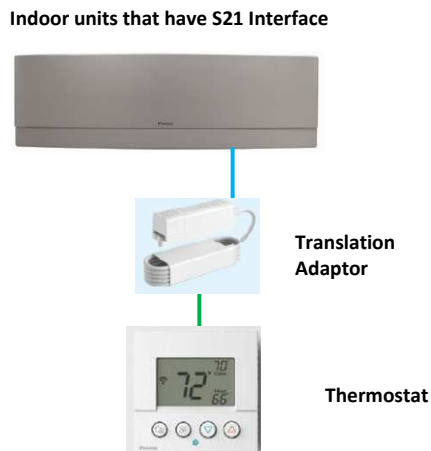

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056

www.daikinac.com www.daikincity.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)




Submittal Data Sheet

DTST-LTE-LA-A Daikin One Lite Smart Thermostat
for Mini-Split, and Multi-Split Units

| | | | |
|---------------|--|---------------|--|
| Project Name: | | Approval: | |
| Location: | | Date: | |
| Engineer: | | Construction: | |
| Submitted to: | | Unit #: | |
| Submitted by: | | Drawing #: | |
| Reference: | | | |

WIRING DIAGRAM:

For S21 indoor units (CDXS (discontinued), CTXS*, FDXS (discontinued), FTK*, FTXB*, FTX*, FTXM, FTXR, FTXS, FVXS)
(*see exceptions on page 1):

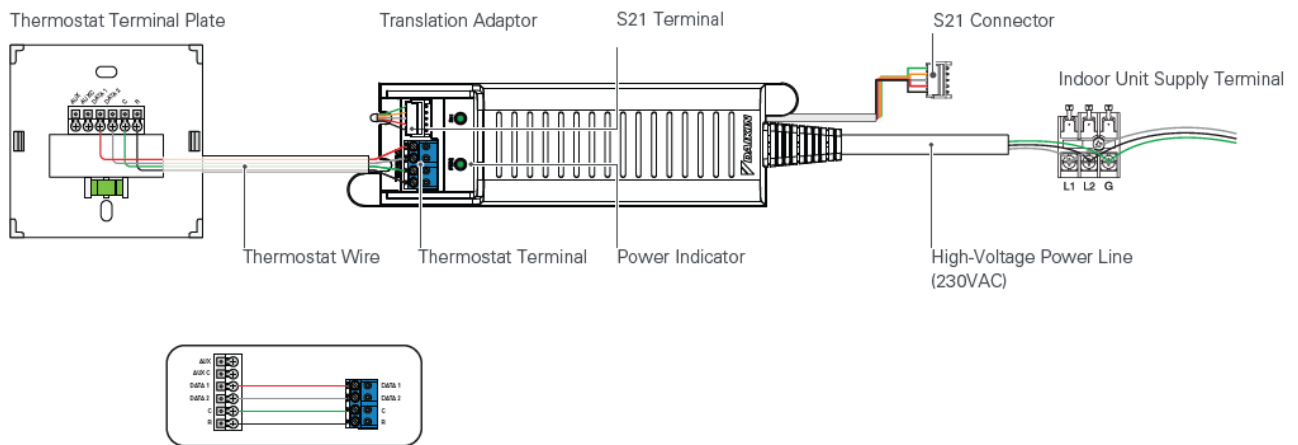

Note:
Wires should match up on thermostat terminal plate and thermostat terminal




Submittal Data Sheet

DTST-LTE-LA-A Daikin One Lite Smart Thermostat
for Mini-Split, and Multi-Split Units


| | | | |
|---------------|--|---------------|--|
| Project Name: | | Approval: | |
| Location: | | Date: | |
| Engineer: | | Construction: | |
| Submitted to: | | Unit #: | |
| Submitted by: | | Drawing #: | |
| Reference: | | | |

DIMENSIONS:

- Thermostat:

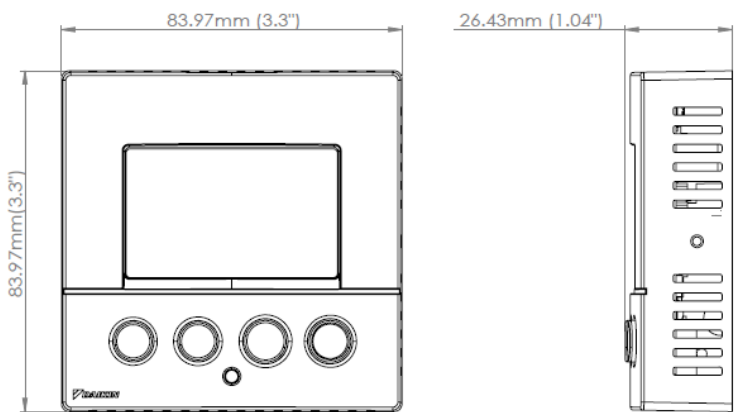

- Translation Adaptor:

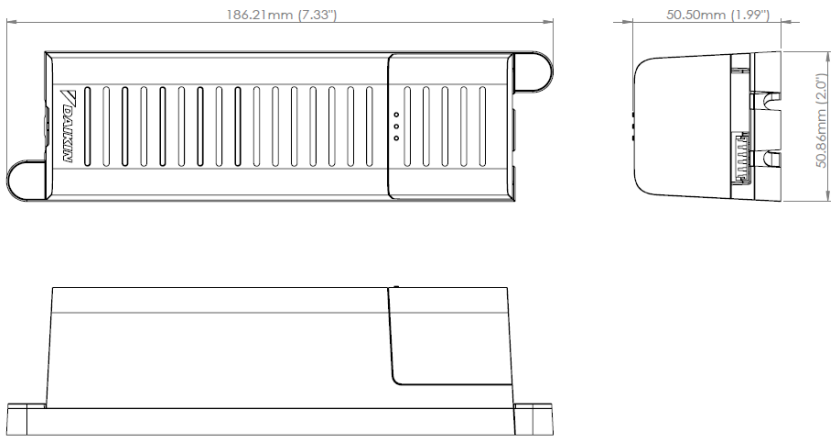

DOCUMENTATION:

Documentation available on www.daikinone.com:

- Submittal
- Installation Manual
- Product Flyer

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056
www.daikinac.com www.daikincity.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)