

MRCOOL

Advantage Series ^{3rd Gen}

Ductless Mini-Split Heat Pump A/C

Affordable Efficiency



Affordability


High efficiency

Low ambient cooling

16 Foot Install Kit Included

1 Year Compressor &

2 Year Parts Warranty

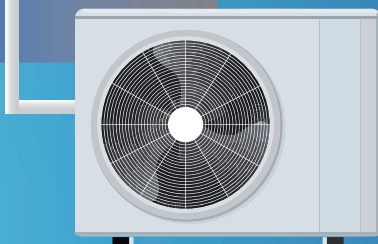

Best Features



Timer



Leakage Detection



Follow me®



Gold Fin® Condenser



Smartphone App

LOW 5°F

Low Ambient Cooling



Quiet Running



DC Inverter

Specification

Model No.	Indoor Unit Outdoor Unit	A-09-HP-WMAH-230B A-09-HP-C-230B	A-12-HP-WMAH-230B A-12-HP-C-230B	A-18-HP-WMAH-230B A-18-HP-C-230B	A-24-HP-WMAH-230B A-24-HP-C-230B
-----------	-----------------------------	-------------------------------------	-------------------------------------	-------------------------------------	-------------------------------------

Capacity & Performance

Cooling Capacity	Btu/h	9000	12000	18000	24000
SEER	Btu/w	18	19	19	17
Heating Capacity	Btu/h	9800	11800	18000	25000
HSPF		9.5	9.5	10.0	9.5
Indoor noise level (Hi/Mi/Lo)	dB(A)	36/-/23	40.5/-/25	45/-/29	45.5/-/33

Electrical Parts

Power supply	Ph-V-Hz	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph
Minimum Circuit (Disconnect)	A	15.0	15.0	15.0	18.0
Maximum Fuse (Breaker)	A	15.0	15.0	20.0	25.0

Dimensions & Weight

Net Dimension	Indoor	inch	28.43x7.36x11.42	31.57x7.44x11.69	37.99x8.46x12.56	42.52x8.90x13.19
(WxDxH)	Outdoor	inch	30.31x11.81x21.85	31.50x13.11x21.81	31.50x13.11x21.81	33.27x14.29x27.64
Packing Dimension	Indoor	inch	31.10x10.63x14.57	34.45x11.22x14.76	41.14x12.01x15.94	45.47x16.34x12.40
(WxDxH)	Outdoor	inch	35.43x13.58x23.03	36.22x15.35x24.21	36.22x15.35x24.21	38.00x15.55x30.12
Net weight	Indoor	lbs	17	18.96	24.03	30.2
	Outdoor	lbs	66.8	67	79.8	105.16
Gross Weight	Indoor	lbs	25	30	34	40
	Outdoor	lbs	77	81	102	133

Refrigerant & Piping

*Refrigerant R410A	oz	R410A/28.2	R410A/33.9	R410A/52.9	R410A/63.5
Piping Size Liquidside/Gasside	inch	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"

National Average Annual Operating Costs

Cooling Cost*	\$	67	86	128	189
Heating Cost*	\$	220	265	371	561

* Data provided by AHRI



† Starting charge does not guarantee line charge.
Running pressure must be checked by a technician.

WWW.MRCOOL.COM