

Job Name:	
Tag#	



## Submittal Data Sheet

FTK24AXVJU / RK24AXVJU

2-Ton Wall Mounted Cooling Only System



Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. If product is installed in a commercial application, limited warranty period is 5 years.

### Indoor Specifications

Airflow Rate (cfm)	Cooling	
	H	M
	716	605
	L	SL
	467	395
Sound (dBA) H / M / L / SL	53 / 45 / 39 / 34	
Dimensions (H × W × D) (in)	11-11/16 × 39-1/2 × 11-1/3	
Weight (Lbs)	31	

### Outdoor Specifications

Compressor	Hermetically Sealed Swing Type	
Refrigerant	R-410A	
Factory Charge (Lbs)	3.86	
Refrigerant Oil	PVE (FVC50K)	
Airflow Rate (cfm)	Cooling	
	H	1,908
Sound Pressure Level (dBA)	55	
Dimensions (H × W × D) (in)	27-13/32 × 36-5/8 × 13-13/16	
Weight (Lbs)	106	

### Efficiency

Cooling	
SEER	19
EER	12.2

### Performance

Cooling (Btu/hr)	
Rated (Min/Max)	21,200 (5,500 / 24,000)
Sensible @ AHRI	15,670
Moisture Removal gal/h	0.67
Standard Operating Range	50°F – 115°F
Extended Operating Range*	-4°F – 115°F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB  
Outdoor: 95°F DB/75°F WB

\*With field settings and wind baffle

### Electrical

	208/60/1	230/60/1
System MCA	13.4	13.4
System MFA	20.0	20.0
Compressor RLA	13.0	13.0
Outdoor fan motor FLA	1.0	1.0
Outdoor fan motor W	128	128
Indoor fan motor FLA	.50	.50
Indoor fan motor W	35	35


MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)  
RLA: Rated load amps (A) W: Fan motor rated output (W)

### Piping

Liquid (in)	1/4
Gas (in)	5/8
Drain (in)	3/4
Max. Interunit Piping Length (ft)	98.4
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.21

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

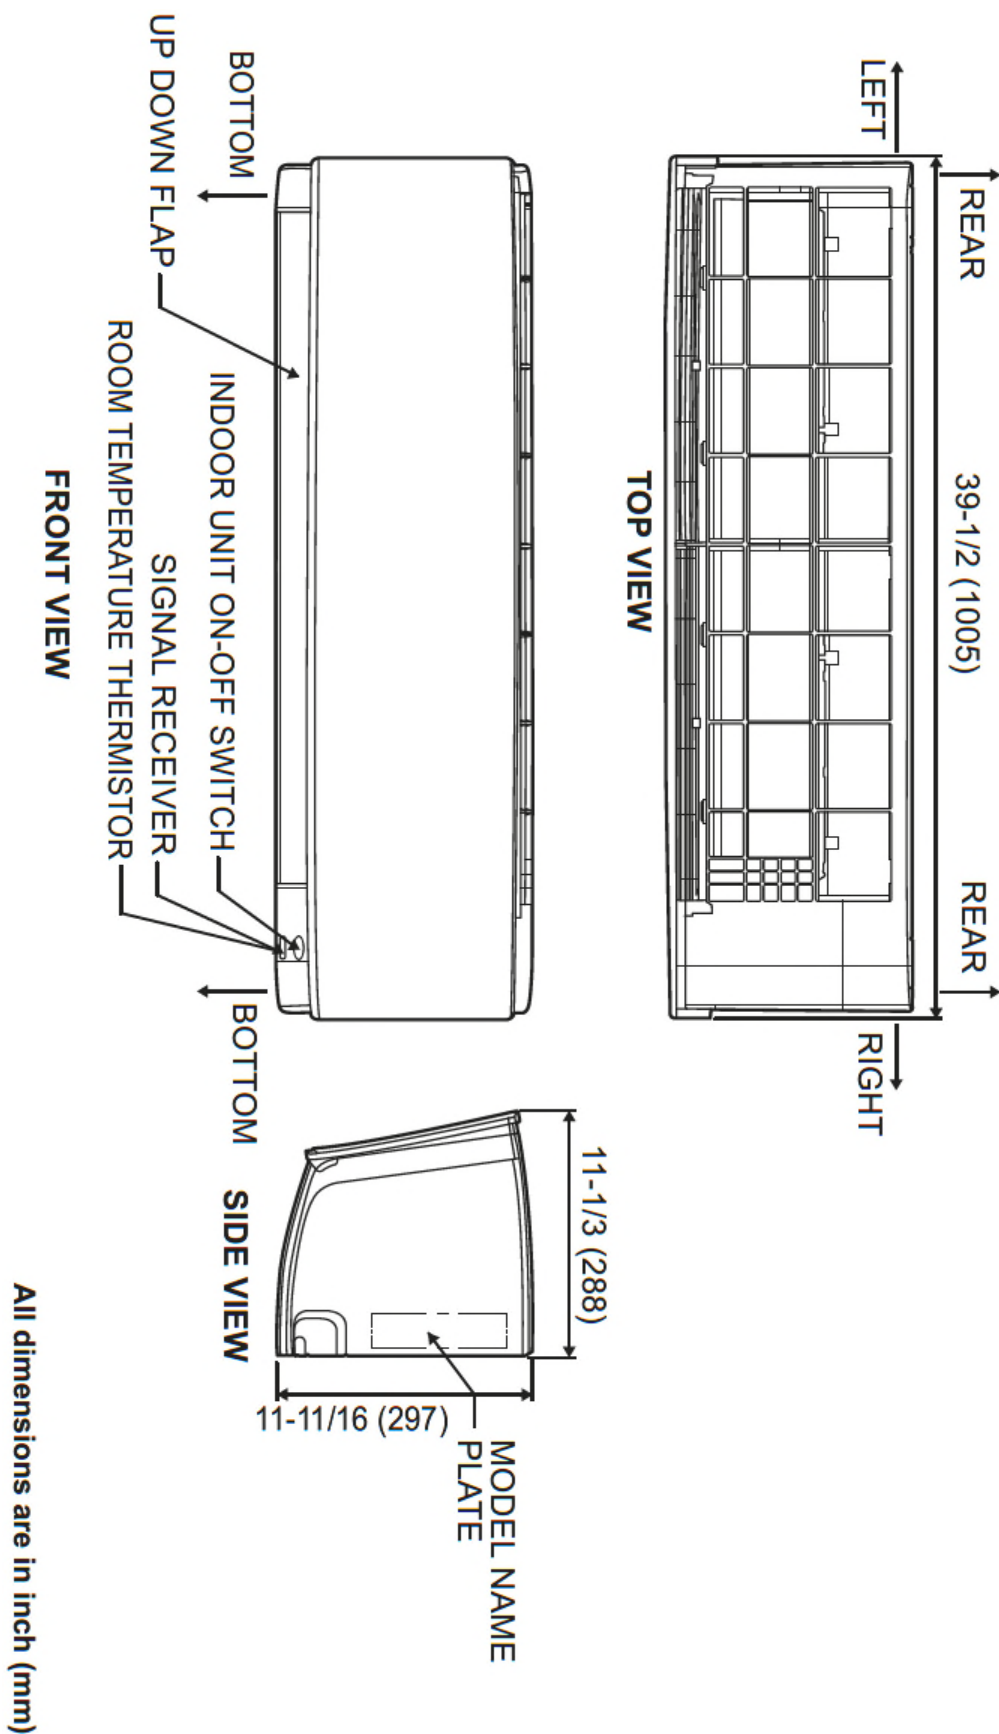


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Dimension		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
Model																		
18/24	27-13/32 (696)	36-5/8 (930)	2-19/32 (66)	15/32 (12)	13-13/16 (351)	1-1/16 (27)	15/32 (12)	24 (610)	6-7/8 (175)	5-23/32 (145)	3-1/32 (77)	2-31/32 (75)	13/16 (21)	5-19/32 (142)	5/16 (8)	17/32 (13)	13-31/32 (355)	

**All dimensions are in inch (mm)**

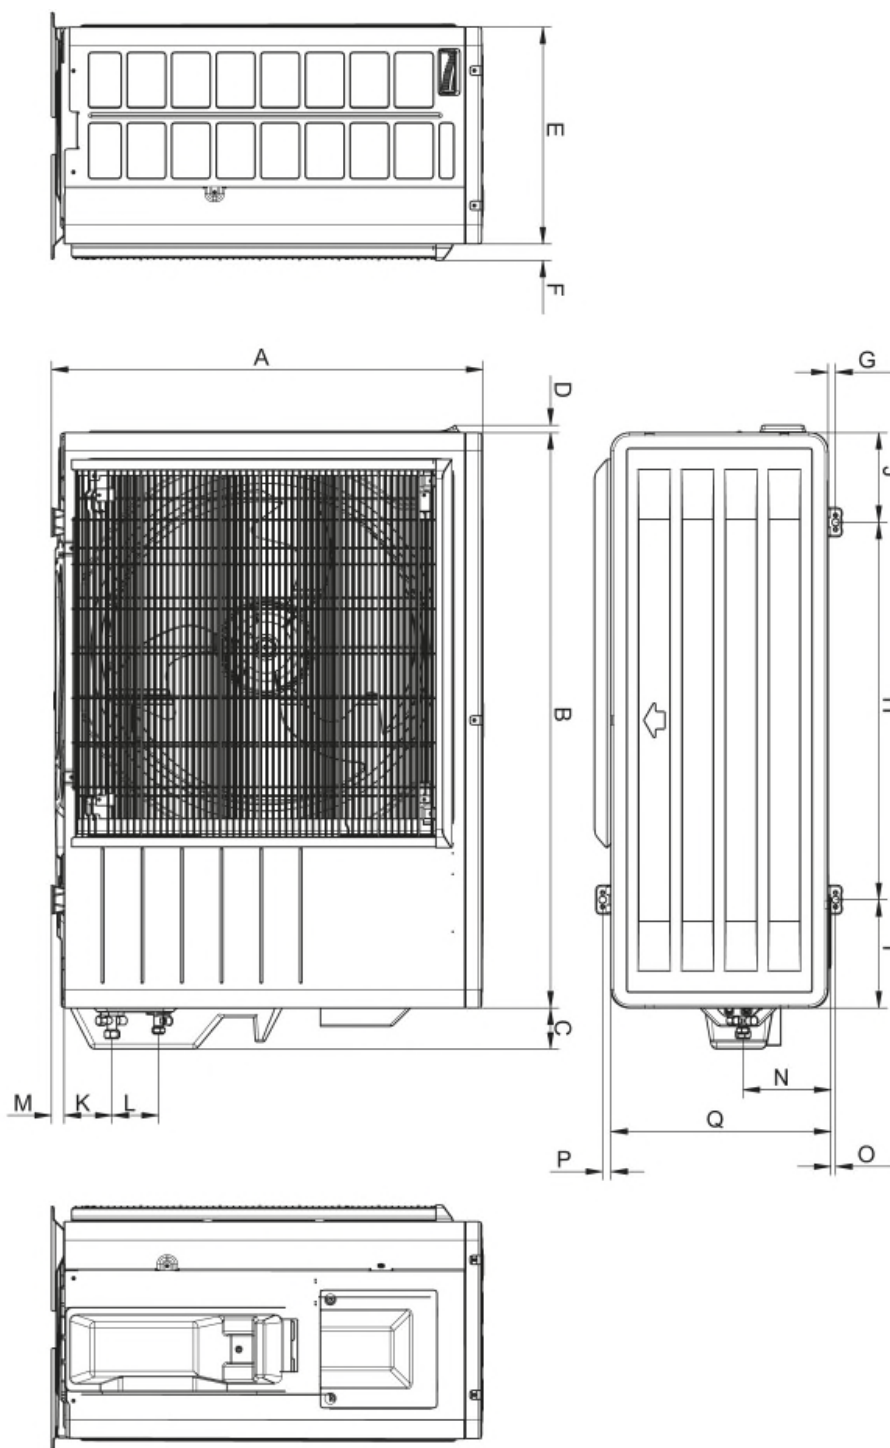

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Indoor Unit		
Included	Part Number	Description
	BRP072A43	Wireless Interface Adaptor
	AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)
	BRC944B2-A08	Wired Remote Controller kit
	BRCW901A08	Wired Remote Controller Cable – 25ft (Included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10ft
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump

Outdoor Unit		
Included	Part Number	Description
	DACA-WB-1	Powder-Coated Wall-Mounted Bracket
	KPW063B4E	Air Adjustment Grille