



Job Name:	
Tag#	



## Submittal Data Sheet

FTX09NMVJU / RXL09QMVJU

0.75-Ton Wall Mounted Heat Pump System

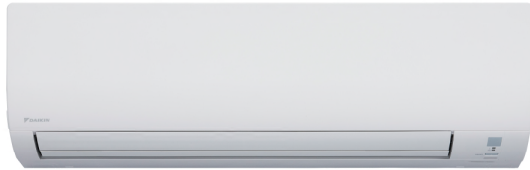

Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. If product is installed in a commercial application, limited warranty period is 5 years.

### Indoor Specifications

Airflow Rate (cfm)	Cooling		Heating	
	H	M	H	M
	417	297	403	328
Sound (dBA) H / M / L / SL	L	SL	L	SL
	244	141	251	215
Dimensions (H x W x D) (in)	11-1/4 x 30-5/16 x 8-3/4			
Weight (Lbs)	18			

### Outdoor Specifications

Compressor	Hermetically Sealed Swing Type			
Refrigerant	R-410A			
Factory Charge	2.09			
Refrigerant Oil	PVE (FVC50K)			
Airflow Rate (cfm)	Cooling		Heating	
	H	M	H	M
	1,105	865	922	777
Sound Pressure Level (dBA)	49			
Dimensions (H x W x D) (in)	21-5/8 x 26-9/16 x 11-3/16			
Weight (Lbs)	60			

### Efficiency

Cooling		Heating	
SEER	20.0	HSPF	12.5
EER	12.5	COP	4.20

### Performance

Cooling (Btu/hr)	
Rated (Min/Max)	9,000 (4,400 / 10,900)
Sensible @ AHRI	8,170
Moisture Removal gal/h	.32
Standard Operating Range	50°F – 115°F
Extended Operating Range*	-4°F – 115°F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB  
Outdoor: 95°F DB/75°F WB

\*With field settings and wind baffle

Heating (Btu/hr)	
1: @ 47° Rated (Min/Max)	10,900 (4,400 / 16,000)
2: @ 17° Rated	6,700
3: @ 5° Max	10,900
Operating Range	-13°F – 60°F

1: Rated Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 47°F DB/43°F WB  
2: Rated Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 17°F DB/15°F WB  
3: Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 5°F DB/5°F WB

### Electrical

	208/60/1	230/60/1
System MCA	9.5	9.5
System MFA	15	15
Compressor RLA	8.5	8.5
Outdoor fan motor FLA	.15	.15
Outdoor fan motor W	18	18
Indoor fan motor FLA	.20	.20
Indoor fan motor W	21	21

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)  
RLA: Rated load amps (A) W: Fan motor rated output (W)

### Piping

Liquid (in)	1/4
Gas (in)	3/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	65.625
Max. Interunit Height Difference (ft)	49.25
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.21


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 1 of 4

# FTX09NMVJU Dimensional Data

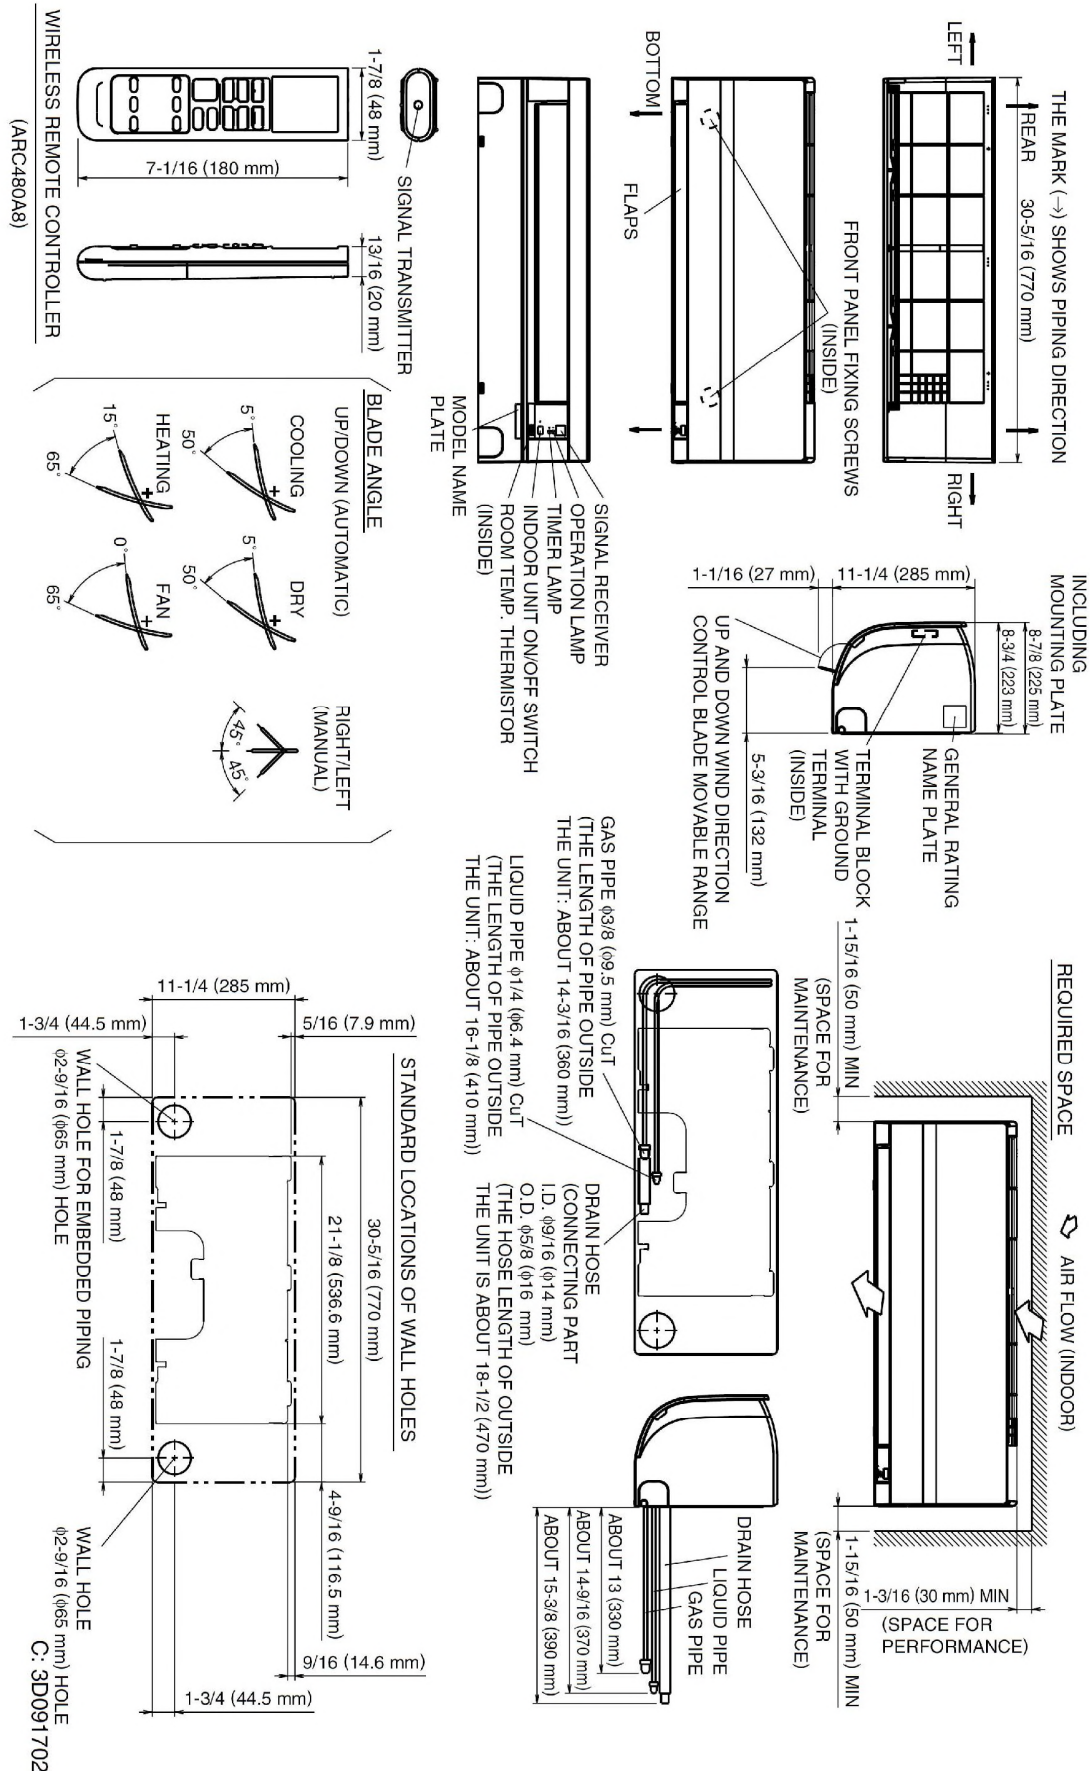


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 2 of 4

# RXL09QMVJU Dimensional Data

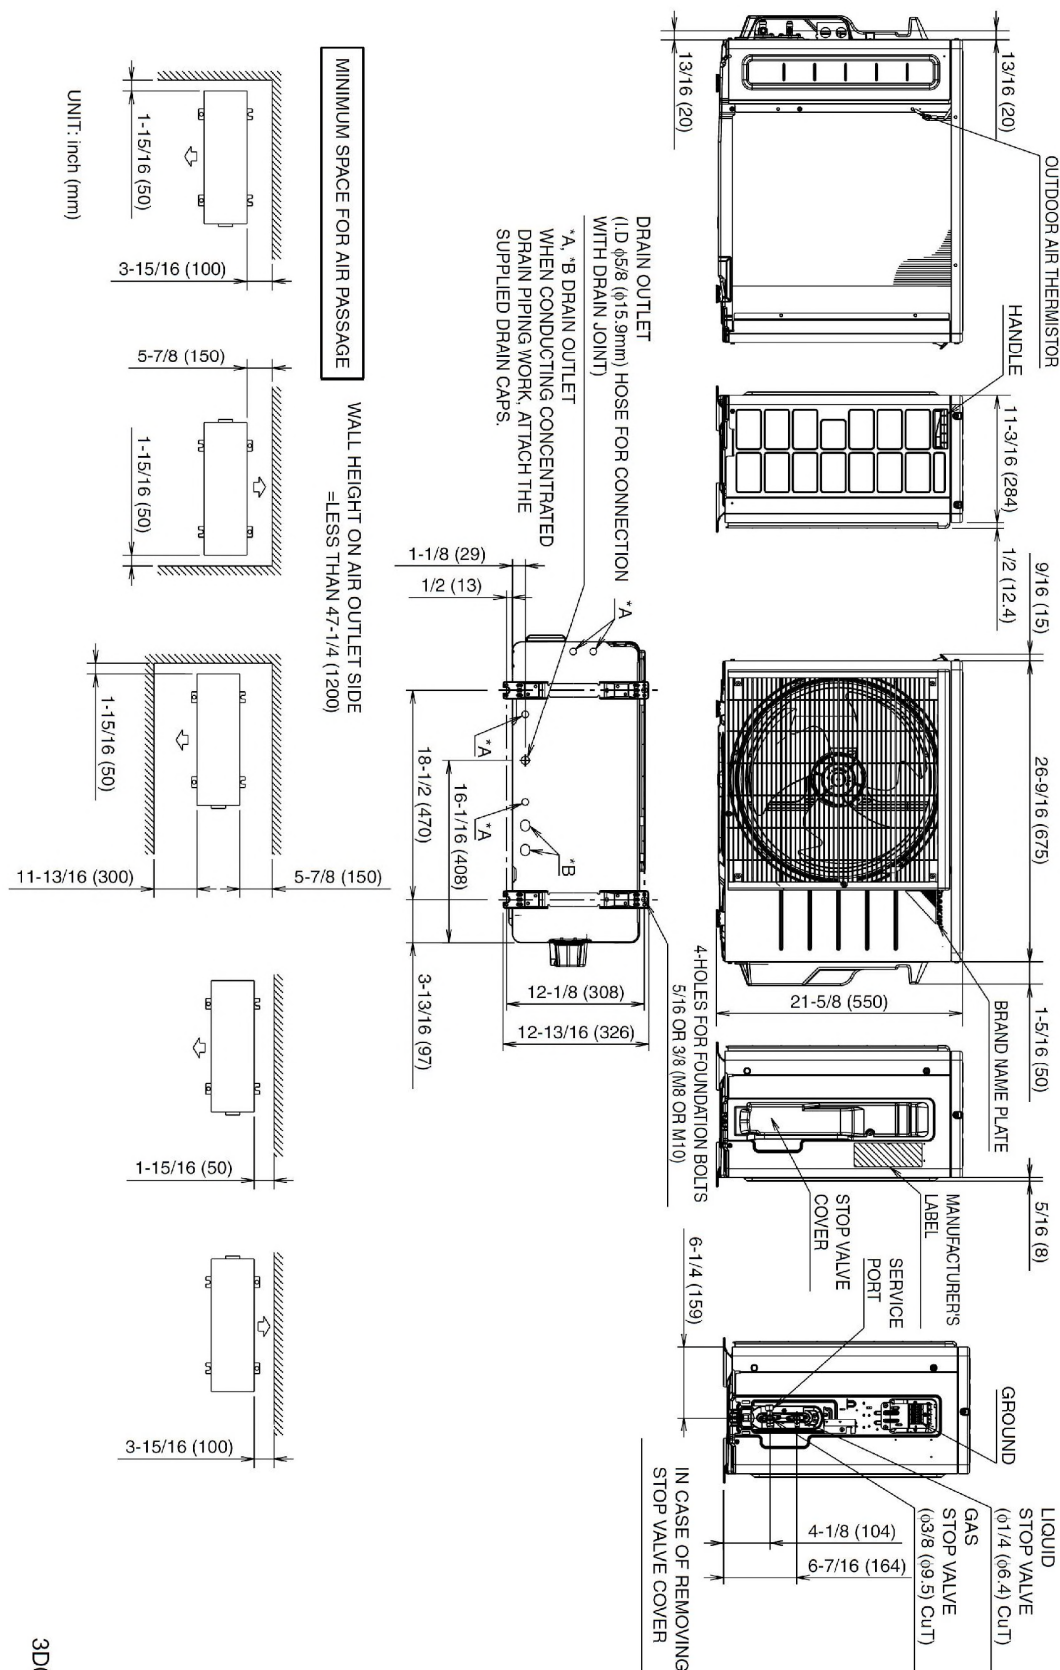

3D092206A

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 3 of 4

# Optional Accessories



## Indoor Unit

Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter (S21 Adapter Included)
	BRC944B2-A08	Wired Remote Controller kit (Adaptor Required)
	BRCW901A08	Wired Remote Controller Cable – 25ft (Included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10ft
	KRP067A41	Adaptor for wired remote controller (09 & 12)
	KAF970A45	Titanium apatite photocatalytic air-purifying filter WITH frame
	KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S + KRP067A41	Interface Adaptor for DIII-NET

## Outdoor Unit

Included	Part Number	Description
	DACA-WB-1	Powder-Coated Wall-Mounted Bracket
	KPW937E4	Air direction adjustment grille (09 & 12)
	KEH067A41E	Daikin BMS Drain Pan Heater Small (09 & 12)
	KKG067A41	Back protection wire net (09 & 12)
	KPS067A41	Snow hood (intake side plate) (09 & 12)
	KPS067A42	Snow hood (intake rear plate) (09 & 12)
	KPS067A44	Snow hood (outlet) (09 & 12)
	KKP937A4	Drain Plug for OD Unit

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)





Job Name:	
Tag#	



## Submittal Data Sheet

FTX12NMVJU / RXL12QMVJU

1-Ton Wall Mounted Heat Pump System

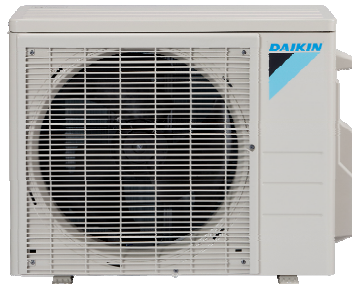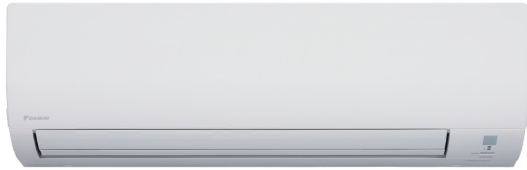

Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. If product is installed in a commercial application, limited warranty period is 5 years.

### Indoor Specifications

Airflow Rate (cfm)	Cooling		Heating	
	H	M	H	M
	434	311	413	321
Sound (dBA) H / M / L / SL	L	SL	L	SL
	247	145	258	219
Sound (dBA) H / M / L / SL		45 / 37 / 30 / 19		45 / 37 / 30 / 26
Dimensions (H x W x D) (in)		11-1/4 x 30-5/16 x 8-3/4		
Weight (Lbs)		18		

### Outdoor Specifications

Compressor	Hermetically Sealed Swing Type			
Refrigerant	R-410A			
Factory Charge	2.09			
Refrigerant Oil	PVE (FVC50K)			
Airflow Rate (cfm)	Cooling		Heating	
	H	M	H	M
	1,144	865	1,006	777
Sound Pressure Level (dBA)	L	SL	L	SL
	50			
Dimensions (H x W x D) (in)		21-5/8 x 26-9/16 x 11-3/16		
Weight (Lbs)		70		

### Efficiency

Cooling		Heating	
SEER	20.0	HSPF	12.0
EER	12.5	COP	3.90

### Performance

Cooling (Btu/hr)	
Rated (Min/Max)	10,900 (4,400 / 13,300)
Sensible @ AHRI	9,100
Moisture Removal gal/h	.45
Standard Operating Range	50°F – 115°F
Extended Operating Range*	-4°F – 115°F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB  
Outdoor: 95°F DB/75°F WB

\*With field settings and wind baffle

Heating (Btu/hr)	
1: @ 47° Rated (Min/Max)	13,600 (4,400 / 18,800)
2: @ 17° Rated	8,800
3: @ 5° Max	14,330
Operating Range	-13°F – 60°F

1: Rated Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 47°F DB/43°F WB  
2: Rated Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 17°F DB/15°F WB  
3: Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 5°F DB/5°F WB

### Electrical

	208/60/1	230/60/1
System MCA	13.0	13.0
System MFA	15	15
Compressor RLA	12.0	12.0
Outdoor fan motor FLA	.17	.17
Outdoor fan motor W	20	20
Indoor fan motor FLA	.23	.23
Indoor fan motor W	28	28

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)  
RLA: Rated load amps (A) W: Fan motor rated output (W)

### Piping

Liquid (in)	1/4
Gas (in)	3/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	65.625
Max. Interunit Height Difference (ft)	49.25
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.21


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 1 of 4

# FTX12NMVJU Dimensional Data

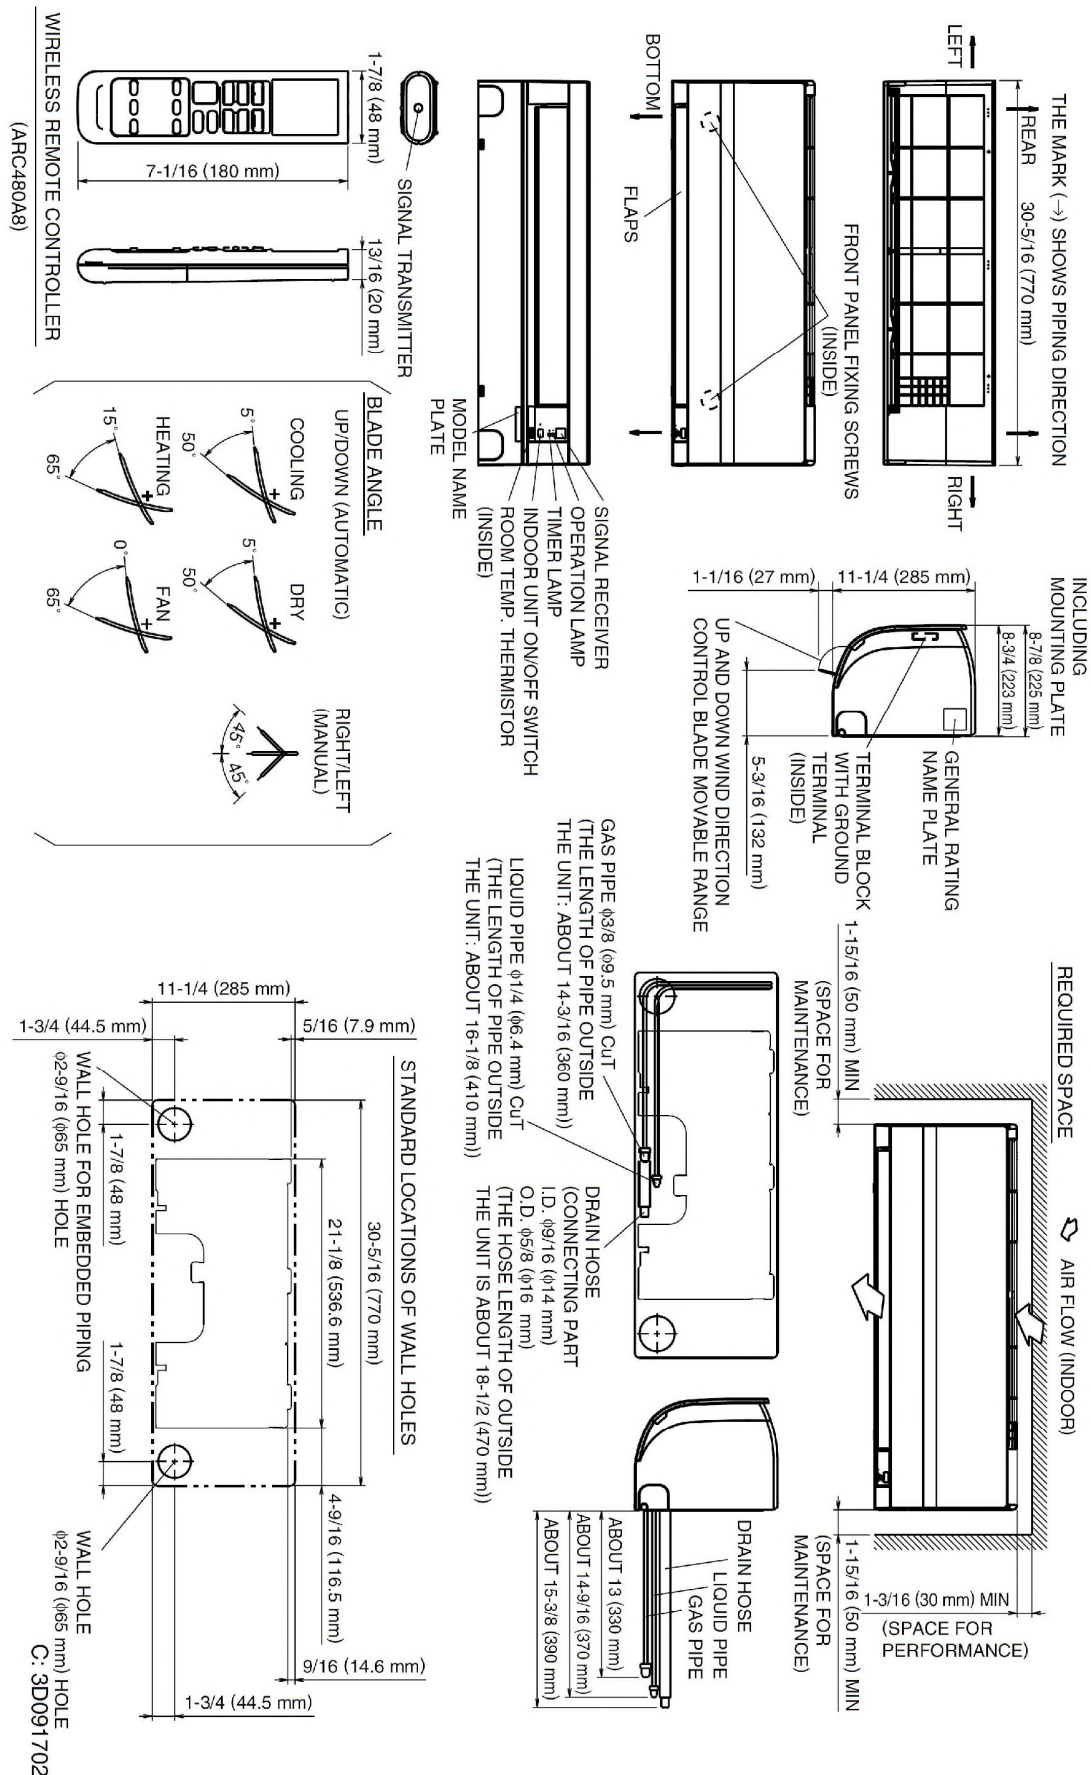


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 2 of 4

# RXL12QMVJU Dimensional Data

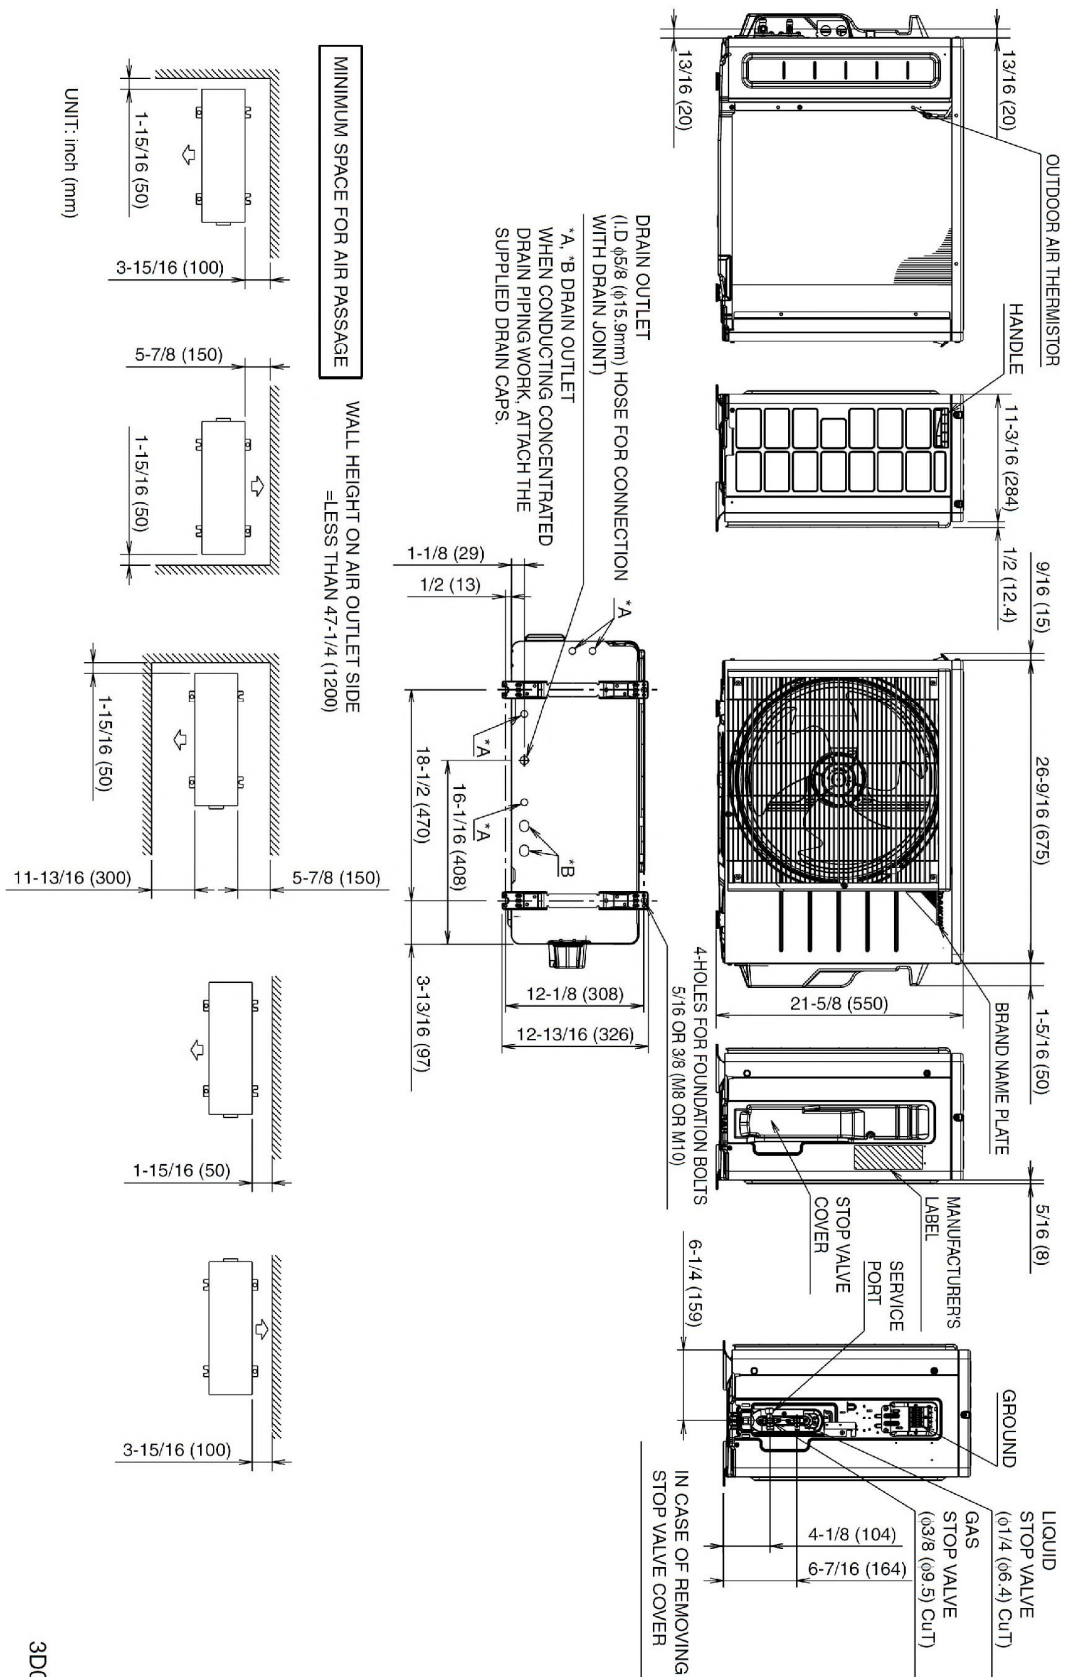

3D092206A

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 3 of 4

# Optional Accessories



## Indoor Unit

Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter (S21 Adapter Included)
	BRC944B2-A08	Wired Remote Controller kit (Adaptor Required)
	BRCW901A08	Wired Remote Controller Cable – 25ft (Included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10ft
	KRP067A41	Adaptor for wired remote controller (09 & 12)
	KAF970A45	Titanium apatite photocatalytic air-purifying filter WITH frame
	KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S + KRP067A41	Interface Adaptor for DIII-NET

## Outdoor Unit

Included	Part Number	Description
	DACA-WB-1	Powder-Coated Wall-Mounted Bracket
	KPW937E4	Air direction adjustment grille (09 & 12)
	KEH067A41E	Daikin BMS Drain Pan Heater Small (09 & 12)
	KKG067A41	Back protection wire net (09 & 12)
	KPS067A41	Snow hood (intake side plate) (09 & 12)
	KPS067A42	Snow hood (intake rear plate) (09 & 12)
	KPS067A44	Snow hood (outlet) (09 & 12)
	KKP937A4	Drain Plug for OD Unit




Job Name:	
Tag#	



## Submittal Data Sheet

## FTX15NMVJU / RXL15QMVJU

### 1.25-Ton Wall Mounted Heat Pump System

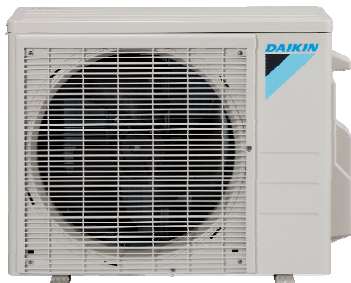

Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

### Indoor Specifications

Airflow Rate (cfm)	Cooling		Heating	
	H	M	H	M
	593	505	653	554
	L	SL	L	SL
	431	367	470	399
Sound (dBA) H / M / L / SL	45 / 41 / 36 / 33		45 / 41 / 37 / 33	
Dimensions (H × W × D) (in)		11-5/8 × 39 × 10-3/8		
Weight (Lbs)		27		

### Outdoor Specifications

Compressor	Hermetically Sealed Swing Type			
Refrigerant	R-410A			
Factory Charge (Lbs)	3.20			
Refrigerant Oil	PVE (FVC50K)			
Airflow Rate (cfm)	Cooling		Heating	
	H		H	
	2,044		2,044	
	L		L	
	1,762		1,585	
Sound Pressure Level (dBA)	50 / 55			
Dimensions (H x W x D) (in)	28-15/16 x 24-1/4 x 12-5/8			
Weight (Lbs)	108			

### Efficiency

Cooling		Heating	
SEER	20	HSPF	12.5
EER	13	COP	4.0

### Performance

Cooling (Btu/hr)	
Rated (Min/Max)	15,000 (5,800 / 18,400)
Sensible @ AHRI	12,470
Moisture Removal gal/h	.63
Standard Operating Range	50°F – 115°F
Extended Operating Range*	-4°F – 115°F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB  
Outdoor: 95°F DB/75°F WB

\*With field settings and wind baffle

Heating (Btu/hr)	
1: @ 47° Rated (Min/Max)	18,300 (5,800 / 24,600)
2: @ 17° Rated	11,500
3: @ 5° Max	18,300
Operating Range	-13°F – 60°F

1: Rated Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 47°F DB/43°F WB  
2: Rated Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 17°F DB/15°F WB  
3: Heating Conditions: Indoor: 70°F DB/60°F WB  
Outdoor: 5°F DB/5°F WB

### Electrical

	208/60/1	230/60/1
System MCA	13	13
System MFA	15	15
Compressor RLA	11.8	11.8
Outdoor fan motor FLA	.47	.47
Outdoor fan motor W	71	71
Indoor fan motor FLA	.23	.23
Indoor fan motor W	33	33

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)  
RLA: Rated load amps (A) W: Fan motor rated output (W)

### Piping

Liquid (in)	1/4
Gas (in)	1/2
Drain (in)	5/8
Max. Interunit Piping Length (ft)	98.5
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.21


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 1 of 4

# FTX15NMVJU Dimensional Data

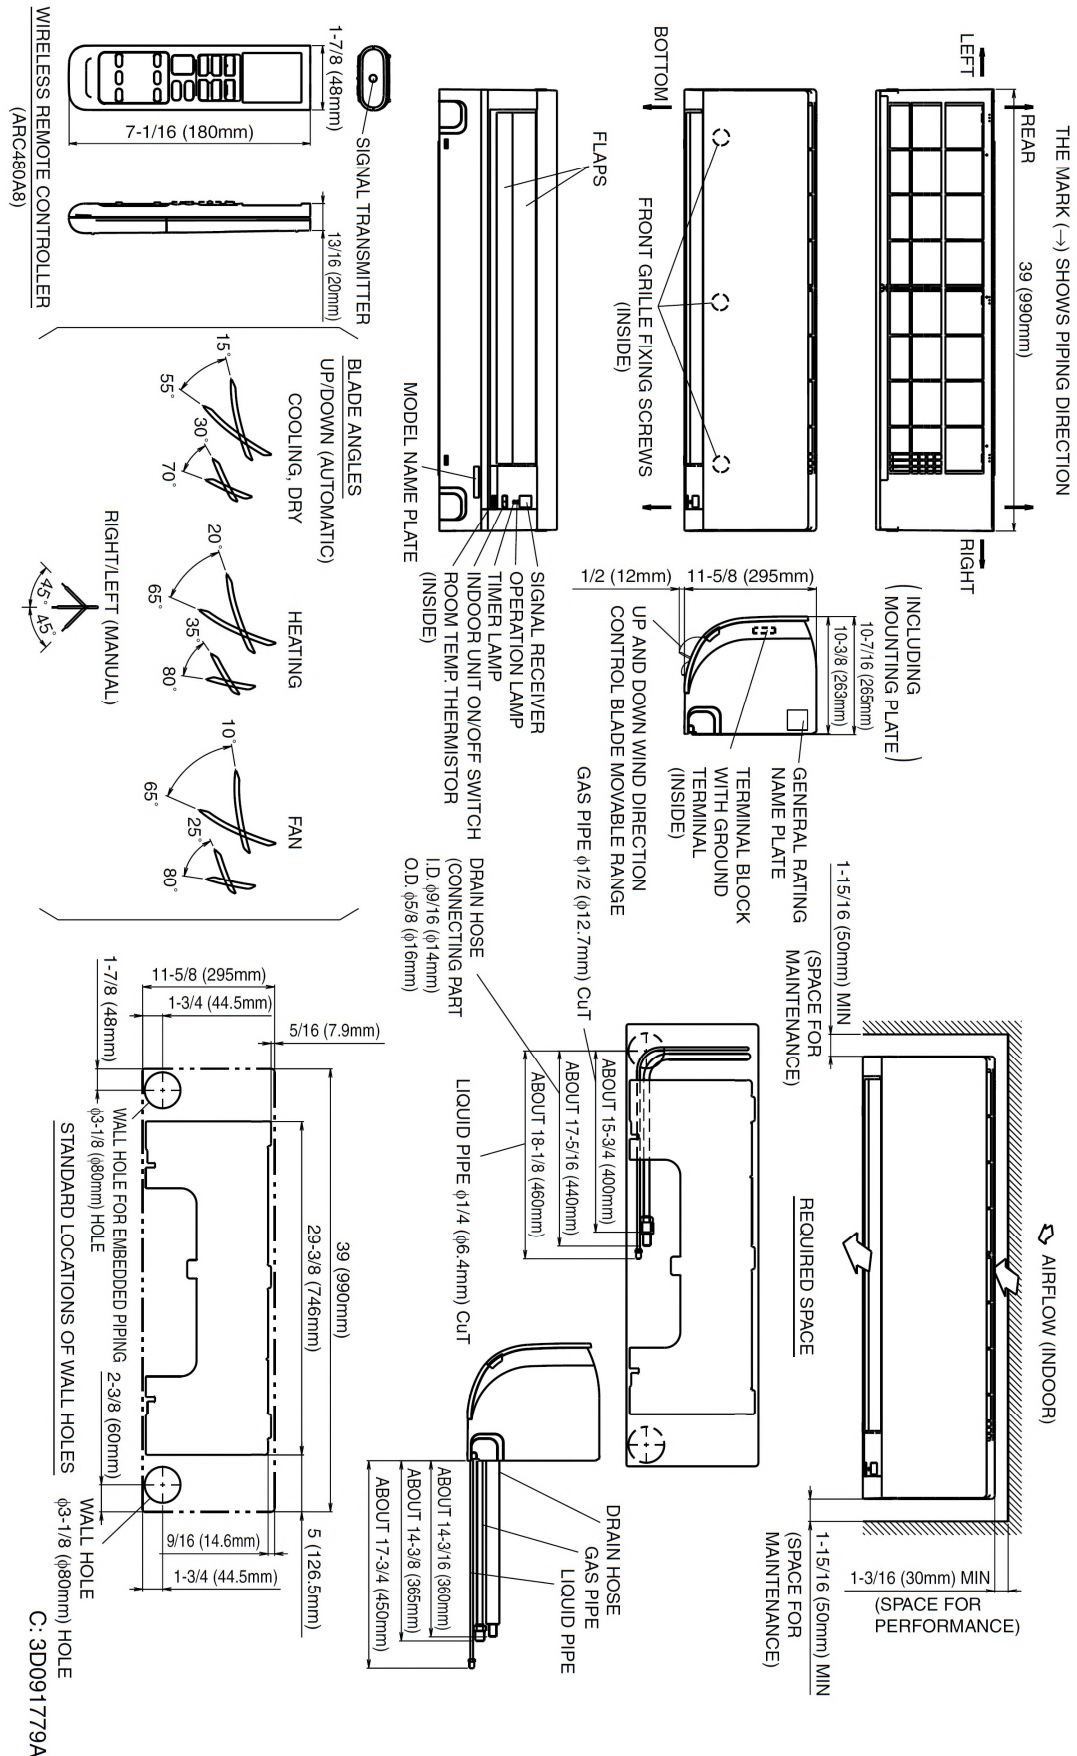


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 2 of 4

# RXL15QM VJU Dimensional Data

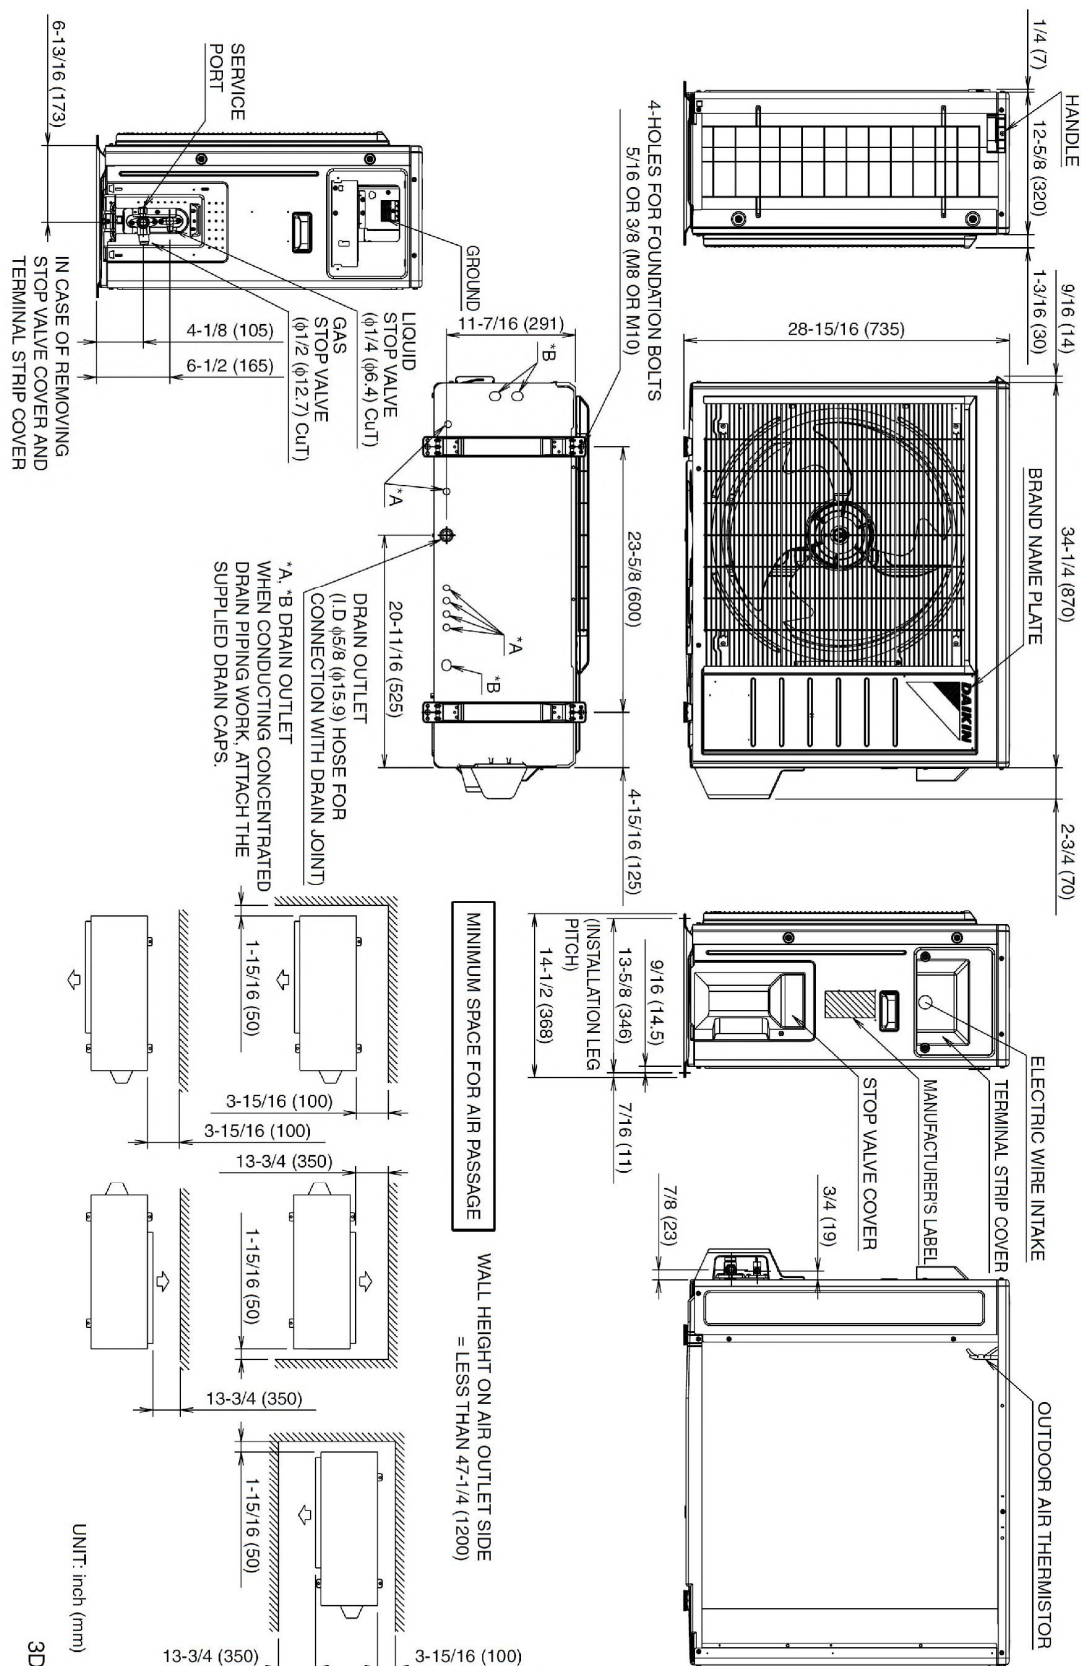

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 3 of 4

## Indoor Unit

Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter (S21 Adapter Included)
	BRC944B2-A08	Wired Remote Controller kit (Adaptor Required)
	BRCW901A08	Wired Remote Controller Cable – 25ft (Included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10ft
	KRP980B2	Adaptor for wired remote controller (15)
	KAF970A45	Titanium apatite photocatalytic air-purifying filter WITH frame
	KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S + KRP067A41	Interface Adaptor for DIII-NET

## Outdoor Unit

Included	Part Number	Description
	DACA-WB-1	Powder-Coated Wall-Mounted Bracket
	KPW063A4	Air direction adjustment grille (15)
	KEH063A4E	Daikin BML Drain Pan Heater Large (15)
	KKG063A42	Back protection wire net (15)
	KPS063A41	Snow hood (intake side plate) (15)
	KPS063A44	Snow hood (intake rear plate) (15)
	KPS063A47	Snow hood (outlet) (15)
	KKP937A4	Drain Plug for OD Unit