



**AG-3150E**

**AG-3175E**  
Plenum Rated

# AG-3150E AG-3175E Plenum Rated Primary Pan Sensors with Time Delay

The AquaGuard AG-3150E/AG-3175E's primary pan sensor is mounted directly in the auxiliary drain port of the primary drain pan. The **bonus secondary sensor** can be installed either vertically or horizontally and features a water detection LED.




For a vertical application, the **bonus secondary sensor** can be mounted on the side of the unit.

For a horizontal application, the **bonus secondary sensor** can be installed directly in the metal or plastic secondary drain pan, which allows both sensors to continuously monitor any condensate overflow in both the primary and secondary drain pans – **two sensors in one**. If any condensate overflow is detected in either drain pan, the sensor(s) will automatically shut off the system and activate an optional alarm.



**2 SENSORS IN 1  
NOW WITH TIME DELAY**

- Smart Sensor Technology with Time Delay
- Redesigned Probe Sensor for Increased Reliability
- Bonus Secondary Sensor – Two Sensors for the Price of One
- 6 Feet of Both Probe & Sensor Wire (AG-3175E Plenum Rated Probe & Sensor Wire)
- 5 Amp, 24 Volts AC Solid State Sensor with Water Detection LED Light
- Switch Can Be Normally Open or Normally Closed
- Compact Waterproof Design
- Normally Open 4th Wire for Optional External Alarm, Digital Controller or Energy Management Systems

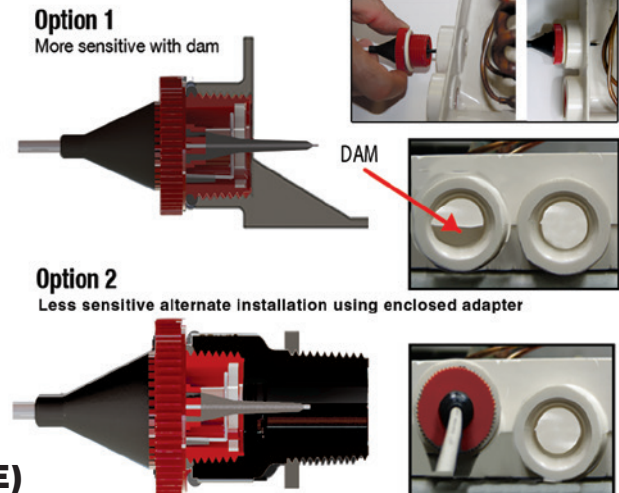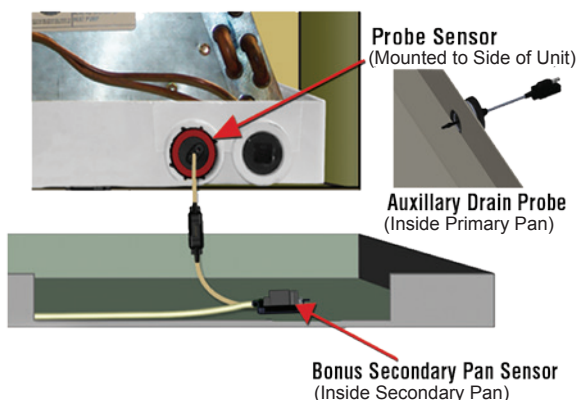

**Product Code**  
**96124 (AG3150E)**  
**96126 (AG3175E)**

US Patents 7,744,395; 8,151,580; 8,154,313; 8,561,417; 8,578,770

E-14

