

One Choice. Greater Impact.



M-SERIES™ - Optimized for Multi-family

Integrated heating and cooling systems in a tiny 3' x 3' footprint.





MagicPak™ makes every job easier.

MagicPak M-Series™ heating and cooling units are the ideal choice for multi-family buildings. The perfect combination of performance, convenience and flexibility, these self-contained units are simple to install and easy to maintain.



Concealed in a closet, the M-Series unit is easily accessible for maintenance.

Efficiency At Every Step

Plug-and play design

- Saves time and money during installation.

Self-contained design

- Reduces commissioning time at building completions.

Forward-facing components

- Make units easy to access from one location.

No outdoor elements

- Such as refrigerant lines or condensing units are needed.

Simplifying the specification & installation process.

All-in-one, compact units

- Simplify specification during the design phase.

Uniform design offers consistency

- From room to room and floor to floor, reducing installation time and costs.

Internally fastened units

- Reduce the need for external base pads, chaseways and utility connections.



1. Self-contained unit arrives.

MagicPak All-In-One™ HVAC Systems





Free Your Vision.

Compact design

- Minimizes building penetration.

Maintains indoor design aesthetic

- With closet-mounted units installed discreetly out of sight.

Customizable exterior louvers


- Extend creative possibilities, without compromising the building's façade.



2. Plug-and-play installation.



3. Installation Complete.

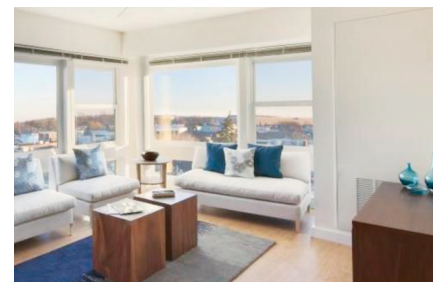




4. Out of sight, out of mind.

Inside MagicPak™

M-Series™

Specifications

- Available in 0.75-, 1-, 1.5-, 2-, 2.5- and 3-ton capacities
- Minimum 11 EER efficiency rating on all units
- Convenient toolless filter access
- Optional Climate Guard™ epoxy-coated coils
- Standard stainless-steel heat exchanger on MGE model
- Top supply and return ducting
- Factory-installed evaporator drain float switch
- Factory-installed ventilation capabilities
- 5-year limited warranty on parts
- 20-year warranty on stainless-steel heat exchanger

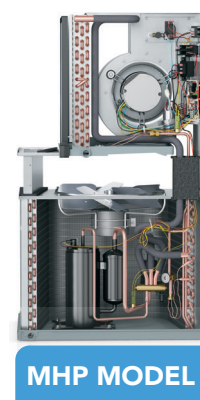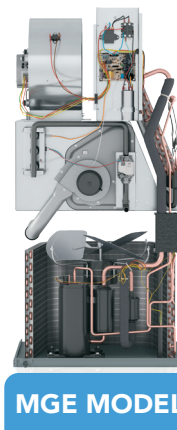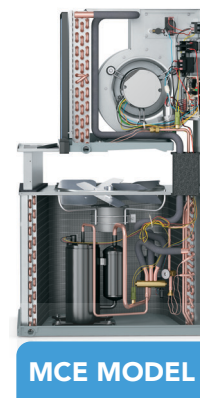

ELECTRIC/ELECTRIC | MCE MODEL

- Electric heating range of 3 - 10 KW
- Cooling range of 8,600 - 34,800 BTU/HR

GAS/ELECTRIC | MGE MODEL

- Gas heating range of 15,000 - 60,000 BTU/HR
- Cooling range of 8,600 - 34,200 BTU/HR

ELECTRIC HEAT PUMP | MHP MODEL

- A COP of 3.3; Electric heating range of 3 - 10KW
- Cooling range of 8,600 - 34,600 BTU/HR
- Heating range of 5,200 - 32,400 BTU/HR

