

Job Name:	
Tag#	



Submittal Data Sheet	CDXS18LVJU
1.5-Ton Ducted Concealed Indoor Unit	



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Indoor Specifications				
	Cooling		Heating	
	H	M	H	M
Airflow Rate (cfm)	424	388	424	388
	L	SL	L	SL
	353	297	353	297
Sound (dBA) H / M / L / SL	37 / 35 / 33 / 31		37 / 35 / 33 / 31	
Dimensions (H x W x D) (in)	7-7/8 x 35-7/16 x 24-7/16			
Weight (Lbs)	60			
Nominal Capacity (Btu/hr)	18,000			

*See Outdoor Unit for Rated Capacities

Electrical			*208/230V
	Cooling	Heating	
Running Current (Rated) (A)	.79/.79*	.79/.79*	
Power Consumption (Rated) (W)	172/172*	172/172*	


Piping	
Liquid (in)	1/4
Gas (in)	1/2
Drain (in)	25/32

Optional Accessories



Included	Part Number	Description
	AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)
	AZAI6WSPDKC	DKN Plus Interface
	DTST-ONE-ADA-A	Daikin <i>One+</i> Smart Thermostat for Ductless Products
	BRC944B2	Wired Remote Controller
	BRCW901A08	Wired Remote Controller Cable – 25ft
	BRCW901A03	Wired Remote Controller Cable – 10ft
	DACA-ARCW901P10	IR Receiver Cable, Plenum Rated, 10ft
	DACA-ARCW901P25	IR Receiver Cable, Plenum Rated, 25ft
	DACA-CP2-1	Maxi Orange Condensate Pump
	DACA-CP3-1	Mini Condensate Pump 5 gph
	KRP928BB2S	Interface Adaptor for DIII-NET
	KDT25N50	15, 18 Class Insulation kit for high humidity

External Static Pressure / Airflow Chart

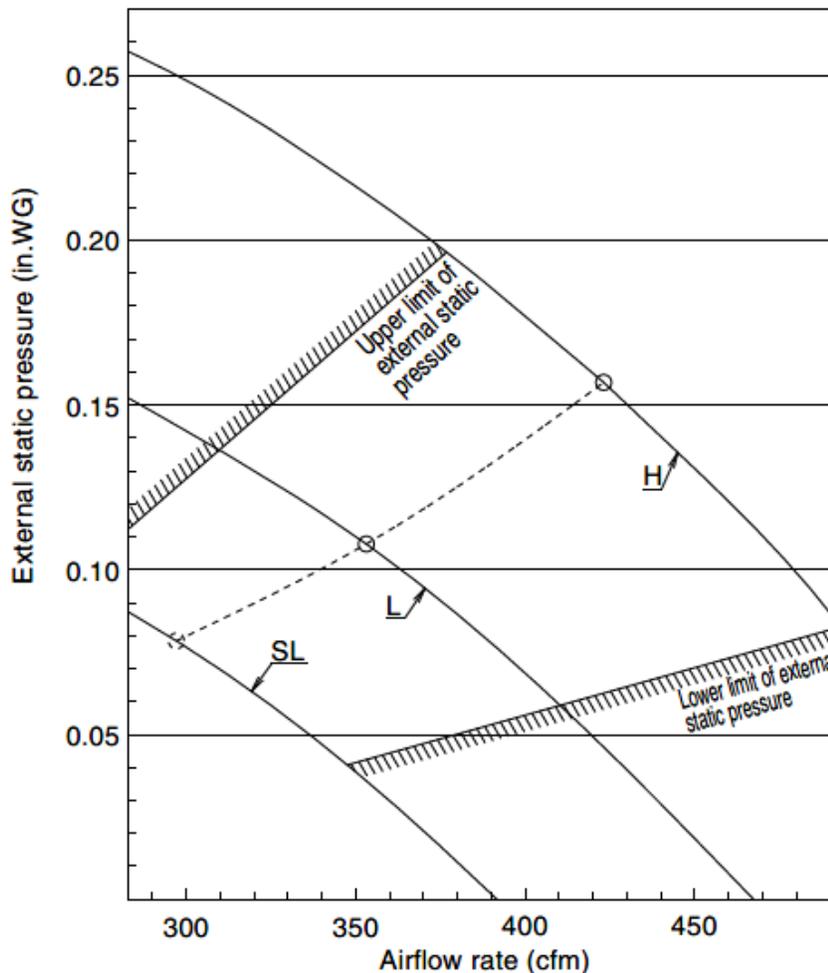

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)