

Job Name:	
Tag#	



## Submittal Data Sheet

FTX30NVJU / RK30NMVJUA

2.5-Ton Wall Mounted Cooling Only System



### Efficiency

Cooling	
SEER	17.50
EER	9.85

### Performance

Cooling (Btu/hr)	
Rated (Min/Max)	31,400 (10,200 / 31,400)
Sensible @ AHRI	21,030
Standard Operating Range	50°F – 115 °F
Extended Operating Range*	-22°F – 115 °F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB  
Outdoor: 95°F DB/75°F WB

\*With field settings and wind baffle

Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). Warranty registration not required to receive the 10-Year parts limited warranty for residential or commercial installations.

### Indoor Specifications

Airflow Rate (cfm)	Cooling	
	H	M
	890	727
	L	SL
	572	512
Sound (dBA) H / M / L / SL	53 / 47 / 40 / 37	
Dimensions (H × W × D) (in)	13-3/8 × 47-1/4 × 10-3/16	
Weight (Lbs)	38	

### Electrical

	208/60/1	230/60/1
System MCA	17	17
System MFA	20	20
Compressor RLA	16.25	16.25
Outdoor fan motor FLA	.62	.62
Outdoor fan motor W	93	93
Indoor fan motor FLA	.37	.37
Indoor fan motor W	64	64

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)  
RLA: Rated load amps (A) W: Fan motor rated output (W)

### Outdoor Specifications

Compressor	Hermetically Sealed Swing Type	
Refrigerant	R-410A	
Factory Charge (Lbs)	3.64	
Refrigerant Oil	PVE (FVC50K)	
Airflow Rate (cfm)	Cooling	
	H	2,528
Sound Pressure Level (dBA)	56	
Dimensions (H × W × D) (in)	28-15/16 × 34-1/4 × 12-5/8	
Weight (Lbs)	133	


### Piping

Liquid (in)	1/4
Gas (in)	5/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	98.4
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.32

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


# FTX30NVJU Dimensional Data

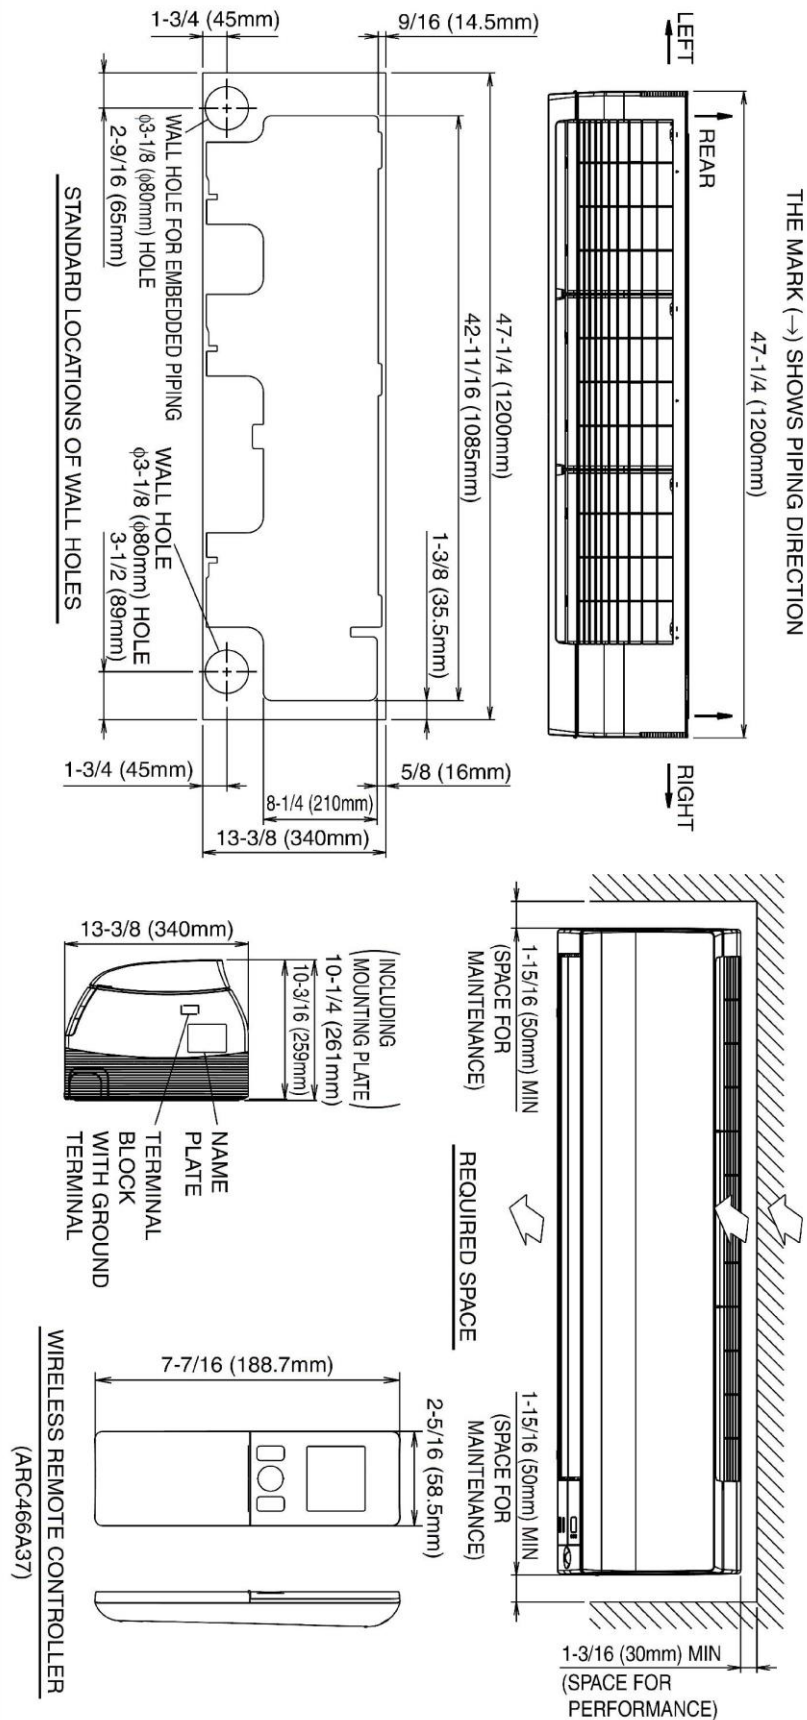

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

# RK30NMVJUA Dimensional Data

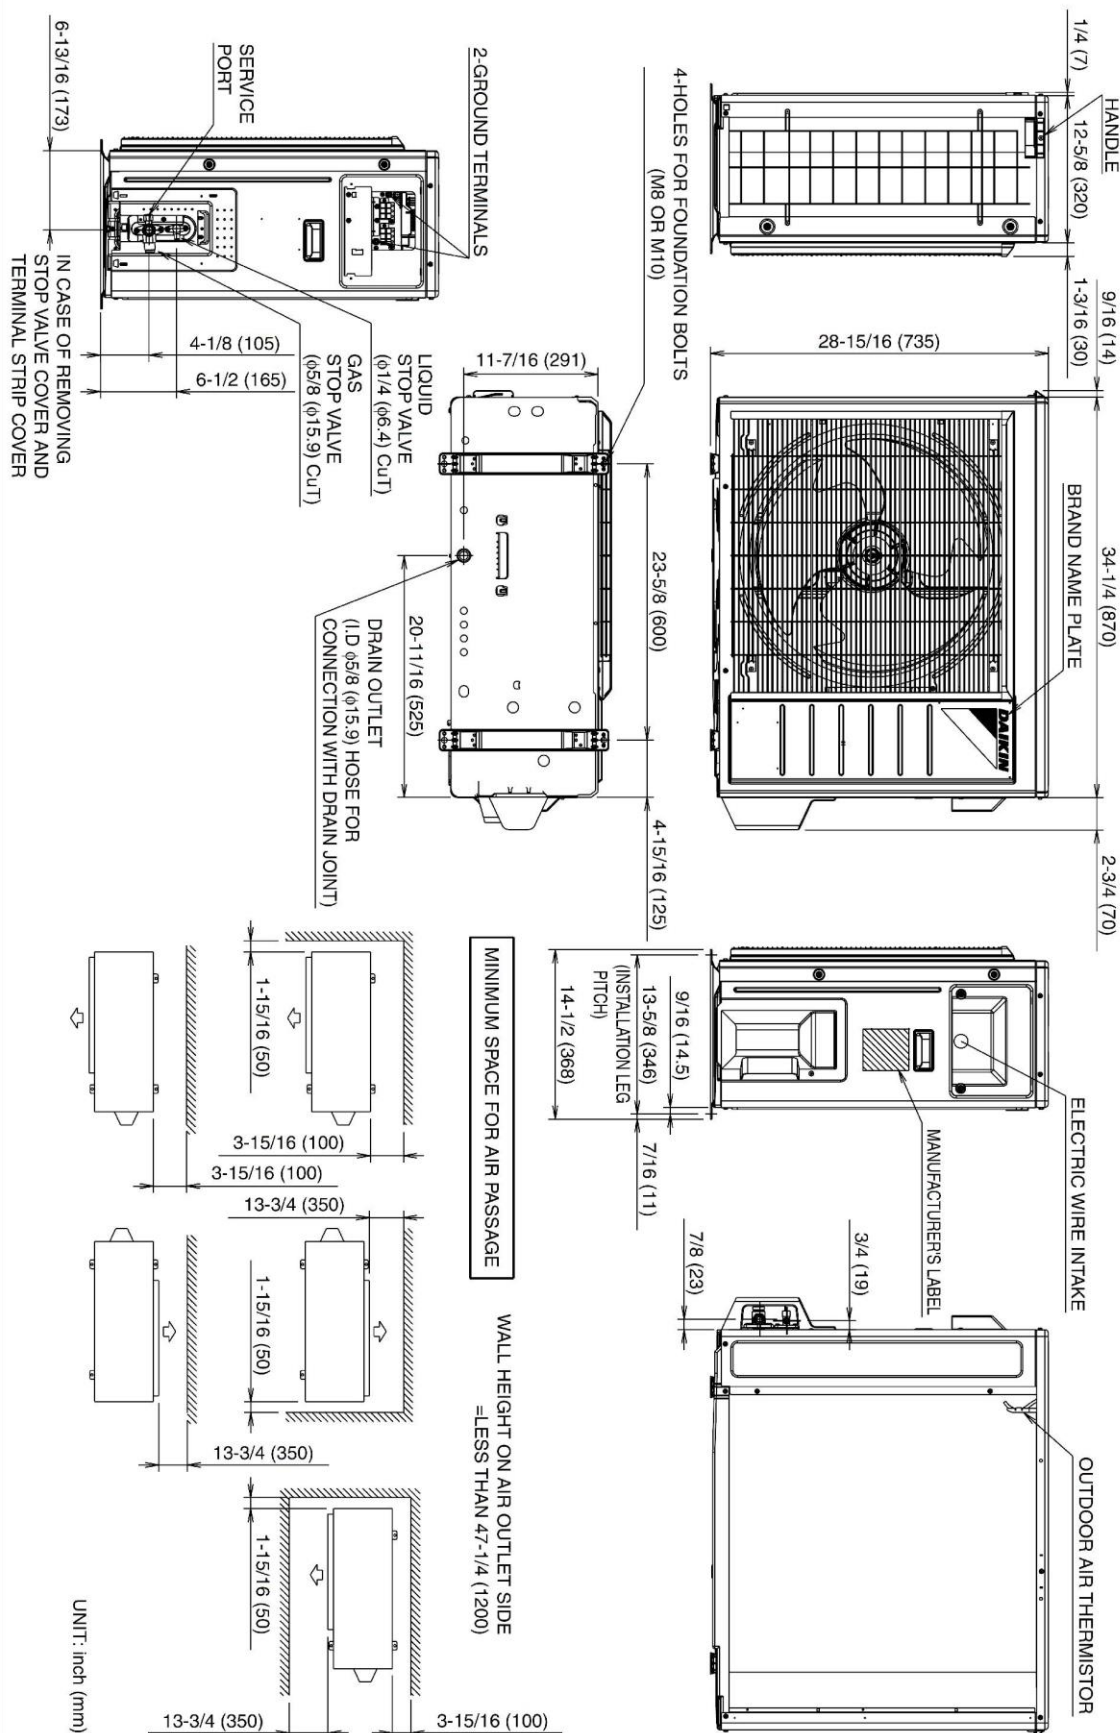

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Indoor Unit		
Included	Part Number	Description
	AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)
	AZAI6WSPDKC	DKN Plus Interface
	DTST-ONE-ADA-A	Daikin <i>One+</i> Smart Thermostat for Ductless Products
	BRC944B2	Wired Remote Controller
	BRCW901A08	Wired Remote Controller Cable – 25ft
	BRCW901A03	Wired Remote Controller Cable – 10ft
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S	Interface Adaptor for DIII-NET

Outdoor Unit		
Included	Part Number	Description
	KPW063B4	Air Adjustment Grille (RX & RK)
	KKG063A42	Back protection wire net