




Chiltrix Motorized 3 Way Valve

Model #	Size/Thread	Max Pressure	Voltage	Power Consumption	Switching Time
DN25/G1/G3	1"	145 psi	220VAC±15% 50/60hz	5W	16s
DN32/G1/G3	1.25"				
Temp Range	Valve Material	Actuator Torque	Seal Type	Pressure Drop Coefficient	Weight (Actuator and Valve)
23°F - 194°F	Forged Brass	3.5 Nm / 2.58 lb.-ft.	EPDM and PTFE	DN25= 19 Cv DN32=20 Cv	2 Lbs. 2.8 Lbs

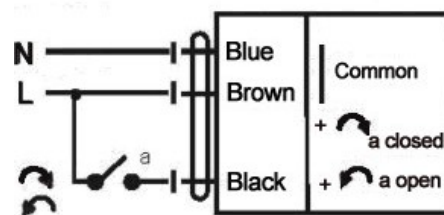

Control wire : BLACK wire
 Power wire(L) : BROWN wire
 Common port(N) : BLUE wire