

Job Name:	
Tag#	



Submittal Data Sheet

FTXS36LVJU / RKS36LVJU

3-Ton Wall Mounted Cooling Only System



Complete warranty details available from your local dealer or at www.daikincomfort.com. Warranty registration not required to receive the 10-Year parts limited warranty for residential or commercial installations.

Indoor Specifications

Airflow Rate (cfm)	Cooling	
	H	M
	770	635
	L	SL
	519	473
Sound (dBA) H / M / L / SL	49 / 45 / 40 / 37	
Dimensions (H x W x D) (in)	13-3/8 x 47-1/4 x 9-7/16	
Weight (Lbs)	38	

Outdoor Specifications

Compressor	Hermetically Sealed Swing Type	
Refrigerant	R-410A	
Refrigerant Oil	PVE (FVC50K)	
Airflow Rate (cfm)	Cooling	
	H	2,627
Sound Power Level (dBA)	68	
Dimensions (H x W x D) (in)	38-15/16 x 37 x 12-5/8	
Weight (Lbs)	179	

Efficiency

Cooling	
SEER	17.9
EER	8.35

Performance

Cooling (Btu/hr)	
Rated (Min/Max)	36,000 (10,200 / 36,000)
Sensible @ AHRI	22,890
Operating Range	50 – 115 °F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

Electrical

	208/60/1	230/60/1
System MCA	19.5	19.5
System MFA	20	20
Compressor RLA	18.9	18.4
Outdoor fan motor FLA	.39	.35
Outdoor fan motor W	200	200
Indoor fan motor FLA	.37	.34
Indoor fan motor W	64	64

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)
RLA: Rated load amps (A) W: Fan motor rated output (W)

Piping

Liquid (in)	3/8
Gas (in)	5/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	98.4
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32
Additional Charge of Refrigerant (oz/ft)	.54


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Creation Date: June 2017

Page 1 of 4

FTXS36LVJU Dimensional Data

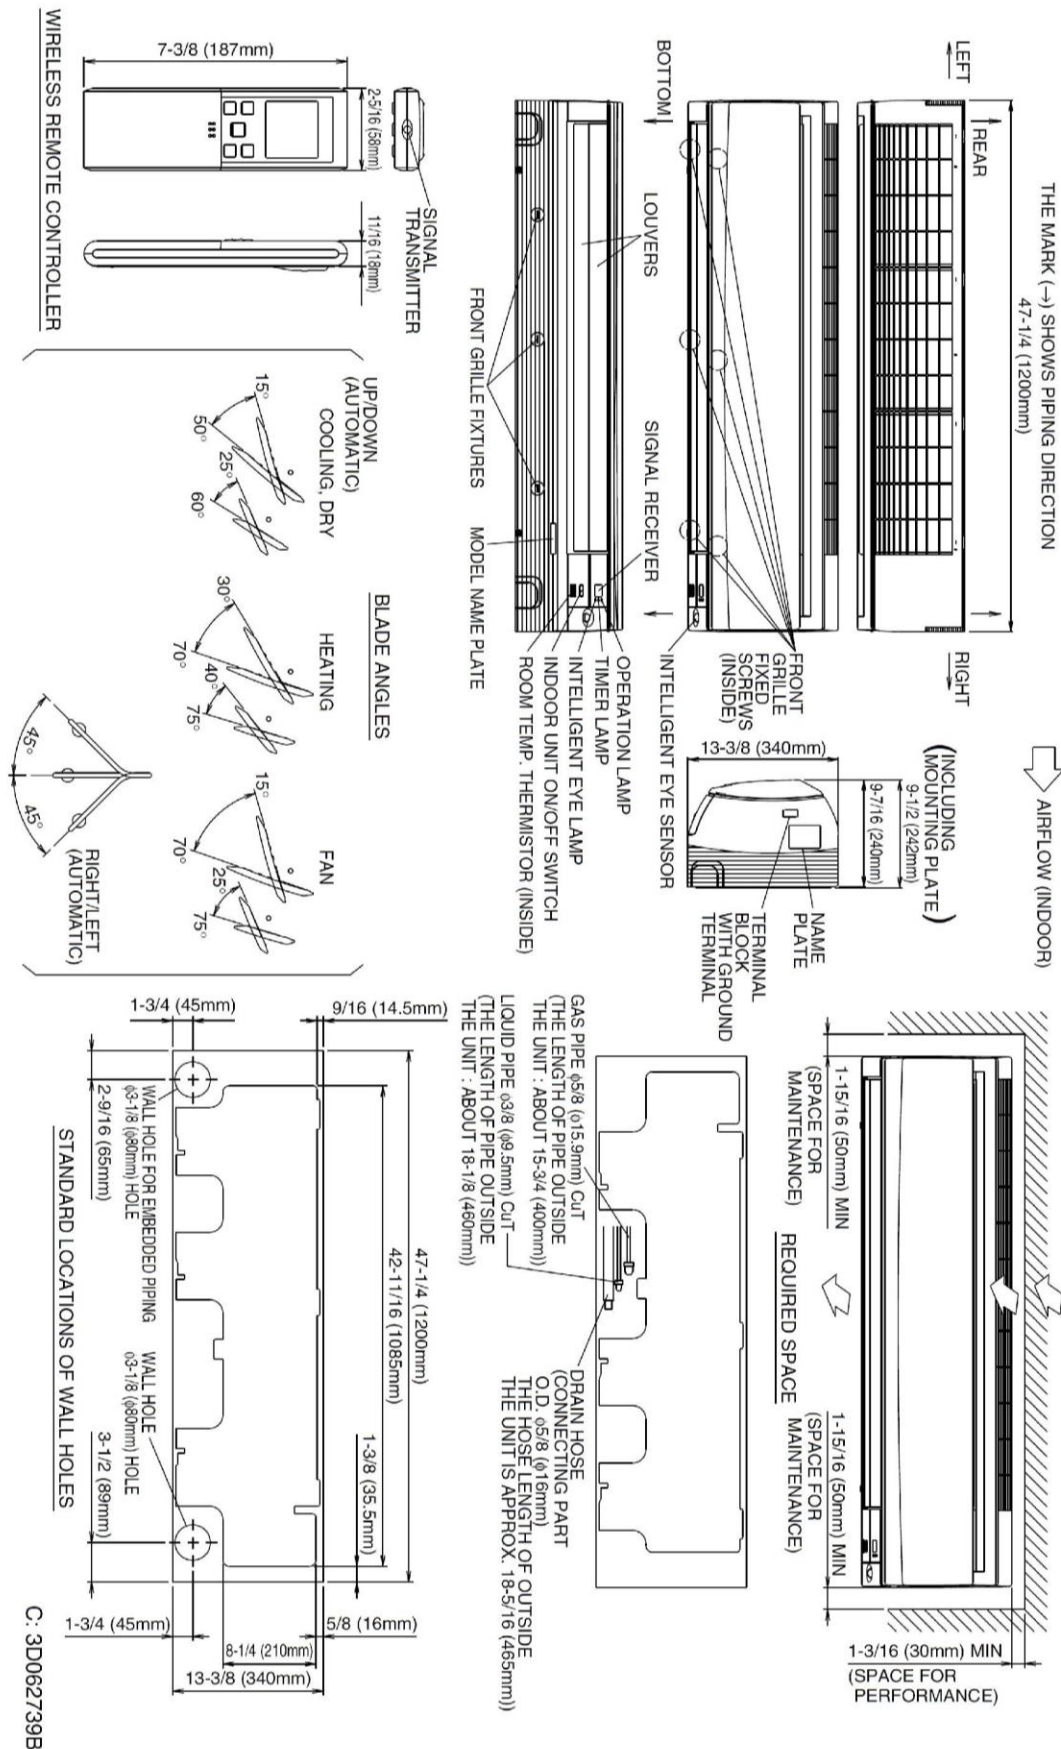


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Creation Date: June 2017

Page 2 of 4

RKS36LVJU Dimensional Data

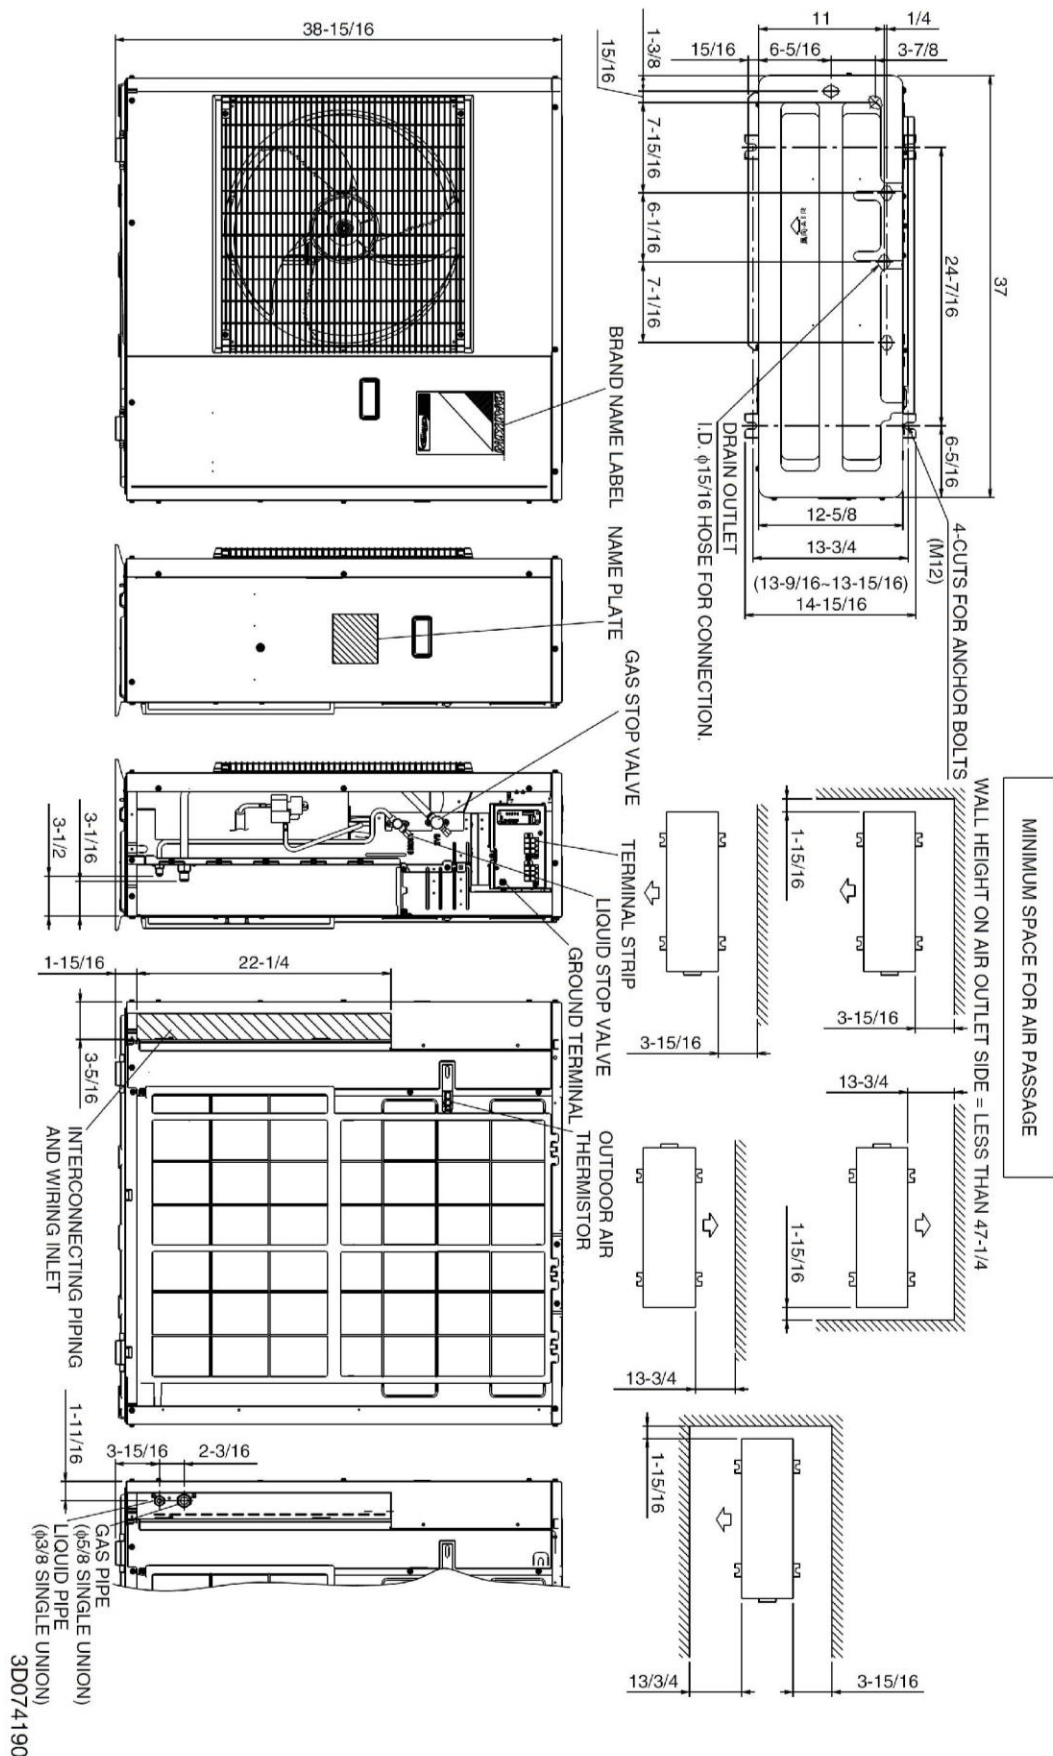

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Creation Date: June 2017

Page 3 of 4

Indoor Unit – Controller Required		
Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller
	BRCW901A08	Wired Remote Controller Cord - 3m
	DACA-BRCW901P10	Remote Controller Cable, Plenum Rated, 10 ft
	DACA-BRCW901P25	Remote Controller Cable, Plenum Rated, 25 ft
	DACA-TS1-1	Daikin ENVi Intelligent Thermostat Kit
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S	Interface Adaptor for DIII-NET

Outdoor Unit		
Included	Part Number	Description
	KPW5E112	Air Adjustment Grille
	KKG063A42	Back protection wire net
	2F018535-2	Ultra Low Ambient Kit