




APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

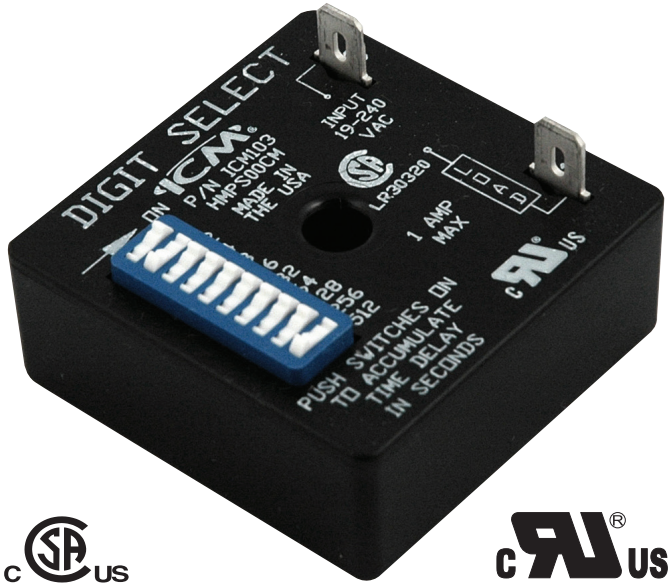

OVERVIEW

When power is applied to the input, the time delay begins. After the time delay is complete, the load energizes.

REPLACES

- **A-1:** 7061
- **Gemline:** 1C213
- **Ice-O-Matic:** TD3001A
- **Mars:** 32394, 32396
- **Robertshaw:** 3310-068
- **Supco:** TMF-19, TMF-8

FEATURES

- ✓ Highly precise digital timing
- ✓ Switch-settable time delays
- ✓ Ideal for ice machine applications
- ✓ Universal voltage operation
- ✓ Repeat accuracy .5% over voltage and temperature range

SPECIFICATIONS

- **Voltage:** 18-240 VAC, 1.0 amp, 10 amp inrush, 40 mA holding current
- **Frequency:** 50/60 Hz
- **Switch-settable delays:** Range from 1-1,023 seconds
- **Voltage drop:** 2.5 V @ 1 amp