



**Compressor Lockout,  
Integral Low Voltage  
Brownout Protection**

**ICM204/205/206**

**DELAY ON BREAK**

**BLPS**

- 3 or 5 minute fixed or 10 minute adjustable delay
- Works with anticipator thermostats

### MODE OF OPERATION

With application of power, the load is energized. When the thermostat opens or there is a loss of power, the load is de-energized and the delay period begins. The compressor will not start again during the delay period. ICM Models 204/205/206 provide true thermostat interruption protection, even in the presence of a trickle current.

### SPECIFICATIONS

#### Input

- **Voltage:** 18-30 VAC
- **Frequency:** 50-60 Hz

#### Output

- **Output Ratings:**
  - **Maximum:** 1.5 amps
  - **Minimum:** 40 mA
  - **Inrush:** 15 amps


#### Time Delay

- 3 or 5 minute fixed, 10 minute adjustable

### INSTALLATION

1. Disconnect power.
2. Connect terminals as shown in the wiring diagram below.
3. Select desired time delay (adjustable models only).
4. Reapply power, check operation.

### TIMING DIAGRAM

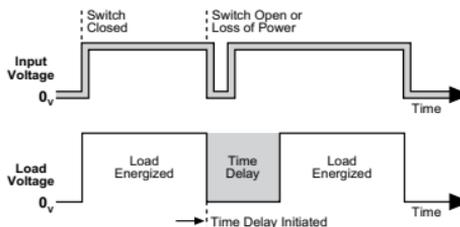

### WIRING DIAGRAM

