

### SPECIFICATIONS

**INPUT VOLTAGE:** 19-30VAC 60 Hz  
*Supplied via bus cable from BMPlus3000.*

**CURRENT DRAW:** Max 7 VA @ 24VAC.


**OVER-CURRENT PROTECTION:** 4.0 amp  
or 96 VA. *Protected via BMPlus3000.*

**WIRING:** 18 gauge Solid copper wire. Do not  
use Stranded or Shielded Cable.

**TEMPERATURE:** -20° to 160°F (-29° to  
71°C).

**HUMIDITY:** 0% - 95% RH Non-Condensing.

### DIMENSIONS:

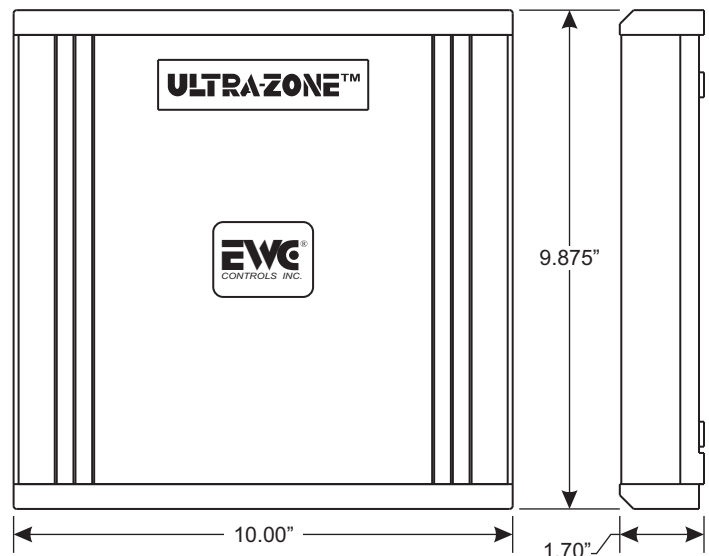

### FEATURES

#### **NUMBER OF ZONES:**

Provides 2 additional zones for the Model BMPlus3000. A total of 2 Model XM-2 expansion Modules can be utilized to add up to 4 additional zones.

#### **COMPATIBLE THERMOSTATS:**

Any single stage Heat/Cool Thermostat or 2 Stage Heat, 1 Stage cool Heat Pump Thermostat.

#### **COMPATIBLE DAMPERS:**

EWC Models URD, ND, RSD and SID. Any 24vac 3 Wire or 2 Wire damper.

#### **ADDITIONAL FEATURES:**

\*On Board LED's indicate system operation.

#### **REQUIREMENTS:**

Must be used to expand a current BMPlus3000 or BMPlus5000 system. Cannot be used as a Stand-alone solution or with older BM2000 or BMPlus2000 systems.

Excellence Without Compromise



385 Hwy. 33  
Englishtown, NJ 07726  
Ph: 800-446-3110  
Fx: 732-446-5362

P/N 090377A0143 REV. A

Copyright © EWC Controls 2006-2008 All Rights Reserved

### **SUBMITTAL FORM**

SUBMITTED BY: \_\_\_\_\_

JOB: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

LOCATION: \_\_\_\_\_