

5

4



3

2

1

C

B

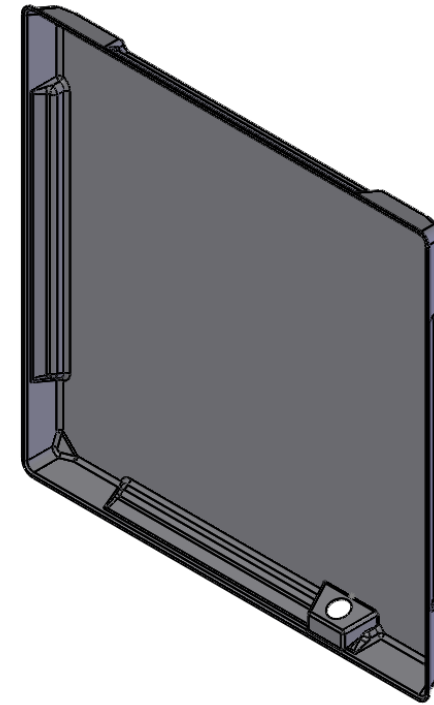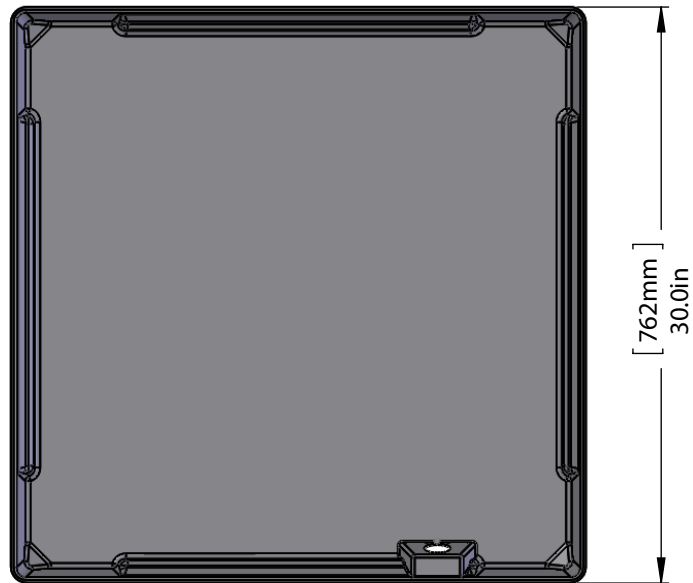

C

B

NOTES:

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm .032$
ANGULAR: MACH $\pm .5^\circ$ BEND $\pm 2^\circ$
TWO PLACE DECIMAL $\pm .010$
THREE PLACE DECIMAL $\pm .005$

INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y14.5, 1994

| ENGINEERING | NAME | DATE |
|-----------------|------|----------|
| DRAWN BY ENG. | DS | 10/13/09 |
| CHECKED BY ENG. | JK | 10/13/09 |
| ENG APPR. | CC | 10/13/09 |
| MFG APPR. | CC | 10/13/09 |

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
RECTORSEAL.
ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF RECTORSEAL IS
PROHIBITED.



2601 Spenwick Drive,
Houston, TX 77055
800-231-3345

TITLE:

AG-T 30x30 SPECIFICATION SHEET

SIZE
A

SCALE: 1:10

SHEET 1 OF 1

A

5

4

3

2

1