



For: File Resubmit Approval Other _____

UPC-67TA/68T Slotted Outlet Kit

Job Name:	Location:
Date:	Tag #:
Architect:	Engineer:
Mechanical:	Distributor:
Rep:	
(Company)	(Project Manager)

 <p>UPC-68T</p>	 <p>UPC-67TA</p>	<p>Features</p> <ul style="list-style-type: none"> • Available in 90 degree (UPC-67TA) or straight (UPC-68T) configurations. • Compatible with any Twist-Fit System component. • Outlet faceplate can be painted to match any décor. 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: black; color: white;"> <th style="padding: 5px;">Available Models</th> </tr> <tr> <td style="padding: 5px;">UPC-67TA</td> </tr> <tr> <td style="padding: 5px;">UPC-68T</td> </tr> </table>	Available Models	UPC-67TA	UPC-68T
Available Models						
UPC-67TA						
UPC-68T						

General Data:

Recommended Airflow	15-35 CFM (25.5 – 59.5 m ³ /hr)
Recommended Number of Outlets	7/nominal ton
Fire Rating	UL-94 HB
Trim Plate Material	White ABS Plastic
Compatible Duct Size	2-inch
Wall Thickness	3/8 to 3/4in (0.95 to 1.91cm)
Weight	0.8lbs (0.36kg)
Mounting Bracket Length	14 to 24in (356 to 610mm)
Rough-In Hole Size	1.00in x 9.25in (25m x 235mm)

Parts Included:

- (1) Insulated slotted outlet
- (1) Decorative faceplate with fasteners
- (1) Winter shut-off plug

Model Number Key (see above for available models):

UPC	67	T	A
Unico Part Code	Outlet Angle 67 – 90 deg. 68 – Straight	Connection Type T – Twist-Fit System	Revision (blank) – None

UPC-67TA/68T

Job Name:


Location:

Date:


Tag #:

DIMENSIONS


Faceplate

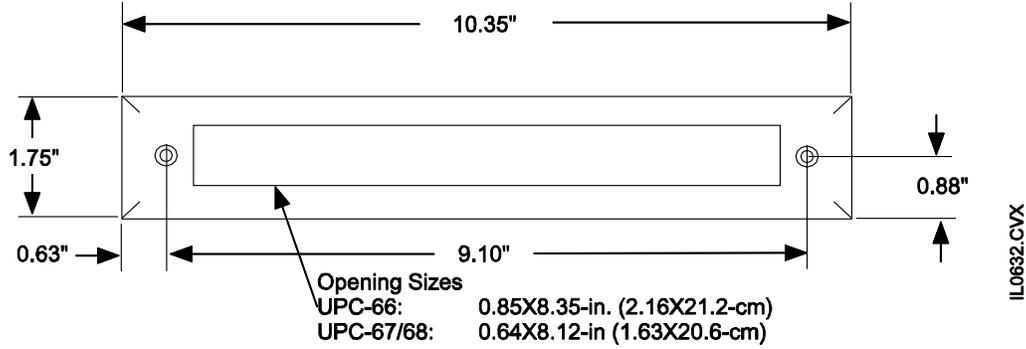

UPC-67TA

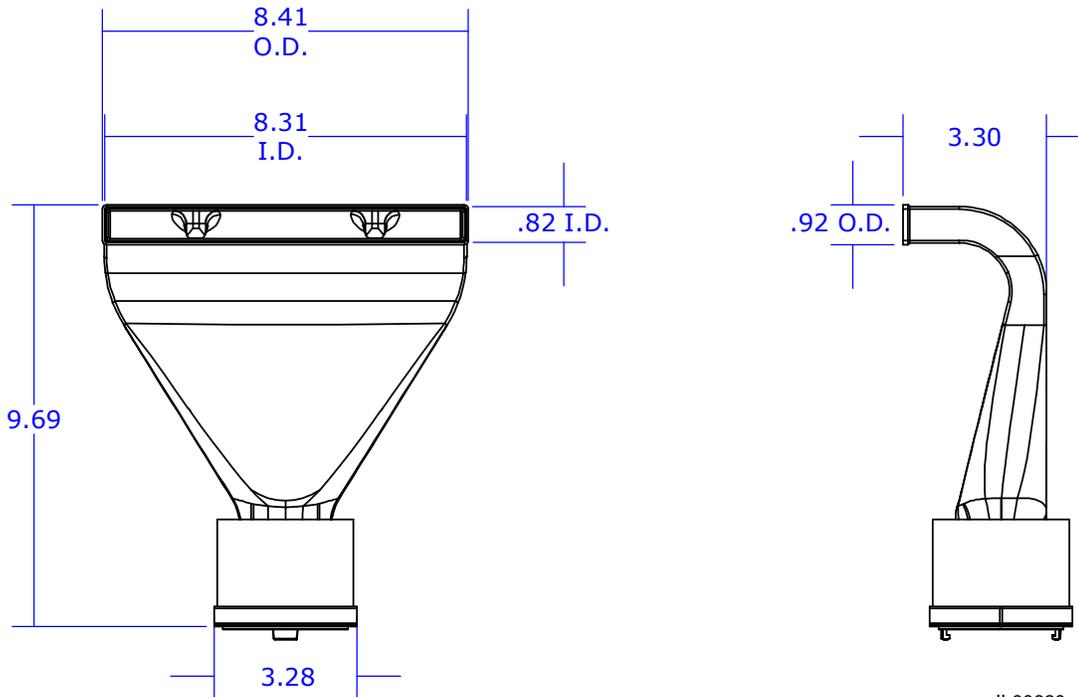

UPC-68T

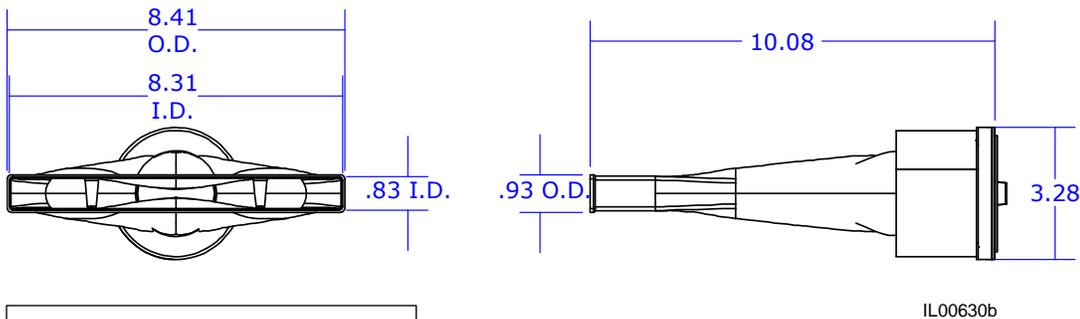

Unico, Inc.
<https://www.unicosystem.com>
314-481-9000
800-527-0896
sales@unicosystem.com