



FIRST CO.  
P.O. BOX 270969 - DALLAS, TEXAS 75227  
PH. (214) 388-5751 | FAX (214) 388-2255  
WWW.FIRSTCO.COM


# WCX14-CB Series

**NEW!!** LOWER HEIGHT CABINET DESIGN

WCX14-CB

1-2 TONS

14 SEER!

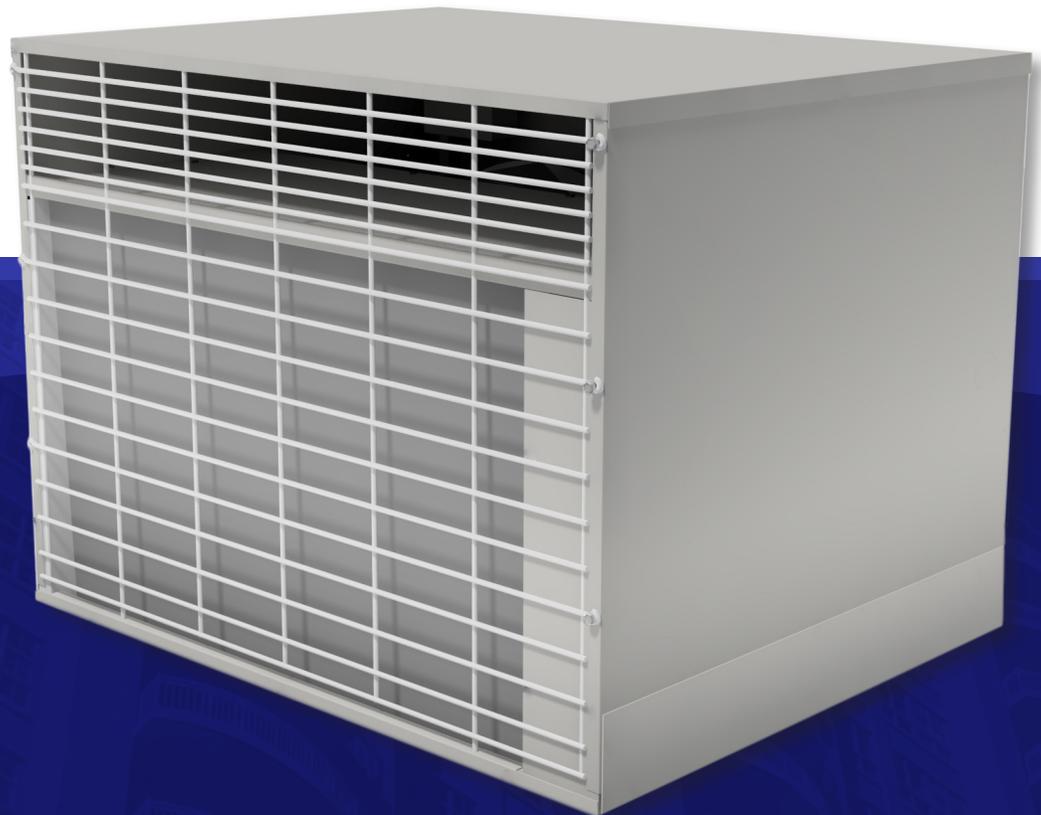

# WCX14-CB

## FEATURES:

- Up to 14 SEER with matching Air Handler
- Smaller height for applications where height is a issue.
- Factory charged with R-410A refrigerant (charge will need to be field-adjusted)
- Unique cabinet design-unit side panels fit inside rather than outside the base pan to improve water containment on the sides of the cabinet
- Extra-high efficiency scroll R-410A compressor
- High pressure switch
- The more efficient backward curved fan - Moves more air over the condenser coil at lower operating watts than standard type blower.
- Sloped base pan - Positive water drainage from the unit to the building exterior
- Plastic coated coil guard
- Filter/drier
- Direct replacement for older WCU-CB


## THROUGH-THE-WALL VS CONVENTIONAL CONDENSING UNITS

- **Lower Installation Costs** - WCX14 condensing units install on the same floor as the apartment, town home, or condominium, resulting in considerable first cost savings in refrigerant, refrigerant piping, and electrical wiring compared to condensing units installed on the ground or roof.
- **Easier to Service** - Being located on the same floor as the apartment, town home, or condominium, service and routine maintenance of the WCX14 is much easier and can be performed by one person.
- ✓ Eliminates theft problems
- ✓ No costly landscaping needed to hide the units
- ✓ No condensing unit support pads required
- ✓ No additional roof support expenses
- ✓ No chase ways to roof or ground needed for refrigerant lines

## OPTIONAL ACCESSORY:

- Architectural Louvered Grill

# WCX14-CB

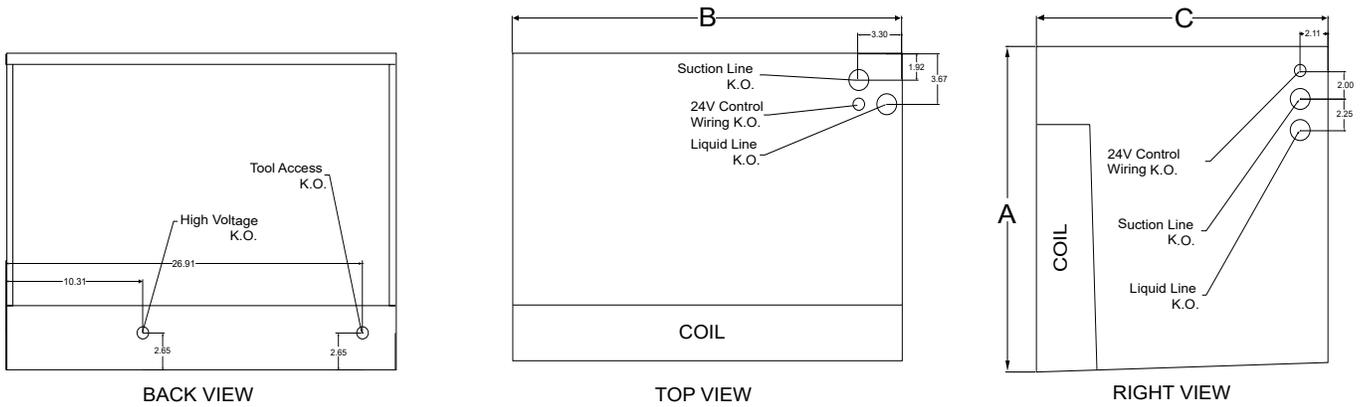

Electrical Data 208/240-1ph-60hz						
Unit Model	Compressor		Condenser Fan		MCA	MOP
	LRA	RLA	FLA	HP		
12WCX14-CB	29	5.6	2.8	1/2	9.8	15
18WCX14-CB	56.3	9	2.8	1/2	14.1	20
24WCX14-CB	62.9	10.9	2.8	1/2	16.4	25

Physical Dimensions	Capacity	A	B	C	LIQ/SUCT. Line Connections (Sweat)	Approx. Ship Weight
12WCX14-CB	11,700	23	29-1/2	22	3/8 O.D / 3/4 O.D.	125 lbs
18WCX14-CB	18,000	23	29-1/2	22		134 lbs
24WCX14-CB	23,000	23	29-1/2	22		140 lbs

Capacities and SEER Ratings for various matched air handlers and fan coils can be found on the First Co. website at [www.firstco.com](http://www.firstco.com) under ratings.

Optional Accessories		
G200CB	Anodized aluminum architectural grill	23 X 29-1/2



Anodized Aluminum Architectural Grill





FIRST CO.  
P.O. BOX 270969 - DALLAS, TEXAS 75227  
PH. (214) 388-5751 | SALES@FIRSTCO.COM  
WWW.FIRSTCO.COM