

12 SEER

GAS HEAT | 80% AFUE



**NATIONAL
COMFORT
PRODUCTS**


HEATING & A/C EQUIPMENT

Thru-the-Wall Comfort for all types of Multi-Family Construction

Coming Soon!

2.5 Ton Comfort Pack

With All The Same Great Reliable Comfort Pack Features

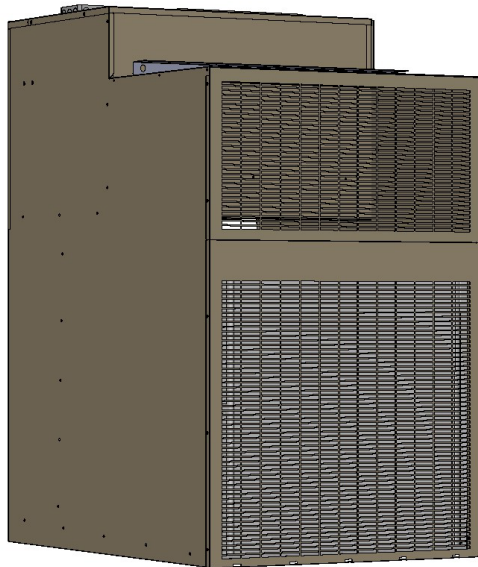

Comfort Pack Non Condensing Furnace 2.5 Ton
Shown with Factory Installed,
Pre-Painted Stamped Exterior Grille

Features

- Fits existing Comfort Pack Wall Sleeve
- Adjustable 5 Speed DC Indoor Motor
- Self-Contained Heating and Cooling Unit
- Precharged and Prewired
- Ships with standard Pre-Painted Stamped Exterior Grille

Cooling System

- Slide-Out Universal Cooling Chassis provided with polarized molex plug connections
- Easy Access Coremax Service Ports
- R-410A High Efficiency Compressor
- 2.5 Ton Cooling Capacity
- TXV installed for optimum performance
- Standard Secondary Drain Connection

Heating

- 80% AFUE Slide-Out Furnace with 409 Stainless Steel Heat Exchanger
- Up to 51,200 BTUH Heating Capacity Output
- Diagnostic LEDs and flame visible through sight glass on Furnace Door
- Sealed Combustion Chamber

Performance Data | 12 SEER – 80% AFUE

| Models | Nominal Cooling Tons | Cooling BTU | Heating BTU Input | Heating BTU Output |
|------------|----------------------|-------------|-------------------|--------------------|
| CPG42938-T | 2.5 | 27,900 | 38,000 | 30,400 |
| CPG42951-T | 2.5 | 27,900 | 51,000 | 40,800 |
| CPG42964-T | 2.5 | 27,900 | 64,000 | 51,200 |

Go Thru-the-Wall



HEATING & A/C EQUIPMENT

National Comfort Products

A Division of National Refrigeration and Air Conditioning Products, Inc.

539 Dunksferry Road • Bensalem, PA 19020-5908
(800) 523-7138 • Fax (215) 639-1674

www.nationalcomfortproducts.com

Comfort Pack 2.5 Ton Gas Non Condensing Furnace


| Electrical Data | | | | | | | | | | | |
|-----------------|--------------|------------|------|-------------------|-----|-----|---------------------|-----|------------|----------------------|-------------------------------|
| Models | Voltage | Compressor | | Outdoor Fan Motor | | | Indoor Blower Motor | | Total Amps | Minimum Circuit Amps | Maximum Overcurrent Protector |
| | | RLA | LRA | HP | FLA | LRA | HP | FLA | | | |
| CPG42938-T | 208-230/60/1 | 13.5 | 72.5 | 1/4 | 2.4 | – | 1/2 | 3.9 | 19.8 | 23.2 | 35 |
| CPG42951-T | 208-230/60/1 | 13.5 | 72.5 | 1/4 | 2.4 | – | 1/2 | 3.9 | 19.8 | 23.2 | 35 |
| CPG42964-T | 208-230/60/1 | 13.5 | 72.5 | 1/4 | 2.4 | – | 1/2 | 3.9 | 19.8 | 23.2 | 35 |

| Air Flow Data | | | | | | |
|---------------|-----------|--------------------|-----|-----|-----|-----|
| Models | Speed Tap | ESP (in. wc) / CFM | | | | |
| | | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 |
| CPG42938-T | 1 | 960 | 940 | 920 | 900 | 880 |
| | 2 | 775 | 745 | 730 | 710 | 685 |
| | 3 | 660 | 640 | 605 | 590 | 570 |
| | 4 | 575 | 550 | 525 | 500 | 465 |
| | 5 | 465 | 445 | 405 | 370 | 345 |
| CPG42951-T | 1 | 930 | 900 | 880 | 860 | 840 |
| | 2 | 800 | 775 | 750 | 725 | 705 |
| | 3 | 690 | 665 | 635 | 615 | 585 |
| | 4 | 605 | 575 | 540 | 515 | 485 |
| | 5 | 435 | 400 | 365 | - | - |
| CPG42964-T | 1 | 930 | 900 | 880 | 860 | 840 |
| | 2 | 800 | 775 | 750 | 725 | 705 |
| | 3 | 690 | 665 | 635 | 615 | 585 |
| | 4 | 605 | 575 | 540 | 515 | 485 |
| | 5 | 435 | 400 | 365 | - | - |

NOTE: All units are set from factory based on a .1 static. Setpoint may be different for heating and cooling.

All specifications are subject to change without notice.

Comfort Pack 2.5 Ton Gas Non Condensing Furnace

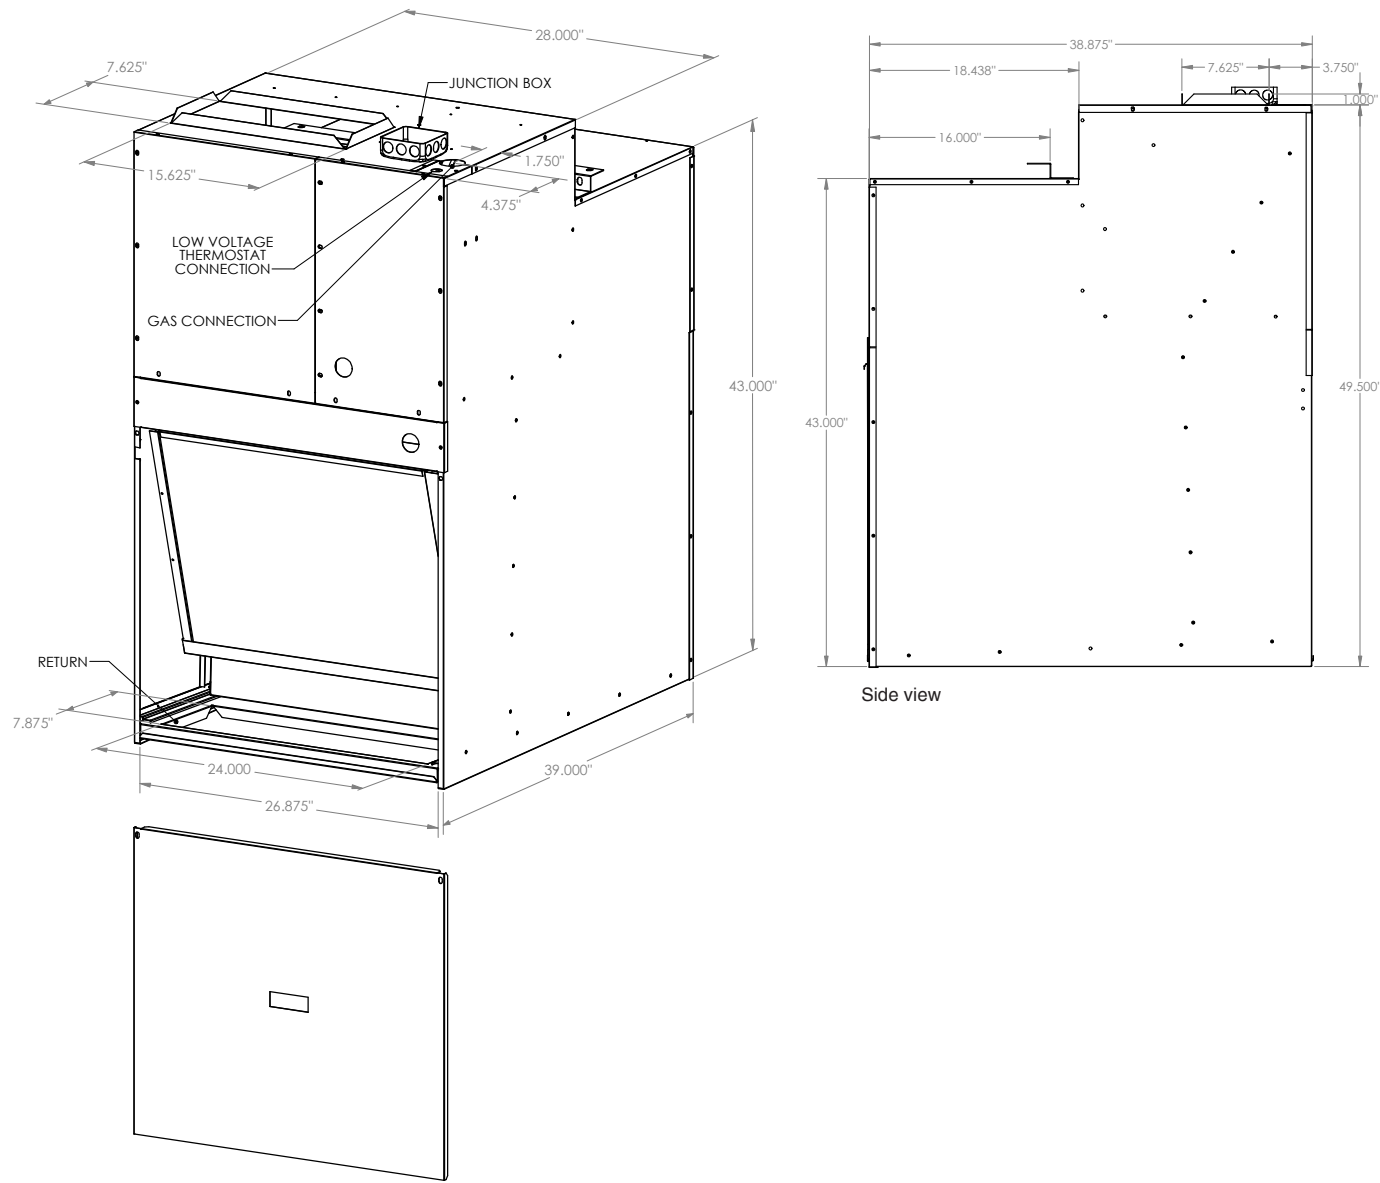

All specifications are subject to change without notice.



National Comfort Products
A Division of National Refrigeration and Air Conditioning Products, Inc.
539 Dunksferry Road • Bensalem, PA 19020-5908
(800) 523-7138 • Fax (215) 639-1674
www.NationalComfortProducts.com

Spec CPG-T 2.5 Non Condensing Furnace 3/2021