

Job Name:

Schedule Reference:

Date:



GENERAL FEATURES

- Dual set point functionality
- High external static pressure capabilities
- Ducted fan coil supports multiple configurations for flexible installation
- Built-in condensate pump; lifts to 27-9/16 inches
- Suitable for use in air handling spaces in accordance with Section 18.2 of UL 1995 4th Edition

OPTIONS

- ☐ Condensate Pump.....BlueDiamond X87-711/721; 115/230V
- ☐ Condensate Pump.....Sauermann SI30-115/230; 115/230V
- ☐ Filter Box (Includes 2" MERV 13 filter).....FBH2-1
- ☐ CN24 Relay Kit.....CN24RELAY-KIT-CM3

SPECIFICATIONS

Capacity*

Cooling.....	15,000 Btu/h
Heating.....	17,000 Btu/h

Power

Power Source.....	208 / 230V, 1-phase, 60Hz
-------------------	---------------------------

Power Consumption*

Cooling.....	0.27 / 0.28 kW
Heating.....	0.25 / 0.26 kW

Current*

Cooling.....	1.32 / 1.25 A
Heating.....	1.21 / 1.14 A

Minimum Circuit Ampacity (MCA)

@ 208V.....	1.63 A
@ 230V.....	1.50 A

Fuse Size.....15 A

External Finish.....Galvanized-steel Sheet

External Dimensions

Inches.....	15 H x 29-3/8 W x 35-7/16 D
mm.....	380 H x 745 W x 900 D

Net Weight.....98 lbs. / 44 kg

Coil Type.....Cross Fin
(Aluminum Plate Fin and Copper Tube)

Fan

Type x Quantity.....	Sirocco Fan x 1
Airflow Rate (Low - High).....	353 - 494 CFM
External Static Pressure	
@ 208V.....	0.40 - 1.00"WG
@ 230V.....	0.60 - 1.00"WG
Motor Type.....	1-phase induction motor

Refrigerant Piping Dimensions

Liquid (High Pressure).....	1/4" / 6.35 mm (Brazed)
Gas (Low Pressure).....	1/2" / 12.7 mm (Brazed)

Drainpipe Dimension.....O.D. 1-1/4" / 32 mm

Sound Pressure Levels

Low - High.....	39 - 45 dB(A)
-----------------	---------------

* Cooling / Heating capacity indicated at operation under the following conditions:

Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB,

Cooling | Outdoor 95° F (35° C) DB

Heating | Indoor: 70° F (21° C) DB,






Heating | Outdoor 47° F (8° C) DB / 43° F (6° C) WB

Notes:



Unit :mm(in.)

- Note 1. Use an M10 screw for the suspension bolt (field supply).
2. Keep the service space for the maintenance from the bottom when the heat exchanger is cleaned.
3. This drawing is for PEFY-P27-30-36-48-54NMHU-E2 models, which have 2 fans (PEFY-P27-30-36-48-54NMHU-E2 models have 1 fan, which have 2 fans PEFY-P27-51-78-24NMHU-E2 models have 1 fan).
4. Make sure to install the air filter (field supply) on the air intake side. In case field supplied air filter is used, attach it where the filter service is easily done.

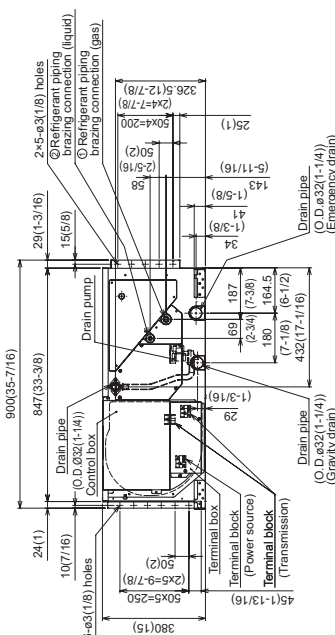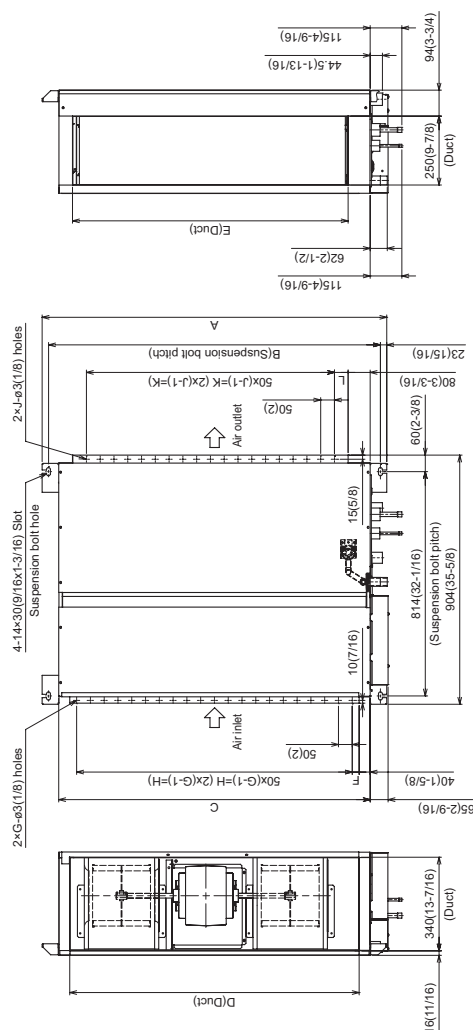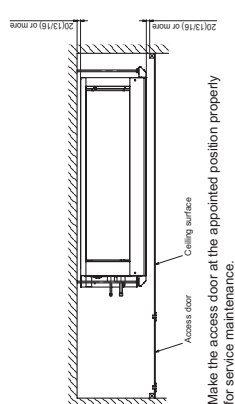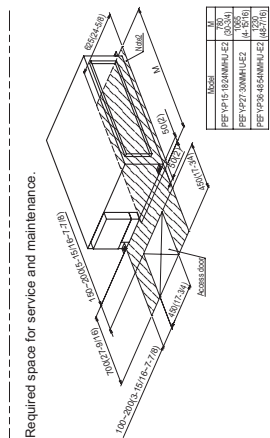

Model	A	B	C	D	E	F	G	H	J	K	L	② Gas pipe	③ Liquid pipe
PEP-P15 18MHU-E2	900	754	690	590	550	500	500	450	50	450	50	ø127	ø635 (104)
PEP-P20 18MHU-E2	900	754	690	590	550	500	500	450	50	450	50	ø127	ø635 (104)
PEP-P24 30MHU-E2	(31-116)	(29-116)	(26-1316)	(23-58)	(21-116)	(20)	11	(19-1116)	10	(13-304)	(2)		
PEP-P27 30MHU-E2	1065	1039	965	885	835	42.5	17	800	15	700	67	ø15.88 (5/8)	ø9.52 (3/8)
PEP-P32 30MHU-E2	(42-34)	(40-155)	(38)	(34-78)	(32-78)	(11-116)	17	(31-172)	10	900	50		
PEP-P36 30MHU-E2	1250	1204	1130	1050	1000	25	21	1000	10	900	50		



FORM# PEFY-P15NMHU-E2 - 201405

Specifications are subject to change without notice.
© 2014 Mitsubishi Electric US, Inc.



COOLING & HEATING

1340 Satellite Boulevard
Suwanee, GA 30024
Toll Free: 800-433-4822
www.mehvac.com