



Submittal Data Sheet
0.6-Ton Wall mounted Indoor Unit
CTXS07WVJU9

| Model | | | CTXS07WVJU9 | |
|---------------------------------|----------------|----------------------------------|---|-------------------|
| | | | Cooling | Heating |
| Power Supply | Phase | | 1φ | |
| | Hz, V | | 60 Hz, 208 - 230 V | |
| Rated Capacity | | | 7 kBtu/h Class | |
| Front Panel Color | | | White | |
| Airflow Rates | H | cfm (m ³ /min) | 332 (9.4) | 350 (9.9) |
| | M | | 261 (7.4) | 290 (8.2) |
| | L | | 194 (5.5) | 233 (6.6) |
| | SL | | 145 (4.1) | 219 (6.2) |
| Fan | Type | | Cross Flow Fan | |
| | Motor Output | HP | 0.03 | |
| | Speed | Steps | 5 Steps, Quiet, auto | |
| Air Direction Control | | | Right, Left, Horizontal, Downward | |
| Air Filter | | | Removable, Washable | |
| Running Current (Rated) | A | | 0.09 - 0.08 | 0.11 - 0.10 |
| Power Consumption (Rated) | W | | 18 - 18 | 21 - 21 |
| Power Factor (Rated) | % | | 96.2 - 97.8 | 91.8 - 91.3 |
| Temperature Control | | | Microcomputer Control | |
| Dimensions (H × W × D) | in. (mm) | | 11-5/8 × 31-1/2 × 8-7/16 (295 × 800 × 215) | |
| Packaged Dimensions (H × W × D) | in. (mm) | | 10-13/16 × 34-1/4 × 14-7/16 (274 × 870 × 366) | |
| Weight (Mass) | lbs (kg) | | 20 (9) | |
| Gross Weight (Gross Mass) | lbs (kg) | | 28 (13) | |
| Sound Pressure Level | H / M / L / SL | dB(A) | 38 / 32 / 25 / 22 | 38 / 33 / 28 / 25 |
| Sound Power Level | | dB | 54 | 54 |
| Heat Insulation | | | Both Liquid and Gas Pipes | |
| Piping Connection | Liquid | in. (mm) | φ 1/4 (φ 6.4) | |
| | Gas | in. (mm) | φ 3/8 (φ 9.5) | |
| | Drain | in. (mm) | φ 5/8 (φ 16) | |
| Note | | | SL: The quiet fan level of the airflow rate setting | |



Daikin Comfort Technologies North America, Inc 19001 Kermier Rd Waller TX 77484
Daikin City Generated Submittal Data www.daikincomfort.com or www.daikinac.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications, and information in this data sheet without notice and without incurring any obligations)

4. Dimensions



4.1 Indoor unit

CTXS07WVJU9, FTXS09/12WVJU9

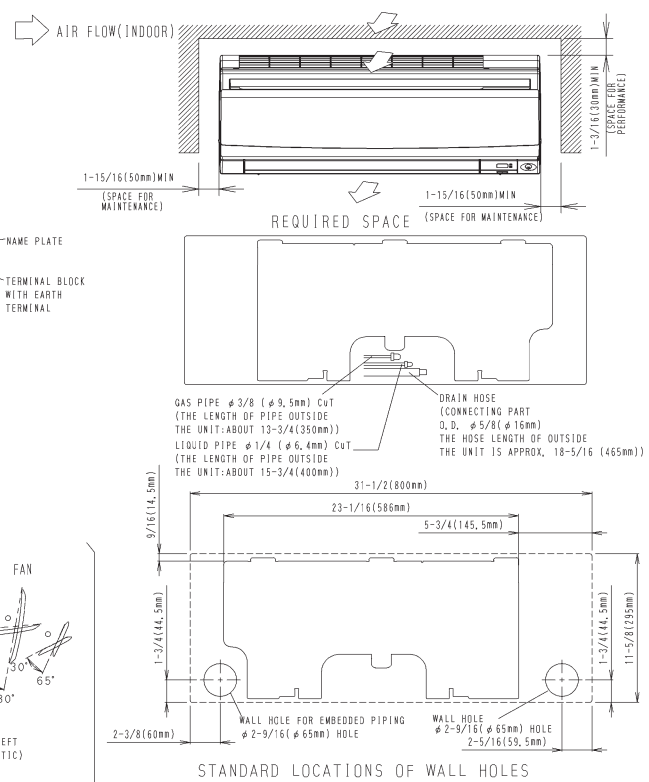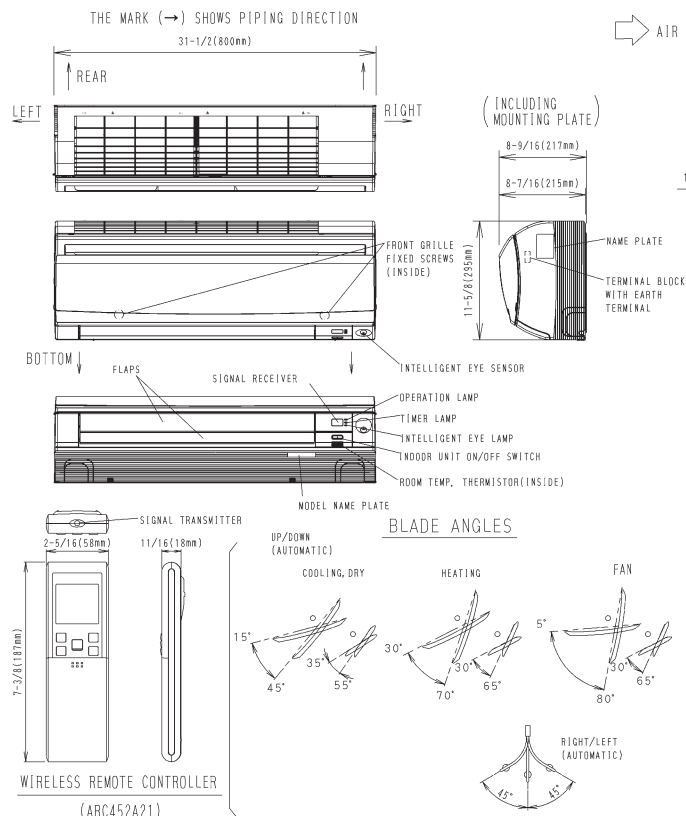

3D074094B

FTXS15/18WVJU9

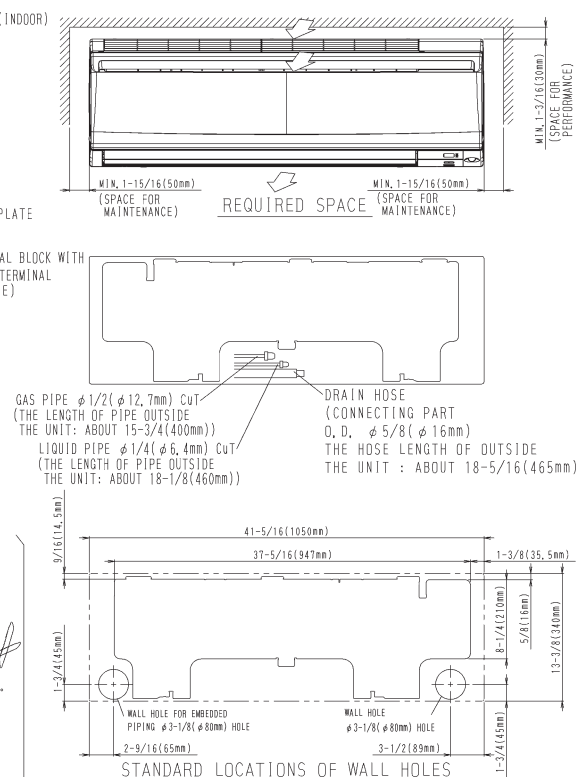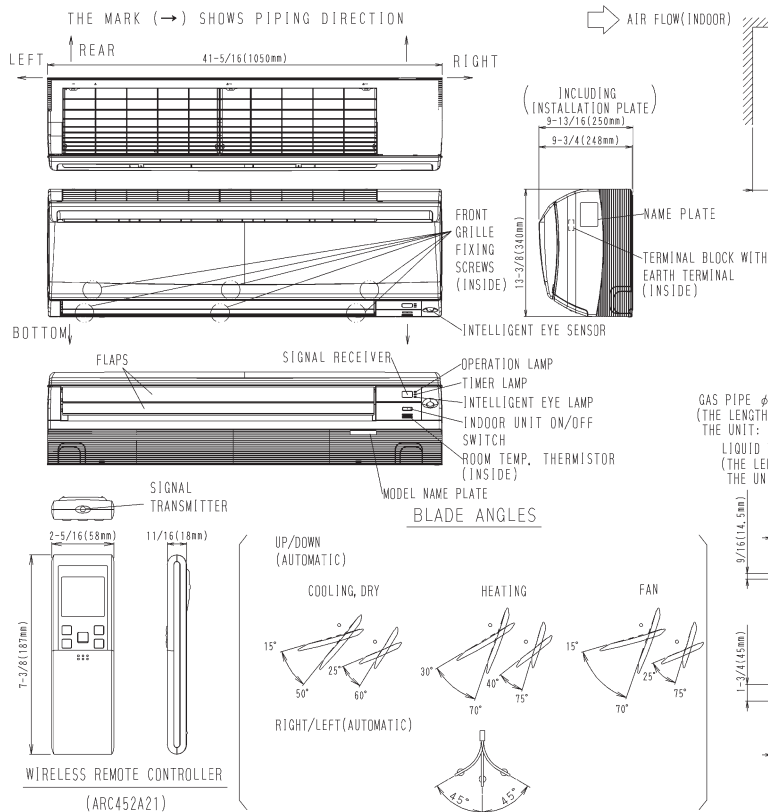

3D074024B